



TEST DATA OF TSC-600-□□□

Noise Filter
Sep. 06 , 2021

Approved by : Kazunari Asano
Design Manager

Prepared by : Kenji Kamoi
Design Engineer

COSEL CO.,LTD.





CONTENTS

1.Attenuation Characteristics	1
2.Leakage Current	3
3.Figure of Testing Circuitry	4
(Final Page 5)	



COSEL

Model	TSC-600-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

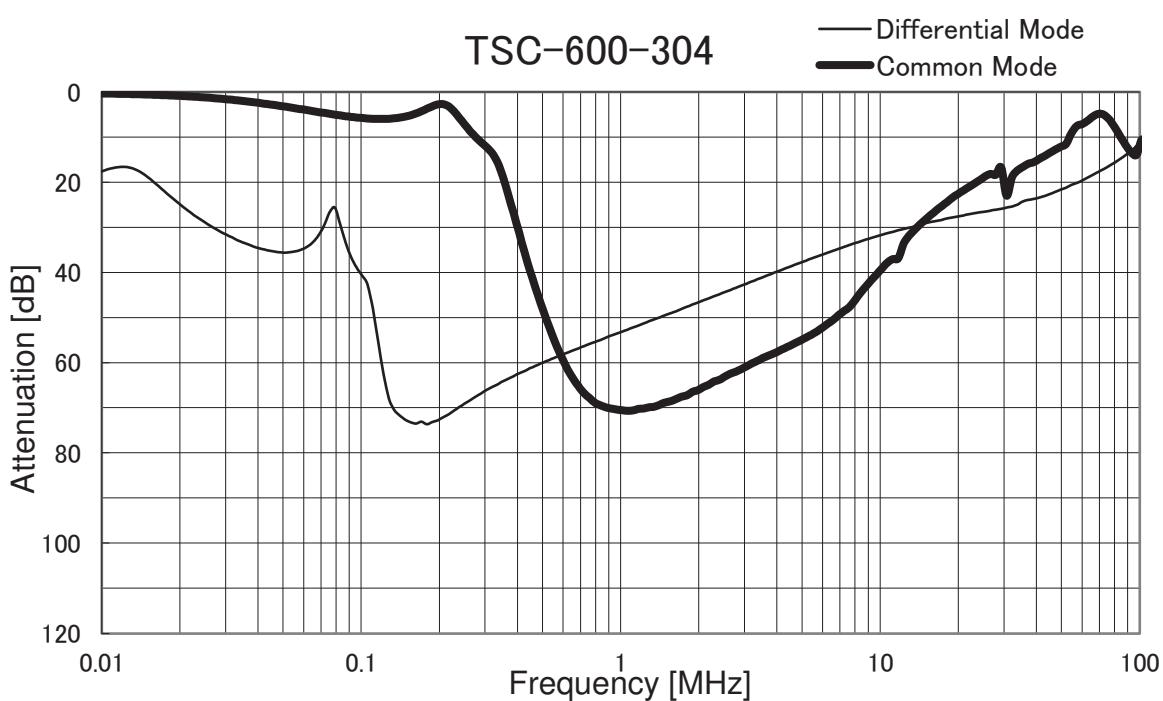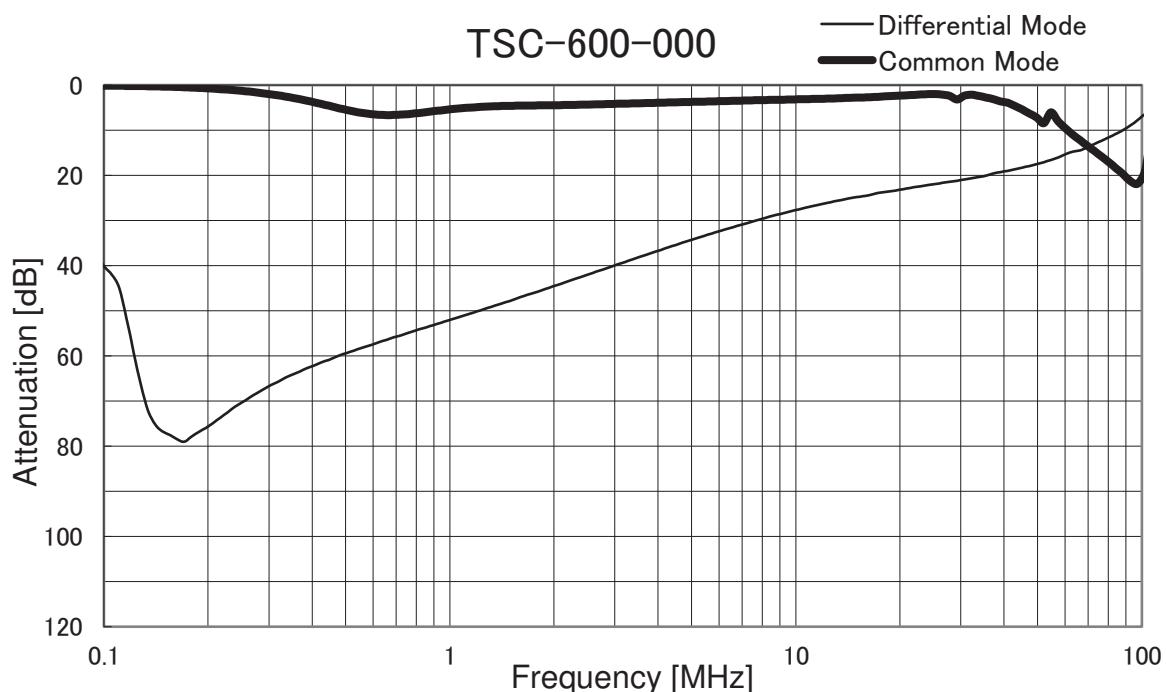

COSEL

Model	TSC-600-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

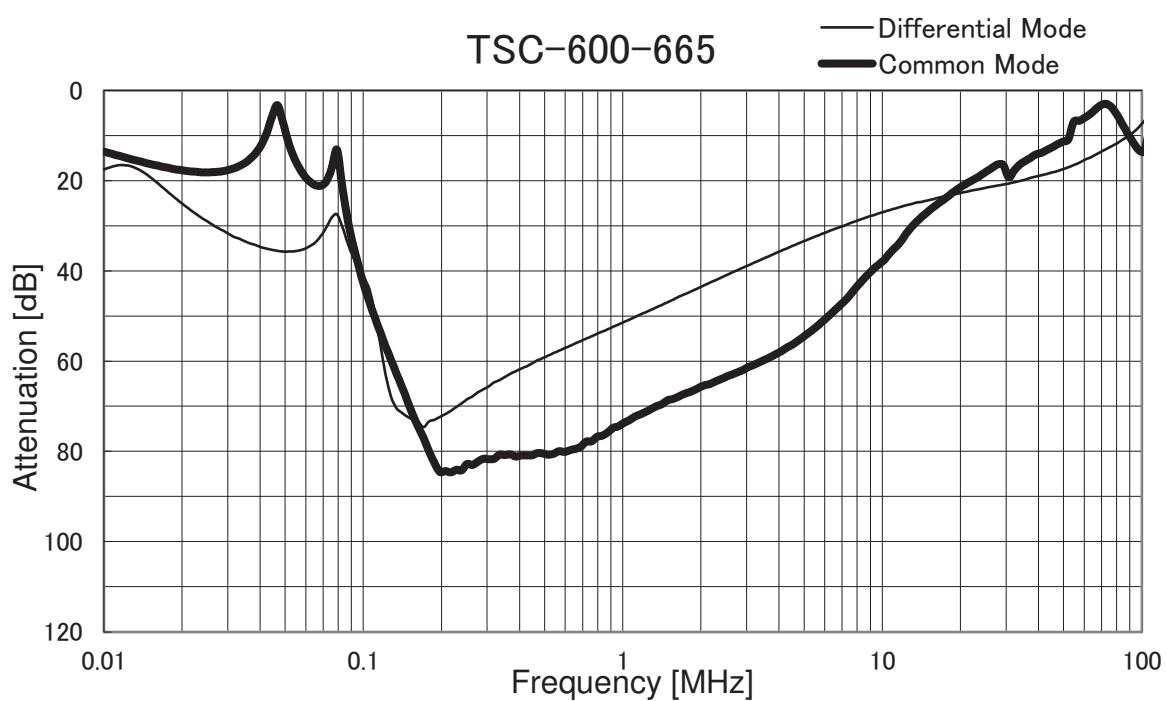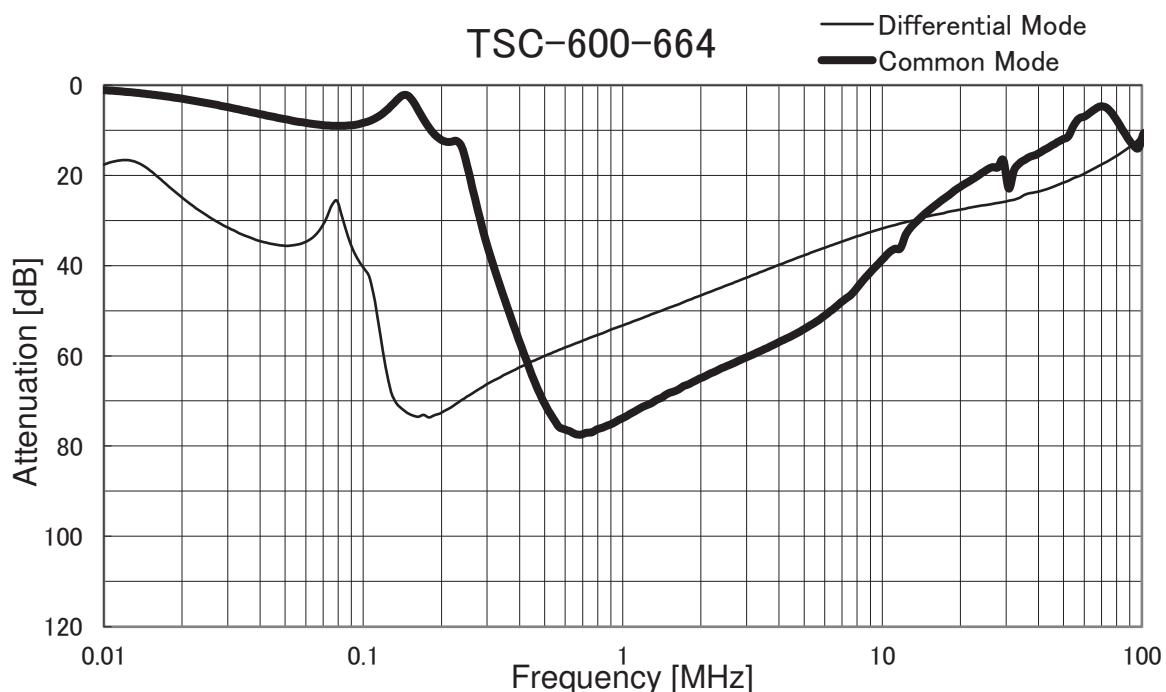



Model	TSC-600-□□□	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure B
Object	_____		


1. Results

[mA]

Model	Standards	Voltage system	Input Volt.					Note
			200[V]	250[V]	400[V]	480[V]	500[V]	
TSC-600-000	UL1283	Δ-connection	0.01	0.02	0.03	0.03	0.04	
		Y-connection	0.00	0.00	0.00	0.00	0.00	
TSC-600-304	UL1283	Δ-connection	6.2	8.0	13	15	16	
		Y-connection	0.01	0.01	0.02	0.03	0.03	
TSC-600-664	UL1283	Δ-connection	13	17	27	32	34	
		Y-connection	0.02	0.03	0.04	0.05	0.05	
TSC-600-665	UL1283	Δ-connection	64	80	128			Δ-connection's rated voltage is 400V(440Vmax)
		Y-connection	0.22	0.27	0.44	0.52	0.55	

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

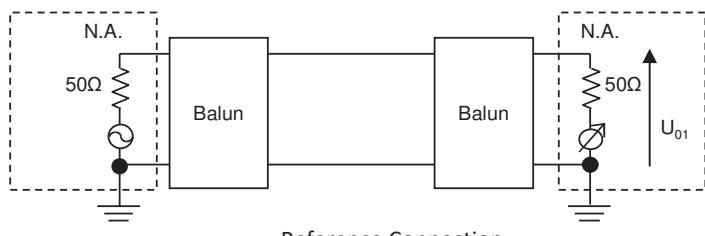

Attenuation = $20\log(U_{01}/U_{02})$ [dB]
 U_{01} : Voltage in state without filters
 U_{02} : Voltage in state which added filters
N.A. : Network Analyzer


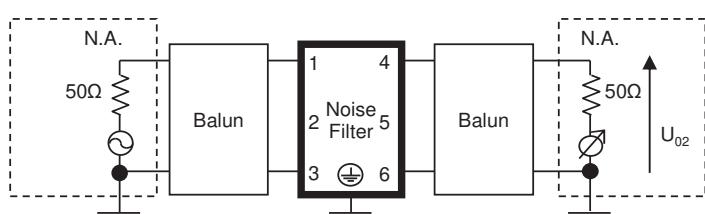


Figure A - 1 Differential mode attenuation measurement

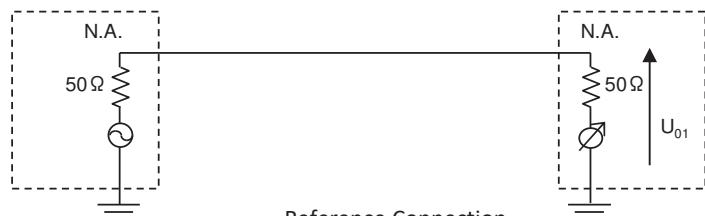

Attenuation = $20\log(U_{01}/U_{02})$ [dB]
 U_{01} : Voltage in state without filters
 U_{02} : Voltage in state which added filters
N.A. : Network Analyzer

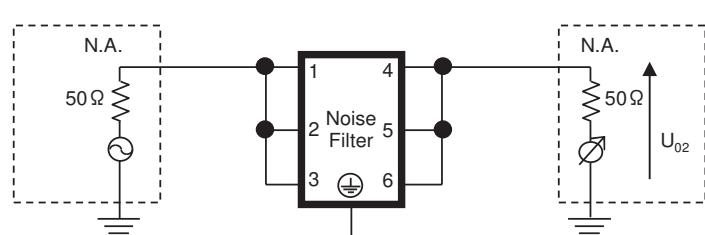


Figure A - 2 Common mode attenuation measurement

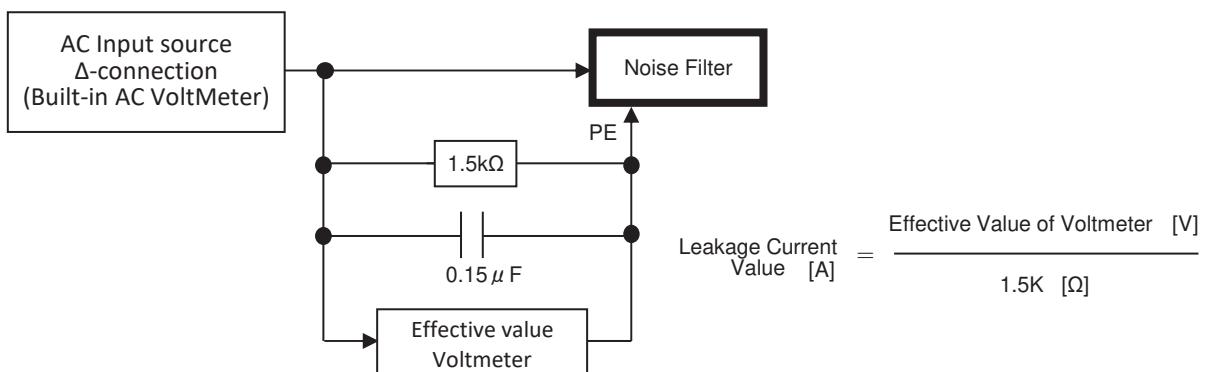


Figure B - 1 Leakage current measurement (UL1283 Δ-connection)

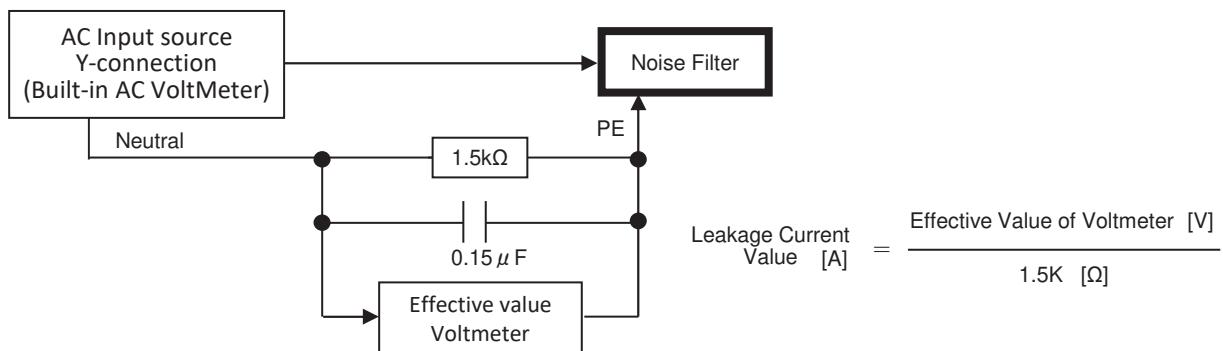


Figure B - 2 Leakage current measurement (UL1283 Y-connection)