



TEST DATA OF ZUW1R54812
(48.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Shigimori
Design Manager

Prepared by : K. Shimano
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	6
リップルノイズ	
6. Overcurrent Protection	8
過電流保護	
7. Dynamic Load Responce	9
動的負荷変動	
8. Rise and Fall Time	11
立ち上り、立下がり時間	
9. Ambient Temperature Drift	13
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage	14
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	15
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	16
経時ドリフト	
13. Output Voltage Accuracy	17
定電圧精度	
14. Condensation	18
結露特性	
15. Figure of Testing Circuitry	20
測定回路図	

(Final Page 20)

COSEL

Model	ZUW1R54812	Temperature Testing Circuitry	25°C Figure A																																									
Item	Line Regulation 静的入力変動																																											
Object	+12V 0.065A																																											
1. Graph	<p style="text-align: center;">-----□----- Load 50% -----△----- Load 100%</p>	2. Values																																										
		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>33.0</td><td>11.977</td><td>11.865</td></tr> <tr><td>36.0</td><td>11.973</td><td>11.866</td></tr> <tr><td>42.0</td><td>11.967</td><td>11.866</td></tr> <tr><td>48.0</td><td>11.962</td><td>11.865</td></tr> <tr><td>54.0</td><td>11.959</td><td>11.865</td></tr> <tr><td>60.0</td><td>11.956</td><td>11.864</td></tr> <tr><td>66.0</td><td>11.953</td><td>11.863</td></tr> <tr><td>72.0</td><td>11.952</td><td>11.862</td></tr> <tr><td>75.0</td><td>11.951</td><td>11.862</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	33.0	11.977	11.865	36.0	11.973	11.866	42.0	11.967	11.866	48.0	11.962	11.865	54.0	11.959	11.865	60.0	11.956	11.864	66.0	11.953	11.863	72.0	11.952	11.862	75.0	11.951	11.862	-	-	-	-	-	-	-	-	-	
Input Voltage [V]	Load 50%	Load 100%																																										
	Output Volt. [V]	Output Volt. [V]																																										
33.0	11.977	11.865																																										
36.0	11.973	11.866																																										
42.0	11.967	11.866																																										
48.0	11.962	11.865																																										
54.0	11.959	11.865																																										
60.0	11.956	11.864																																										
66.0	11.953	11.863																																										
72.0	11.952	11.862																																										
75.0	11.951	11.862																																										
-	-	-																																										
-	-	-																																										
-	-	-																																										
Object	-12V 0.065A	2. Values																																										
1. Graph	<p style="text-align: center;">-----□----- Load 50% -----△----- Load 100%</p>	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>33.0</td><td>-11.922</td><td>-11.804</td></tr> <tr><td>36.0</td><td>-11.918</td><td>-11.806</td></tr> <tr><td>42.0</td><td>-11.913</td><td>-11.809</td></tr> <tr><td>48.0</td><td>-11.910</td><td>-11.809</td></tr> <tr><td>54.0</td><td>-11.907</td><td>-11.810</td></tr> <tr><td>60.0</td><td>-11.904</td><td>-11.809</td></tr> <tr><td>66.0</td><td>-11.903</td><td>-11.809</td></tr> <tr><td>72.0</td><td>-11.901</td><td>-11.809</td></tr> <tr><td>75.0</td><td>-11.900</td><td>-11.809</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	33.0	-11.922	-11.804	36.0	-11.918	-11.806	42.0	-11.913	-11.809	48.0	-11.910	-11.809	54.0	-11.907	-11.810	60.0	-11.904	-11.809	66.0	-11.903	-11.809	72.0	-11.901	-11.809	75.0	-11.900	-11.809	-	-	-	-	-	-	-	-	-	
Input Voltage [V]	Load 50%	Load 100%																																										
	Output Volt. [V]	Output Volt. [V]																																										
33.0	-11.922	-11.804																																										
36.0	-11.918	-11.806																																										
42.0	-11.913	-11.809																																										
48.0	-11.910	-11.809																																										
54.0	-11.907	-11.810																																										
60.0	-11.904	-11.809																																										
66.0	-11.903	-11.809																																										
72.0	-11.901	-11.809																																										
75.0	-11.900	-11.809																																										
-	-	-																																										
-	-	-																																										
-	-	-																																										

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model	ZUW1R54812
Item	Efficiency 効率
Object	_____
1. Graph	
<p>The graph plots Efficiency [%] on the y-axis (0 to 80) against Input Voltage [V] on the x-axis (0 to 80). Two sets of data points are shown: Load 50% (dashed line with open squares) and Load 100% (solid line with open triangles). Both sets show a general decrease in efficiency as input voltage increases. A slanted line on the graph indicates the range of the rated input voltage.</p>	

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	67.7	72.3
36.0	66.9	72.8
42.0	63.8	72.3
48.0	61.6	71.3
54.0	58.9	70.5
60.0	56.0	68.9
66.0	53.0	67.0
72.0	50.5	65.3
75.0	49.6	64.0
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	ZUW1R54812
Item	Load Regulation 靜的負荷變動
Object	+12V 0.065A
1. Graph	

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current	Input Volt.	Input Volt.	Input Volt.
	36.0[V]	48.0[V]	72.0[V]
Output	Output	Output	Output
[A]	Volt. [V]	Volt. [V]	Volt. [V]
0.000	12.144	12.138	12.133
0.010	12.059	12.046	12.034
0.020	12.014	12.002	11.991
0.030	11.978	11.968	11.957
0.040	11.943	11.935	11.926
0.050	11.911	11.906	11.899
0.060	11.879	11.877	11.872
0.065	11.863	11.863	11.859
0.072	11.842	11.844	11.843
-	-	-	-

Object	-12V 0.065A
1. Graph	

2. Values


Load Current	Input Volt.	Input Volt.	Input Volt.
	36.0[V]	48.0[V]	72.0[V]
Output	Output	Output	Output
[A]	Volt. [V]	Volt. [V]	Volt. [V]
0.000	-12.070	-12.061	-12.055
0.010	-11.997	-11.987	-11.976
0.020	-11.954	-11.945	-11.935
0.030	-11.916	-11.908	-11.900
0.040	-11.881	-11.876	-11.870
0.050	-11.847	-11.845	-11.841
0.060	-11.815	-11.817	-11.815
0.065	-11.797	-11.802	-11.801
0.072	-11.774	-11.782	-11.784
-	-	-	-

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	ZUW1R54812
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)
Object	+12V 0.065A

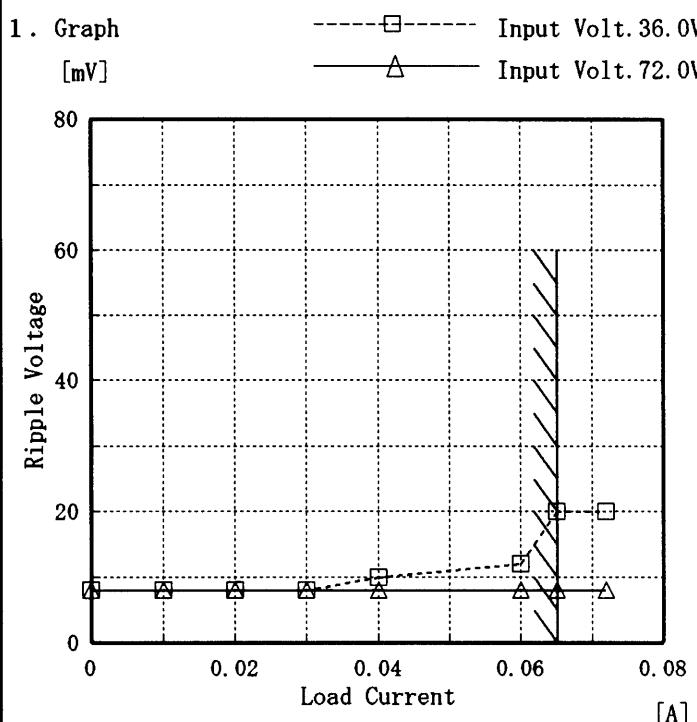Temperature
Testing Circuitry 25°C
Figure A

2. Values

Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	8	8
0.010	8	8
0.020	8	8
0.030	8	8
0.040	10	8
0.060	12	8
0.065	20	8
0.072	20	8
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

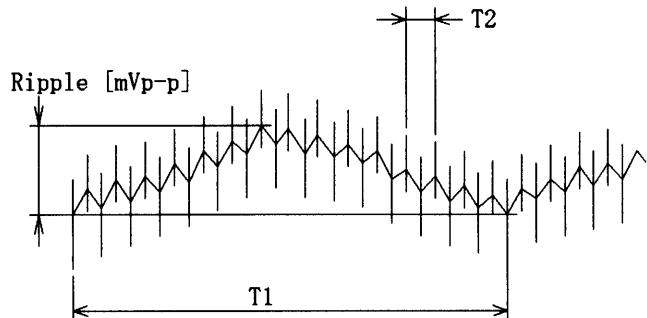
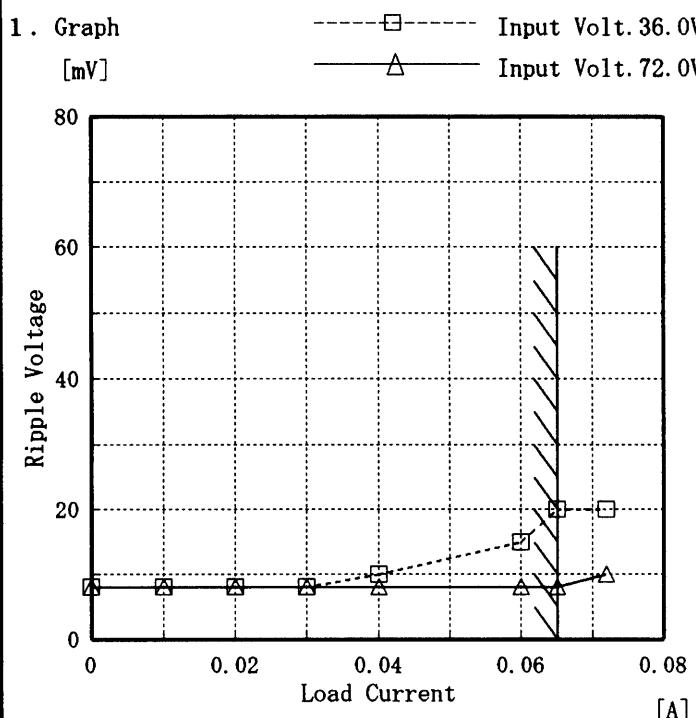


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Model	ZUW1R54812
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)
Object	-12V 0.065A

Temperature
Testing Circuitry 25°C
Figure A

2. Values

Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.000	8	8
0.010	8	8
0.020	8	8
0.030	8	8
0.040	10	8
0.060	15	8
0.065	20	8
0.072	20	10
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

- T1: Due to AC Input Line
入力商用周期
- T2: Due to Switching
スイッチング周期

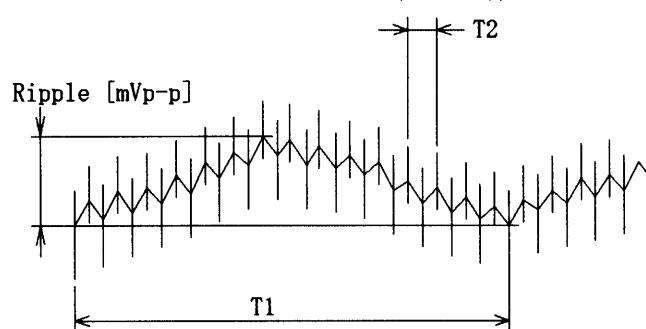
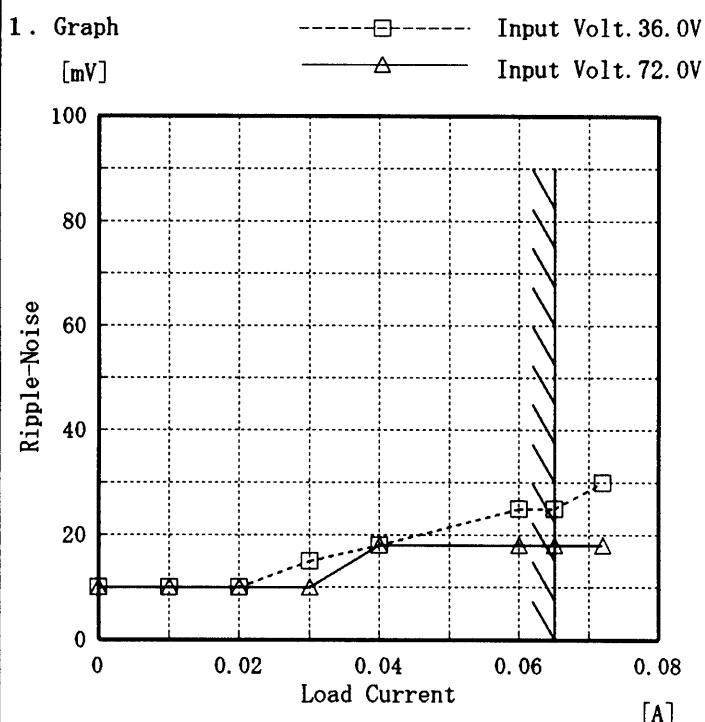


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Model	ZUW1R54812
Item	Ripple-Noise リップルノイズ
Object	+12V 0.065A

Temperature
Testing Circuitry 25°C
Figure A

2. Values

Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.000	10	10
0.010	10	10
0.020	10	10
0.030	15	10
0.040	18	18
0.060	25	18
0.065	25	18
0.072	30	18
-	-	-
-	-	-
-	-	-

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。
(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期
T2: Due to Switching
スイッチング周期

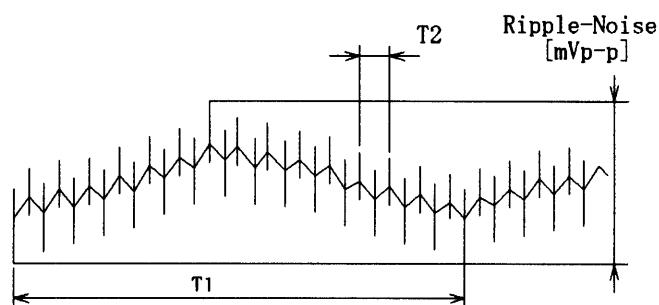
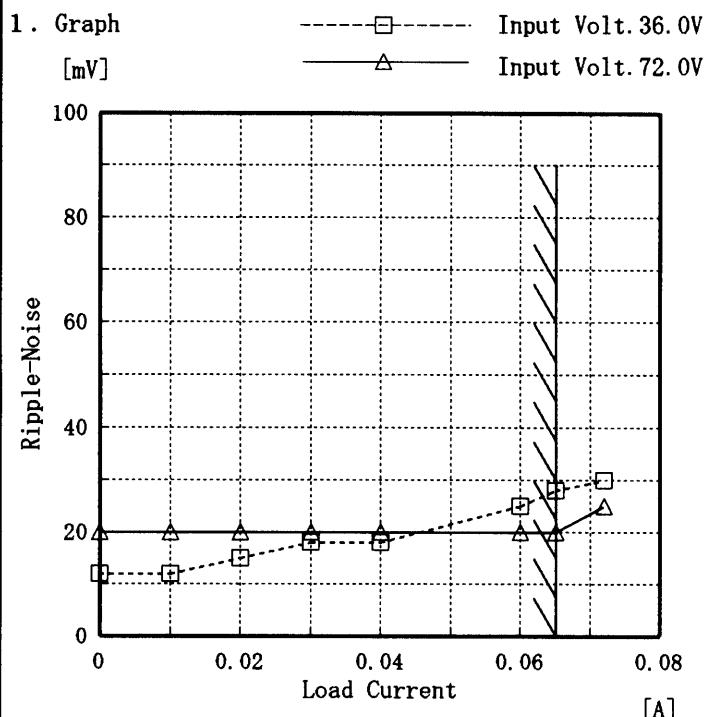


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Model	ZUW1R54812
Item	Ripple-Noise リップルノイズ
Object	-12V 0.065A

Temperature
Testing Circuitry 25°C
Figure A

2. Values

Load current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple-Noise [mV]	Ripple-Noise [mV]
0.000	12	20
0.010	12	20
0.020	15	20
0.030	18	20
0.040	18	20
0.060	25	20
0.065	28	20
0.072	30	25
—	—	—
—	—	—
—	—	—

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。
(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期
T2: Due to Switching
スイッチング周期

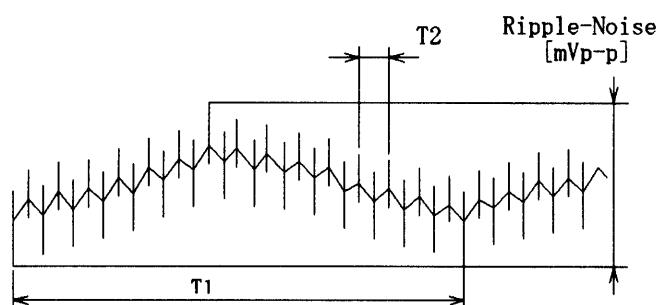


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Model	ZUW1R54812
Item	Overcurrent Protection 過電流保護
Object	+12V 0.065A
1. Graph	<p style="text-align: center;"> </p> <p>Output Voltage [V] vs Load Current [A]. The graph shows three curves corresponding to Input Voltages of 36.0V, 48.0V, and 72.0V. The curves show a sharp drop in output voltage as load current increases beyond the rated value (approximately 0.065A), indicated by a diagonal hatched line.</p>

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
12.00	0.104	0.115	0.106
11.40	0.113	0.115	0.107
10.80	0.114	0.116	0.108
9.60	0.116	0.117	0.108
8.40	0.117	0.117	0.109
7.20	0.117	0.115	0.108
6.00	0.116	0.113	0.107
4.80	0.113	0.112	0.107
3.60	0.115	0.112	0.107
2.40	0.122	0.119	0.113
1.20	0.098	0.131	0.126
0.00	0.134	0.177	0.192

Object	-12V 0.065A
1. Graph	<p style="text-align: center;"> </p> <p>Output Voltage [V] vs Load Current [A]. The graph shows three curves corresponding to Input Voltages of 36.0V, 48.0V, and 72.0V. The curves show a sharp drop in output voltage as load current increases beyond the rated value (approximately 0.065A), indicated by a diagonal hatched line.</p>

2. Values

Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
-12.00	0.081	0.086	0.100
-11.40	0.116	0.118	0.110
-10.80	0.117	0.119	0.111
-9.60	0.119	0.120	0.112
-8.40	0.121	0.120	0.113
-7.20	0.121	0.119	0.112
-6.00	0.120	0.118	0.112
-4.80	0.118	0.116	0.111
-3.60	0.120	0.117	0.112
-2.40	0.127	0.124	0.118
-1.20	0.099	0.136	0.131
0.00	0.130	0.171	0.186

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSSEL

Model	ZUW1R24812	Temperature Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷變動	
Object	+12V 0.065A	

Input Volt. 48.0 V



Cycle 100 mS



Min. Load →

Load 100 %



200 mV/div

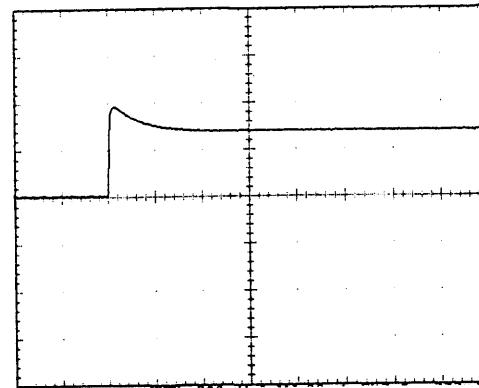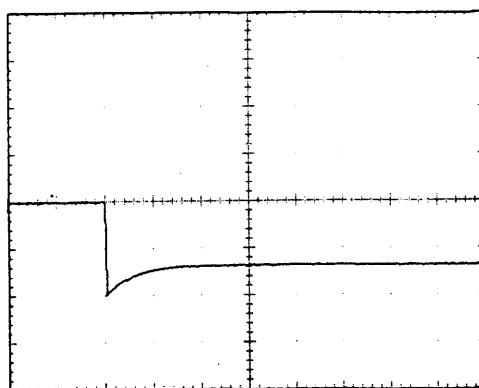

Min. Load →

Load 50 %



200 mV/div

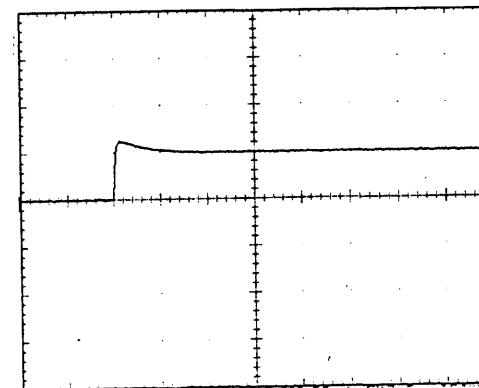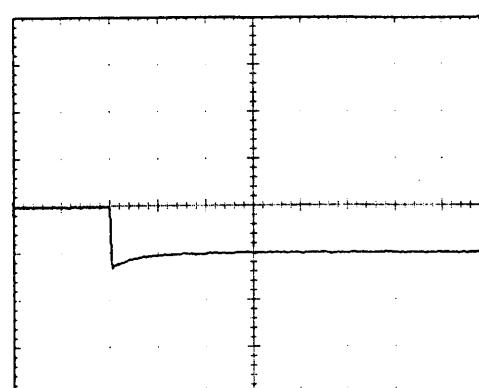

Load 50%→

Load 100 %

200 mV/div

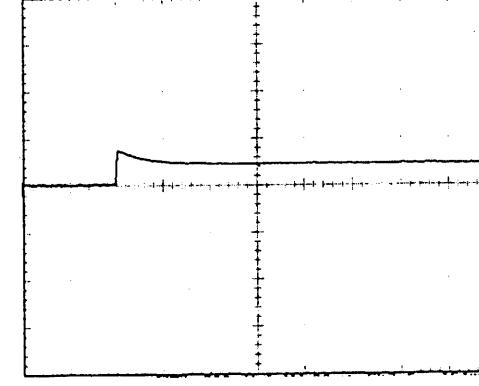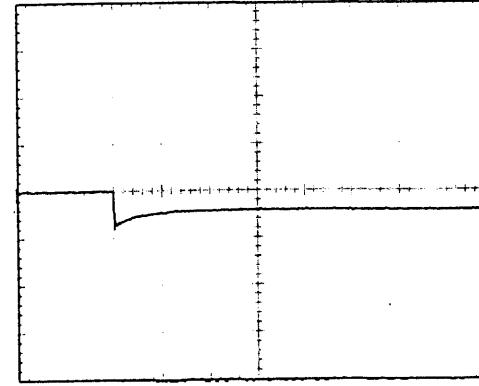

1 mS/div

COSSEL


Model	ZUW1R54812	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response 動的負荷變動	
Object	-12V 0.065A	

Input Volt. 48.0 V


Cycle 100 mS

Load CurrentMin. Load ←
Load 100 %


200 mV/div

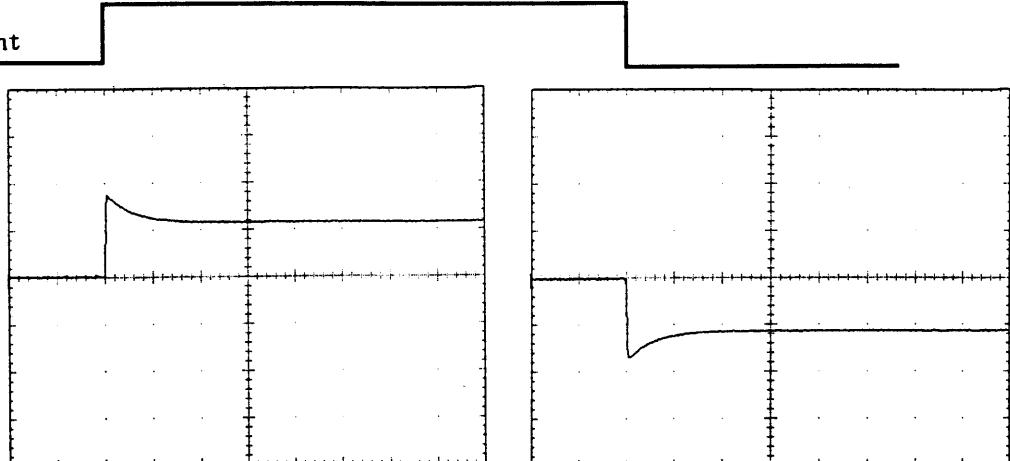Min. Load ←
Load 50 %

200 mV/div

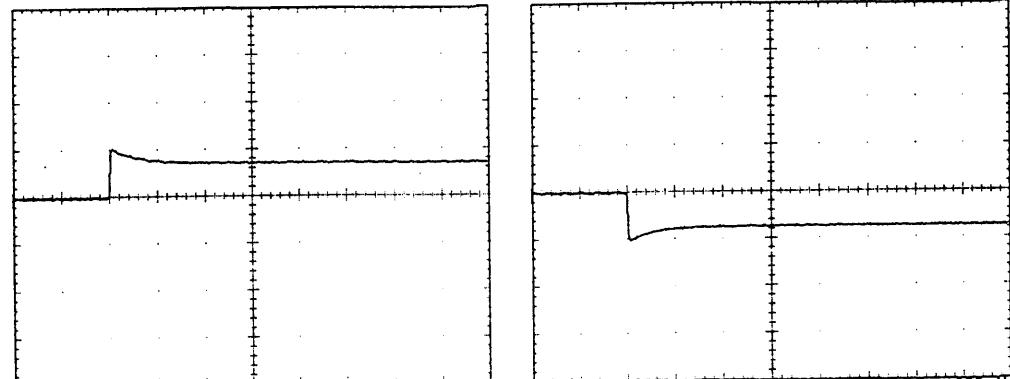Load 50%←
Load 100 %

200 mV/div

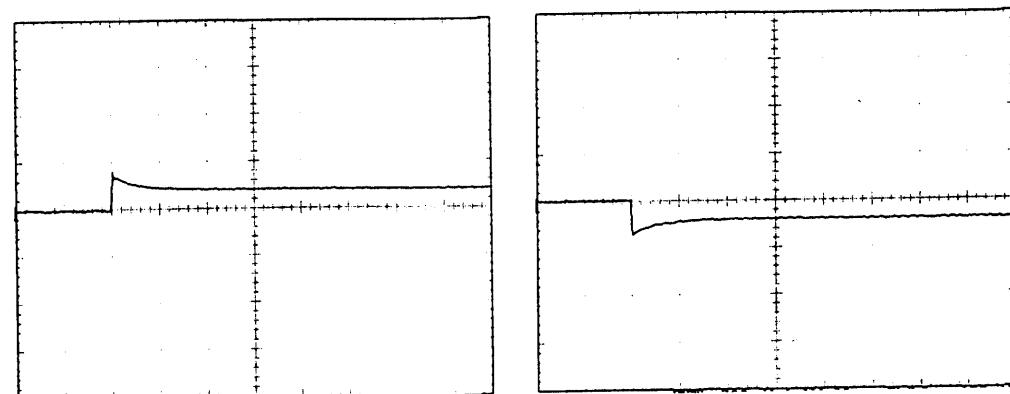

1 mS/div

COSEL


Model ZUW1R54812

Item Rise and Fall Time 立上り、立下り時間

Temperature 25°C
Testing Circuitry Figure A


Object +12V 0.065A

1. Graph

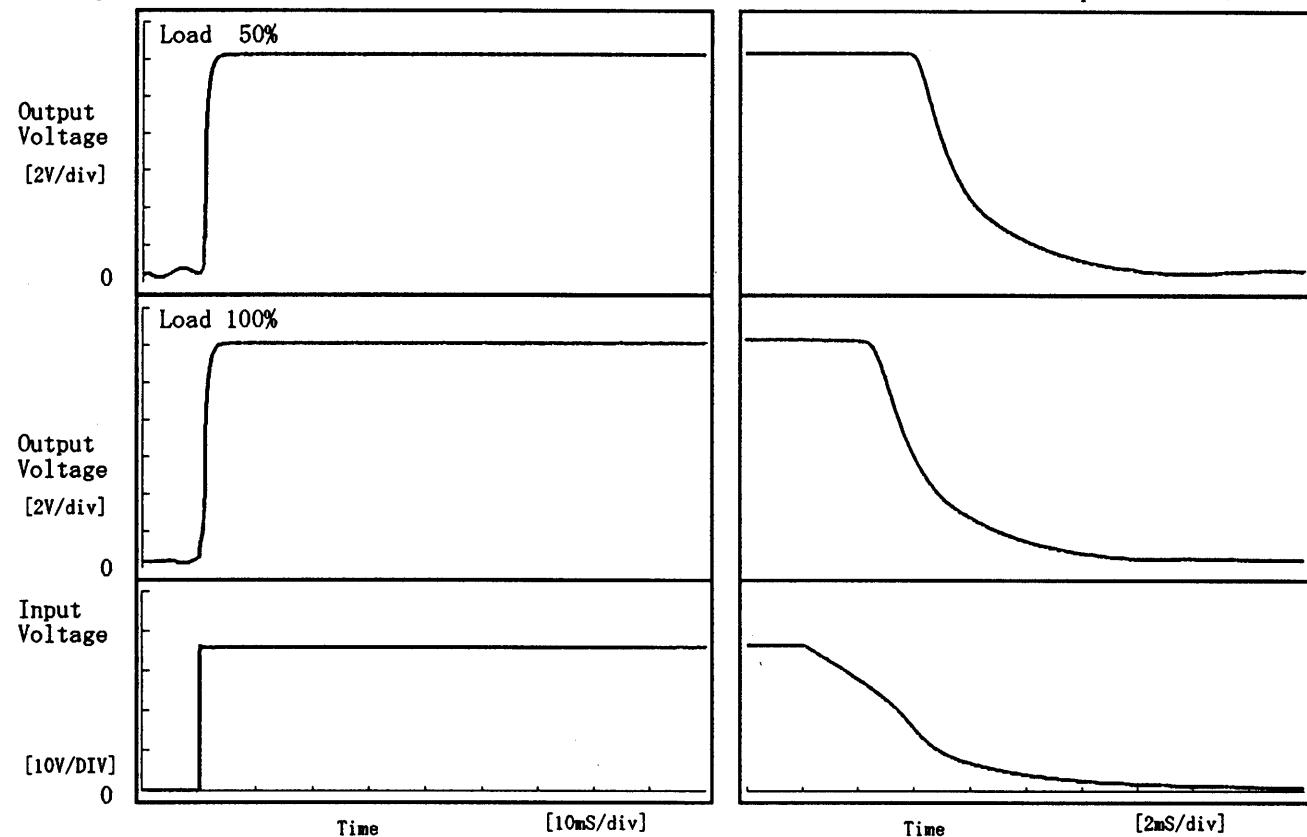

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		0.10	1.75	1.85	4.33	4.97	
100 %		0.10	1.85	1.95	2.79	5.14	

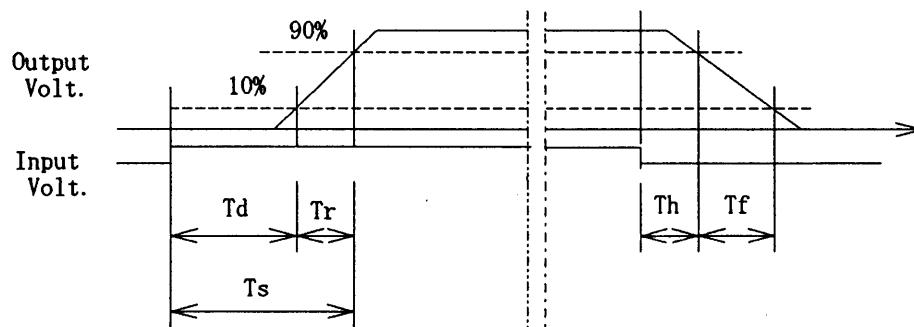


COSEL

Model	ZUW1R54812
Item	Rise and Fall Time 立上り、立下り時間
Object	-12V 0.065A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

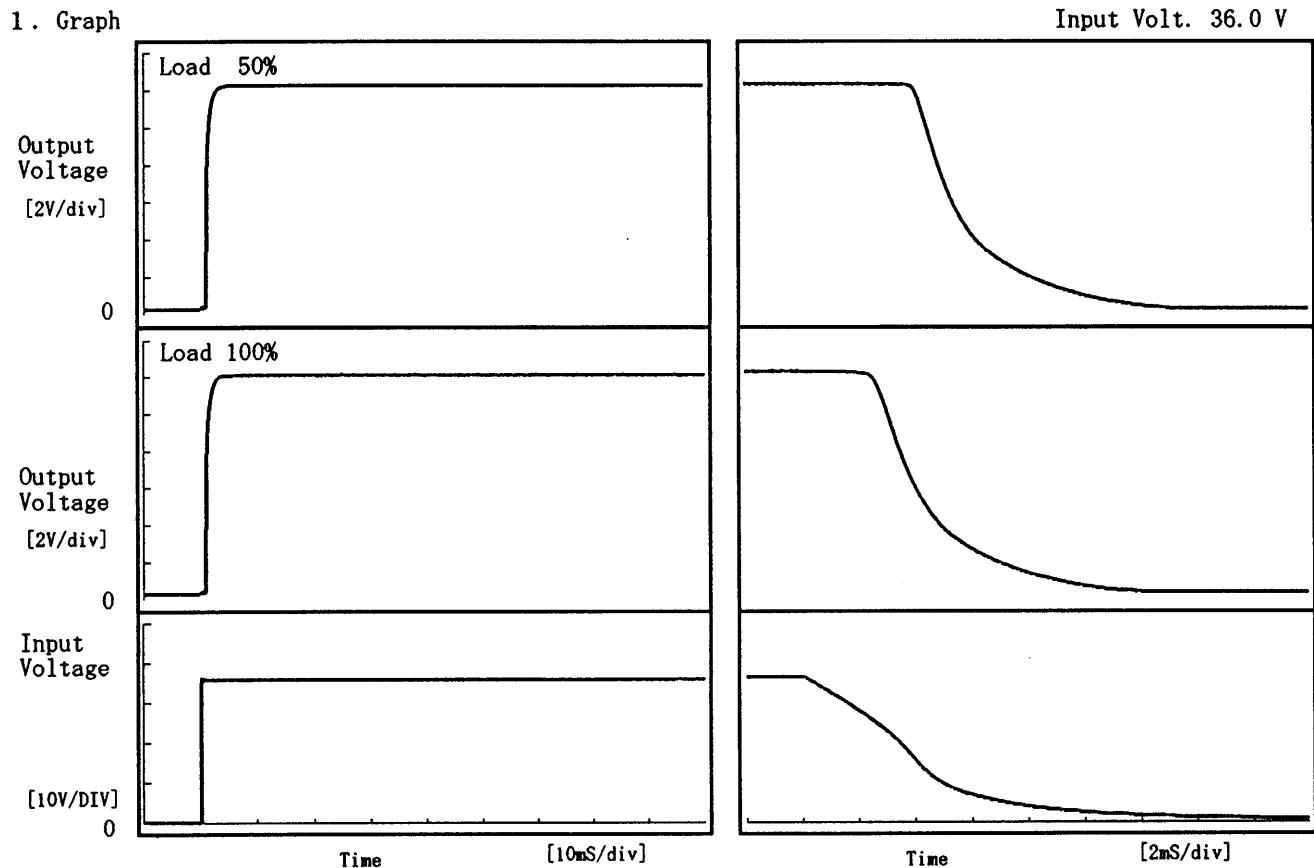



2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f
50 %		0.85	1.00	1.85	4.22	4.78
100 %		0.85	1.10	1.95	2.78	4.97

[mS]

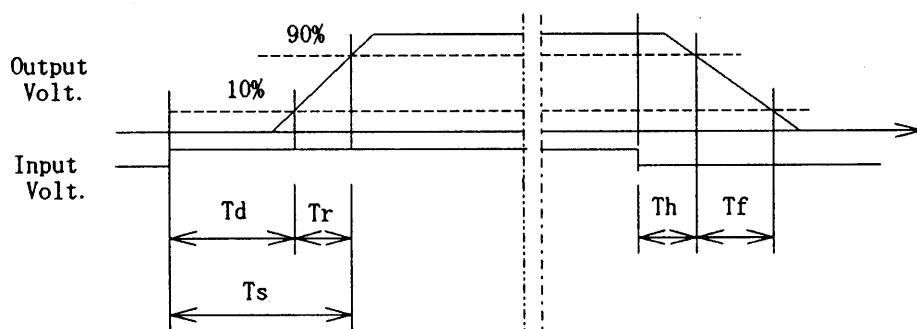



COSEL

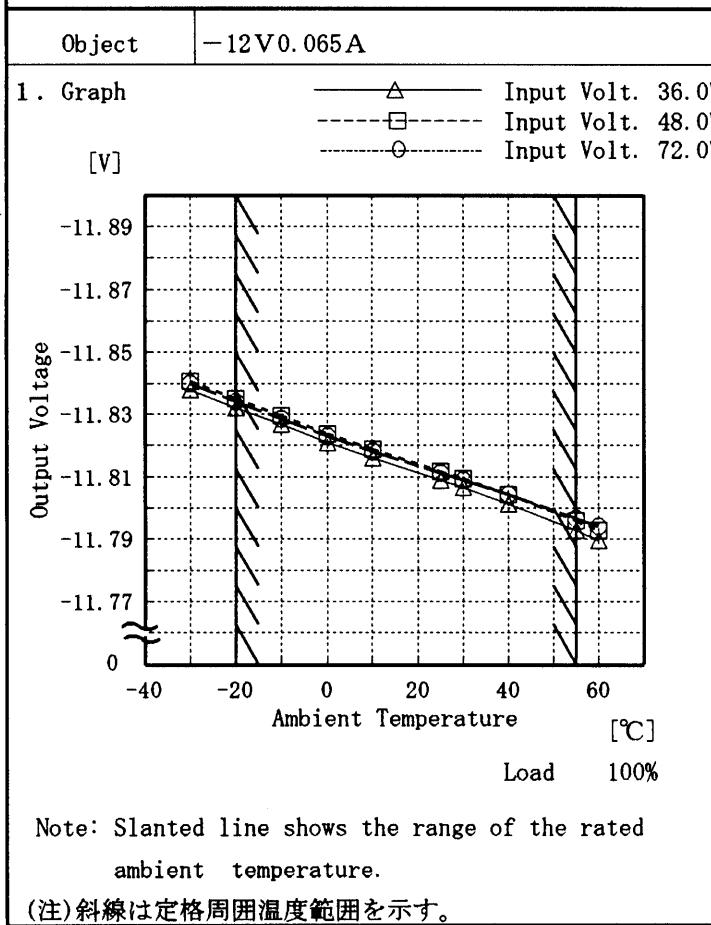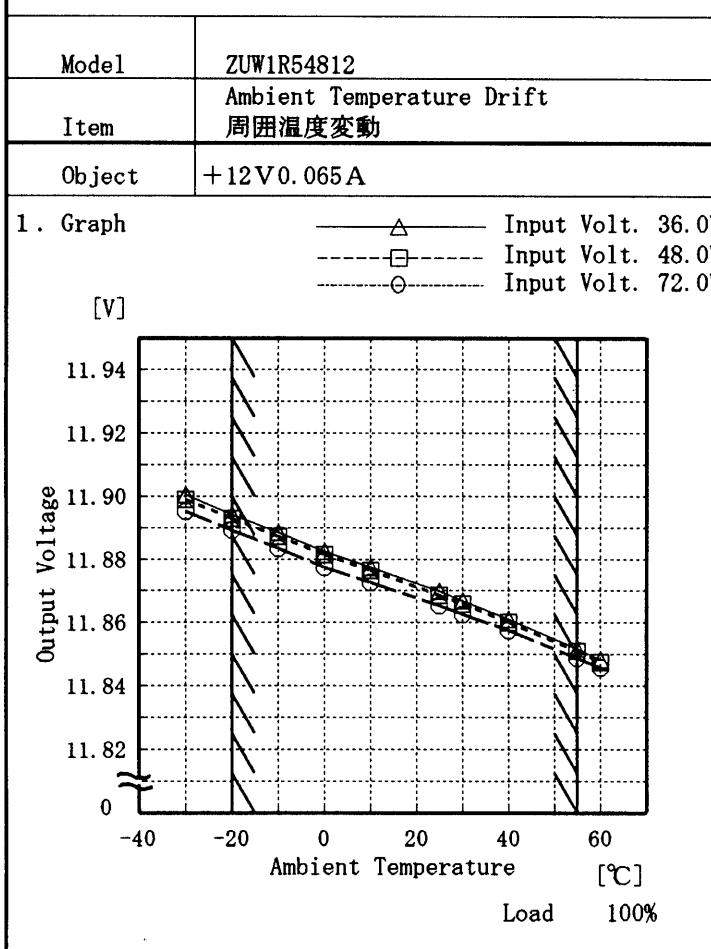

Testing Circuitry Figure A

COSSEL

Model	ZUW1R54812
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12V 0.065A

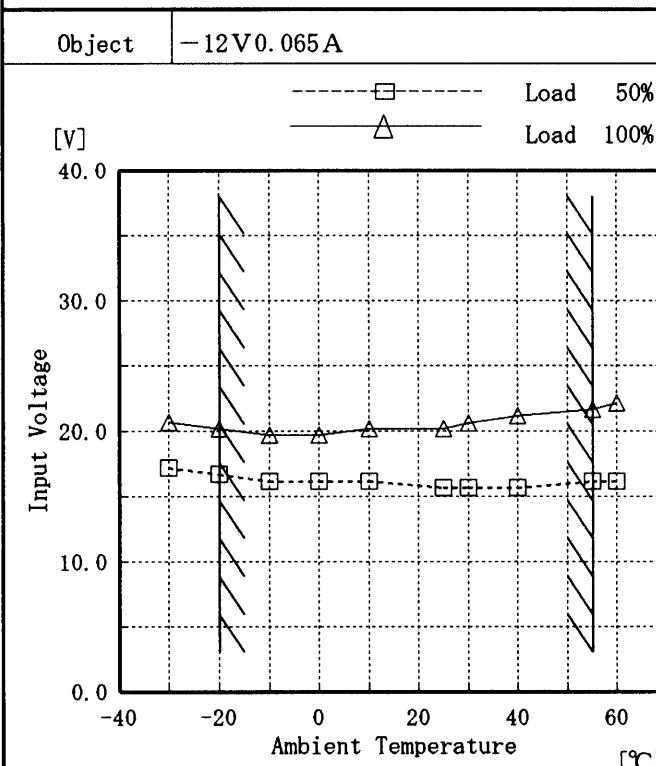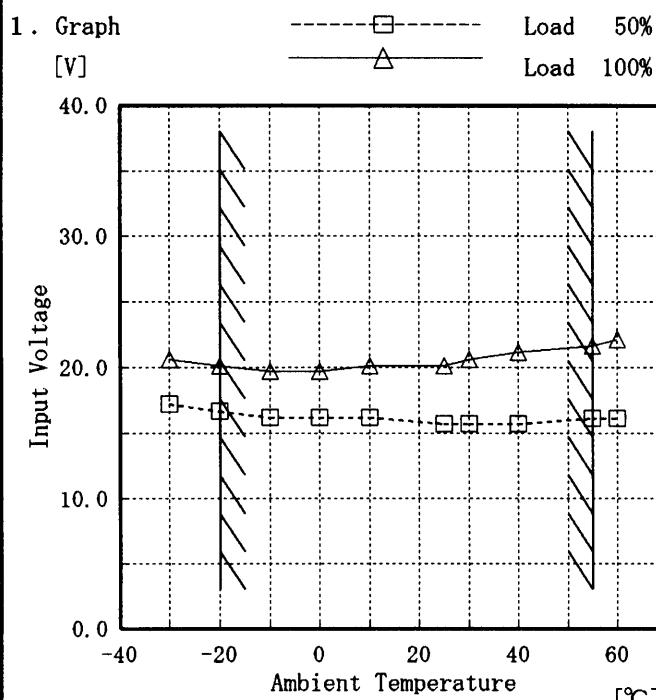

Note: Slanted line shows the range of the rated ambient temperature.


(注)斜線は定格周囲温度範囲を示す。

COSEL

Model	ZUW1R54812
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+12V 0.065A


Testing Circuitry

Figure A

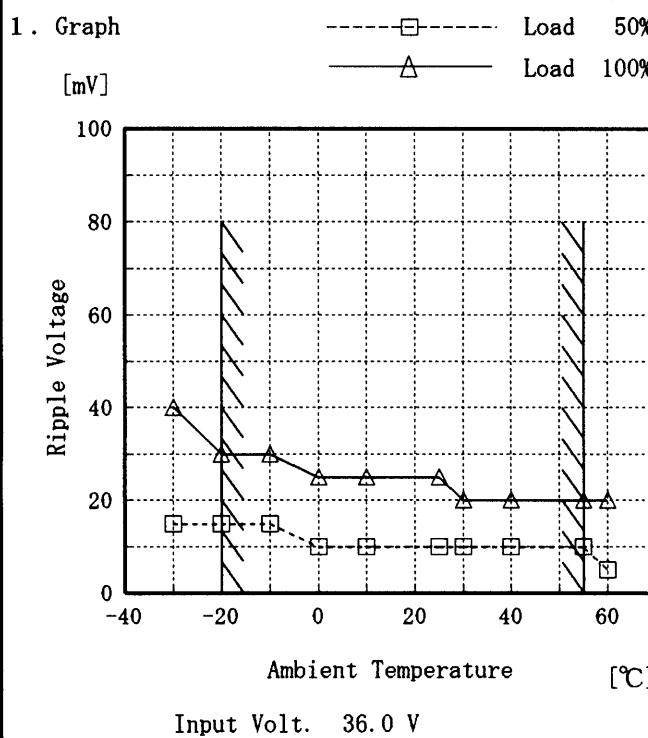

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	15	40
-20	15	30
-10	15	30
0	10	25
10	10	25
25	10	25
30	10	20
40	10	20
55	10	20
60	5	20
—	—	—

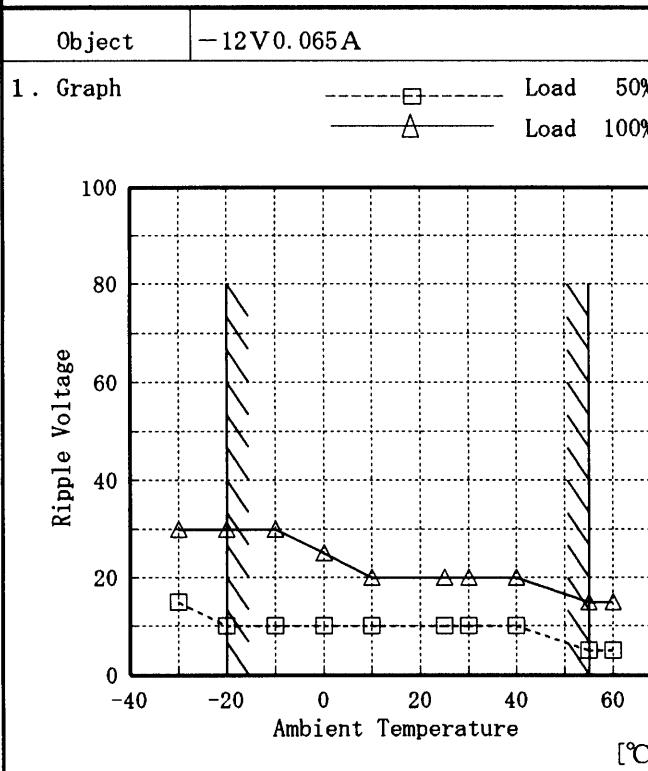



2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	15	30
-20	10	30
-10	10	30
0	10	25
10	10	20
25	10	20
30	10	20
40	10	20
55	5	15
60	5	15
—	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL

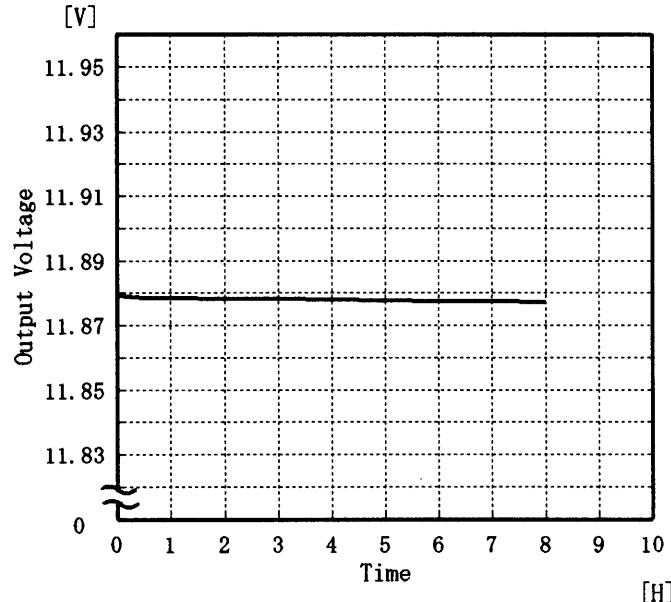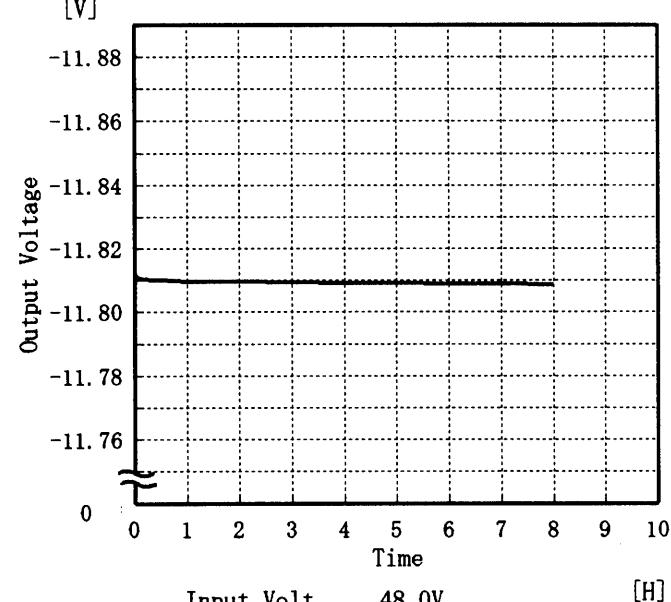Model	ZUW1R54812	Temperature Testing Circuitry	25 °C																						
Item	Time Lapse Drift 経時ドリフト		Figure A																						
Object	+12V0.065A																								
1. Graph																									
 <p>[V]</p> <p>Output Voltage</p> <p>Time [H]</p> <p>Input Volt. 48.0V</p> <p>Load 100%</p>			2. Values																						
			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>11.879</td></tr> <tr><td>0.5</td><td>11.879</td></tr> <tr><td>1.0</td><td>11.879</td></tr> <tr><td>2.0</td><td>11.878</td></tr> <tr><td>3.0</td><td>11.878</td></tr> <tr><td>4.0</td><td>11.878</td></tr> <tr><td>5.0</td><td>11.878</td></tr> <tr><td>6.0</td><td>11.878</td></tr> <tr><td>7.0</td><td>11.878</td></tr> <tr><td>8.0</td><td>11.877</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	11.879	0.5	11.879	1.0	11.879	2.0	11.878	3.0	11.878	4.0	11.878	5.0	11.878	6.0	11.878	7.0	11.878	8.0	11.877
Time since start [H]	Output Voltage [V]																								
0.0	11.879																								
0.5	11.879																								
1.0	11.879																								
2.0	11.878																								
3.0	11.878																								
4.0	11.878																								
5.0	11.878																								
6.0	11.878																								
7.0	11.878																								
8.0	11.877																								
Object	-12V0.065A																								
1. Graph																									
 <p>[V]</p> <p>Output Voltage</p> <p>Time [H]</p> <p>Input Volt. 48.0V</p> <p>Load 100%</p>			2. Values																						
			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-11.812</td></tr> <tr><td>0.5</td><td>-11.810</td></tr> <tr><td>1.0</td><td>-11.810</td></tr> <tr><td>2.0</td><td>-11.810</td></tr> <tr><td>3.0</td><td>-11.810</td></tr> <tr><td>4.0</td><td>-11.809</td></tr> <tr><td>5.0</td><td>-11.809</td></tr> <tr><td>6.0</td><td>-11.809</td></tr> <tr><td>7.0</td><td>-11.809</td></tr> <tr><td>8.0</td><td>-11.809</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	-11.812	0.5	-11.810	1.0	-11.810	2.0	-11.810	3.0	-11.810	4.0	-11.809	5.0	-11.809	6.0	-11.809	7.0	-11.809	8.0	-11.809
Time since start [H]	Output Voltage [V]																								
0.0	-11.812																								
0.5	-11.810																								
1.0	-11.810																								
2.0	-11.810																								
3.0	-11.810																								
4.0	-11.809																								
5.0	-11.809																								
6.0	-11.809																								
7.0	-11.809																								
8.0	-11.809																								



Model	ZUW1R54812	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 36.0~72.0 V

Load Current (AVR 1) : 0.000~0.065 A

(AVR 2) : 0.000~0.065 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage)/2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 36.0~72.0 V

負荷電流 (AVR 1) 0.000~0.065 A

(AVR 2) 0.000~0.065 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値)/2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Object +12V 0.065 A

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	36.0	0.065	11.892		
Minimum Voltage	55	36.0	0.000	11.597	±148	±1.3

Object -12V 0.065 A

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	48.0	0.065	-11.833		
Minimum Voltage	55	36.0	0.000	-11.533	±150	±1.3



Model	ZUW1R54812		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+12V 0.065A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	11.862	10	15
	2	11.872	10	15
	3	11.866	10	15
Load 100 %	1	11.848	20	25
	2	11.851	20	25
	3	11.851	20	25

Input Volt. 48.0 V



Model	ZUW1R54812		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	-12V 0.065A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	-11.860	10	15
	2	-11.873	10	15
	3	-11.865	10	15
Load 100 %	1	-11.846	20	25
	2	-11.850	20	25
	3	-11.854	20	25

Input Volt. 48.0 V

