



## TEST DATA OF CBS504824 (48V INPUT)

Regulated DC Power Supply  
Feb. 24, 2001

Approved by : Takayuki Fukuda Design Manager  
Takayuki Fukuda

Prepared by : Atsushi Yoshiyama Design Engineer  
Atsushi Yoshiyama

コーワセル株式会社  
**COSEL CO.,LTD.**

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Input Voltage) . . . . .	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current) . . . . .	3
入力電流 (負荷特性)	
4. Input Power (by Load Current) . . . . .	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage) . . . . .	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current) . . . . .	6
効率 (負荷特性)	
7. Load Regulation . . . . .	7
静的負荷変動	
8. Ripple Voltage (by Load Current) . . . . .	8
リップル電圧 (負荷特性)	
9. Ripple-Noise . . . . .	9
リップルノイズ	
10. Overcurrent Protection . . . . .	10
過電流保護	
11. Overvoltage Protection . . . . .	11
過電圧保護	
12. Dynamic Load Response . . . . .	12
動的負荷変動	
13. Rise and Fall Time . . . . .	13
立上り、立下り時間	
14. Ambient Temperature Drift . . . . .	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage . . . . .	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature) . . . . .	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift . . . . .	17
経時ドリフト	
18. Output Voltage Accuracy . . . . .	18
定電圧精度	
19. Condensation . . . . .	19
結露特性	
20. Line Noise Tolerance . . . . .	20
入力雑音耐量	
21. Figure of Testing Circuitry . . . . .	21
測定回路図	

(Final Page 21)

**COSSEL**

Model	CBS504824																																	
Item	Line Regulation 静的の入力変動	Temperature 25°C Testing Circuitry Figure A																																
Object	+24V2.1A																																	
1. Graph																																		
<p>---□--- Load 50%</p> <p>—△— Load 100%</p> <p>Output Voltage [V]</p> <p>Input Voltage [V]</p>																																		
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																		
2. Values																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>24.088</td><td>24.089</td></tr> <tr><td>36</td><td>24.089</td><td>24.089</td></tr> <tr><td>40</td><td>24.089</td><td>24.089</td></tr> <tr><td>48</td><td>24.088</td><td>24.089</td></tr> <tr><td>55</td><td>24.089</td><td>24.089</td></tr> <tr><td>60</td><td>24.088</td><td>24.089</td></tr> <tr><td>70</td><td>24.089</td><td>24.089</td></tr> <tr><td>76</td><td>24.089</td><td>24.089</td></tr> <tr><td>80</td><td>24.089</td><td>24.089</td></tr> </tbody> </table>			Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	33	24.088	24.089	36	24.089	24.089	40	24.089	24.089	48	24.088	24.089	55	24.089	24.089	60	24.088	24.089	70	24.089	24.089	76	24.089	24.089	80	24.089	24.089
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
33	24.088	24.089																																
36	24.089	24.089																																
40	24.089	24.089																																
48	24.088	24.089																																
55	24.089	24.089																																
60	24.088	24.089																																
70	24.089	24.089																																
76	24.089	24.089																																
80	24.089	24.089																																

**COSSEL**

Model	CBS504824																																																																									
Item	Input Current (by Input Voltage) 入力電流 (入力電圧特性)	Temperature Testing Circuitry	25°C Figure A																																																																							
Object																																																																										
1. Graph																																																																										
<p style="text-align: center;"> <span style="margin-right: 10px;">△ — Load 100%</span> <span style="margin-right: 10px;">□ - - - Load 50%</span> <span style="margin-right: 10px;">○ - - - Load 0%</span> </p>																																																																										
Note: Slanted line shows the range of the rated input voltage.																																																																										
(注) 斜線は定格入力電圧範囲を示す。																																																																										
2. Values																																																																										
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>16.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>24.0</td><td>0.008</td><td>0.008</td><td>0.008</td></tr> <tr><td>30.6</td><td>0.061</td><td>0.965</td><td>1.884</td></tr> <tr><td>33.0</td><td>0.058</td><td>0.888</td><td>1.734</td></tr> <tr><td>36.0</td><td>0.055</td><td>0.810</td><td>1.580</td></tr> <tr><td>40.0</td><td>0.052</td><td>0.731</td><td>1.422</td></tr> <tr><td>48.0</td><td>0.047</td><td>0.615</td><td>1.188</td></tr> <tr><td>60.0</td><td>0.041</td><td>0.499</td><td>0.957</td></tr> <tr><td>70.0</td><td>0.035</td><td>0.433</td><td>0.826</td></tr> <tr><td>76.0</td><td>0.033</td><td>0.403</td><td>0.764</td></tr> <tr><td>80.0</td><td>0.032</td><td>0.385</td><td>0.729</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	8.0	0.000	0.000	0.000	16.0	0.000	0.000	0.000	24.0	0.008	0.008	0.008	30.6	0.061	0.965	1.884	33.0	0.058	0.888	1.734	36.0	0.055	0.810	1.580	40.0	0.052	0.731	1.422	48.0	0.047	0.615	1.188	60.0	0.041	0.499	0.957	70.0	0.035	0.433	0.826	76.0	0.033	0.403	0.764	80.0	0.032	0.385	0.729	---	—	—	—	---	—	—	—	---	—	—	—	---	—	—	—
Input Voltage [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
8.0	0.000	0.000	0.000																																																																							
16.0	0.000	0.000	0.000																																																																							
24.0	0.008	0.008	0.008																																																																							
30.6	0.061	0.965	1.884																																																																							
33.0	0.058	0.888	1.734																																																																							
36.0	0.055	0.810	1.580																																																																							
40.0	0.052	0.731	1.422																																																																							
48.0	0.047	0.615	1.188																																																																							
60.0	0.041	0.499	0.957																																																																							
70.0	0.035	0.433	0.826																																																																							
76.0	0.033	0.403	0.764																																																																							
80.0	0.032	0.385	0.729																																																																							
---	—	—	—																																																																							
---	—	—	—																																																																							
---	—	—	—																																																																							
---	—	—	—																																																																							

**COSEL**

Model	CBS504824	Temperature	25°C																																																			
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Testing Circuitry	Figure A																																																			
Object																																																						
1. Graph	<p>—▲— Input Volt. 36V        - - - □- - - Input Volt. 48V        - - ○- - - Input Volt. 76V</p>																																																					
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.055</td><td>0.047</td><td>0.033</td></tr> <tr><td>0.4</td><td>0.343</td><td>0.265</td><td>0.180</td></tr> <tr><td>0.8</td><td>0.629</td><td>0.479</td><td>0.316</td></tr> <tr><td>1.2</td><td>0.917</td><td>0.694</td><td>0.454</td></tr> <tr><td>1.6</td><td>1.209</td><td>0.912</td><td>0.590</td></tr> <tr><td>2.0</td><td>1.504</td><td>1.131</td><td>0.728</td></tr> <tr><td>2.1</td><td>1.578</td><td>1.186</td><td>0.762</td></tr> <tr><td>2.3</td><td>1.727</td><td>1.297</td><td>0.832</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.055	0.047	0.033	0.4	0.343	0.265	0.180	0.8	0.629	0.479	0.316	1.2	0.917	0.694	0.454	1.6	1.209	0.912	0.590	2.0	1.504	1.131	0.728	2.1	1.578	1.186	0.762	2.3	1.727	1.297	0.832	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	0.055	0.047	0.033																																																			
0.4	0.343	0.265	0.180																																																			
0.8	0.629	0.479	0.316																																																			
1.2	0.917	0.694	0.454																																																			
1.6	1.209	0.912	0.590																																																			
2.0	1.504	1.131	0.728																																																			
2.1	1.578	1.186	0.762																																																			
2.3	1.727	1.297	0.832																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	CBS504824																																																						
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Temperature 25°C Testing Circuitry Figure A																																																					
Object	_____																																																						
1. Graph	<p>—△— Input Volt. 36V        - - -□--- Input Volt. 48V        - - ○--- Input Volt. 76V</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Power [W] (36V)</th> <th>Input Power [W] (48V)</th> <th>Input Power [W] (76V)</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0.4</td><td>12.35</td><td>12.71</td><td>13.73</td></tr> <tr><td>0.8</td><td>22.62</td><td>22.99</td><td>24.21</td></tr> <tr><td>1.2</td><td>33.00</td><td>33.26</td><td>34.70</td></tr> <tr><td>1.6</td><td>43.40</td><td>43.70</td><td>45.10</td></tr> <tr><td>2.0</td><td>53.90</td><td>54.20</td><td>55.50</td></tr> <tr><td>2.1</td><td>56.50</td><td>56.80</td><td>58.10</td></tr> <tr><td>2.3</td><td>61.90</td><td>62.10</td><td>63.30</td></tr> </tbody> </table>			Load Current [A]	Input Power [W] (36V)	Input Power [W] (48V)	Input Power [W] (76V)	0.0	0	0	0	0.4	12.35	12.71	13.73	0.8	22.62	22.99	24.21	1.2	33.00	33.26	34.70	1.6	43.40	43.70	45.10	2.0	53.90	54.20	55.50	2.1	56.50	56.80	58.10	2.3	61.90	62.10	63.30																
Load Current [A]	Input Power [W] (36V)	Input Power [W] (48V)	Input Power [W] (76V)																																																				
0.0	0	0	0																																																				
0.4	12.35	12.71	13.73																																																				
0.8	22.62	22.99	24.21																																																				
1.2	33.00	33.26	34.70																																																				
1.6	43.40	43.70	45.10																																																				
2.0	53.90	54.20	55.50																																																				
2.1	56.50	56.80	58.10																																																				
2.3	61.90	62.10	63.30																																																				
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>2.05</td><td>2.19</td><td>2.54</td></tr> <tr><td>0.4</td><td>12.35</td><td>12.71</td><td>13.73</td></tr> <tr><td>0.8</td><td>22.62</td><td>22.99</td><td>24.21</td></tr> <tr><td>1.2</td><td>33.00</td><td>33.26</td><td>34.70</td></tr> <tr><td>1.6</td><td>43.40</td><td>43.70</td><td>45.10</td></tr> <tr><td>2.0</td><td>53.90</td><td>54.20</td><td>55.50</td></tr> <tr><td>2.1</td><td>56.50</td><td>56.80</td><td>58.10</td></tr> <tr><td>2.3</td><td>61.90</td><td>62.10</td><td>63.30</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	2.05	2.19	2.54	0.4	12.35	12.71	13.73	0.8	22.62	22.99	24.21	1.2	33.00	33.26	34.70	1.6	43.40	43.70	45.10	2.0	53.90	54.20	55.50	2.1	56.50	56.80	58.10	2.3	61.90	62.10	63.30	---	-	-	-	---	-	-	-	---	-	-	-
Load Current [A]	Input Power [W]																																																						
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																				
0.0	2.05	2.19	2.54																																																				
0.4	12.35	12.71	13.73																																																				
0.8	22.62	22.99	24.21																																																				
1.2	33.00	33.26	34.70																																																				
1.6	43.40	43.70	45.10																																																				
2.0	53.90	54.20	55.50																																																				
2.1	56.50	56.80	58.10																																																				
2.3	61.90	62.10	63.30																																																				
---	-	-	-																																																				
---	-	-	-																																																				
---	-	-	-																																																				

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	CBS504824	Temperature	25°C																														
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)	Testing Circuitry	Figure A																														
Object	—																																
1. Graph			2. Values																														
<p>The graph plots Efficiency [%] on the y-axis (72 to 100) against Input Voltage [V] on the x-axis (20 to 80). Two data series are shown: Load 50% (dashed line with square markers) and Load 100% (solid line with triangle markers). Both series show a slight decrease in efficiency as input voltage increases. A slanted line on the graph indicates the rated input voltage range.</p> <table border="1"> <thead> <tr> <th>Input Voltage [V]</th> <th>Efficiency Load 50% [%]</th> <th>Efficiency Load 100% [%]</th> </tr> </thead> <tbody> <tr><td>33</td><td>86.6</td><td>89.0</td></tr> <tr><td>36</td><td>87.0</td><td>89.2</td></tr> <tr><td>40</td><td>86.7</td><td>89.2</td></tr> <tr><td>48</td><td>85.8</td><td>88.9</td></tr> <tr><td>55</td><td>85.0</td><td>88.6</td></tr> <tr><td>60</td><td>84.5</td><td>88.2</td></tr> <tr><td>70</td><td>83.2</td><td>87.3</td></tr> <tr><td>76</td><td>82.4</td><td>87.0</td></tr> <tr><td>80</td><td>82.1</td><td>86.7</td></tr> </tbody> </table>				Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]	33	86.6	89.0	36	87.0	89.2	40	86.7	89.2	48	85.8	88.9	55	85.0	88.6	60	84.5	88.2	70	83.2	87.3	76	82.4	87.0	80	82.1	86.7
Input Voltage [V]	Efficiency Load 50% [%]	Efficiency Load 100% [%]																															
33	86.6	89.0																															
36	87.0	89.2																															
40	86.7	89.2																															
48	85.8	88.9																															
55	85.0	88.6																															
60	84.5	88.2																															
70	83.2	87.3																															
76	82.4	87.0																															
80	82.1	86.7																															
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																	

COSEL

Model	CBS504824	Temperature	25°C																																																			
Item	Efficiency (by Load Current) 効率(負荷特性)	Testing Circuitry	Figure A																																																			
Object																																																						
1. Graph	<p>—△— Input Volt. 36V        - - -□- - Input Volt. 48V        - -○- - Input Volt. 76V</p>																																																					
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.4</td><td>78.1</td><td>75.9</td><td>70.3</td></tr> <tr><td>0.8</td><td>85.2</td><td>83.8</td><td>79.6</td></tr> <tr><td>1.2</td><td>87.5</td><td>86.8</td><td>83.3</td></tr> <tr><td>1.6</td><td>88.8</td><td>88.1</td><td>85.4</td></tr> <tr><td>2.0</td><td>89.3</td><td>88.8</td><td>86.7</td></tr> <tr><td>2.1</td><td>89.4</td><td>88.9</td><td>86.9</td></tr> <tr><td>2.3</td><td>89.3</td><td>89.0</td><td>87.4</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	0.4	78.1	75.9	70.3	0.8	85.2	83.8	79.6	1.2	87.5	86.8	83.3	1.6	88.8	88.1	85.4	2.0	89.3	88.8	86.7	2.1	89.4	88.9	86.9	2.3	89.3	89.0	87.4	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	-	-	-																																																			
0.4	78.1	75.9	70.3																																																			
0.8	85.2	83.8	79.6																																																			
1.2	87.5	86.8	83.3																																																			
1.6	88.8	88.1	85.4																																																			
2.0	89.3	88.8	86.7																																																			
2.1	89.4	88.9	86.9																																																			
2.3	89.3	89.0	87.4																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	CBS504824	Temperature	25°C																																													
Item	Load Regulation 靜的負荷変動	Testing Circuitry	Figure A																																													
Object	+24V2.1A																																															
1. Graph		<p>—△— Input Volt. 36V        - - -□- - Input Volt. 48V        - - ○- - Input Volt. 76V</p>																																														
<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr> <td>0.0</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>0.4</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>0.8</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>1.2</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>1.6</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>2.0</td> <td>24.090</td> <td>24.090</td> <td>24.091</td> </tr> <tr> <td>2.1</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>2.3</td> <td>24.090</td> <td>24.090</td> <td>24.090</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> <td>-</td> </tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	24.090	24.090	24.090	0.4	24.090	24.090	24.090	0.8	24.090	24.090	24.090	1.2	24.090	24.090	24.090	1.6	24.090	24.090	24.090	2.0	24.090	24.090	24.091	2.1	24.090	24.090	24.090	2.3	24.090	24.090	24.090	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																															
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																													
0.0	24.090	24.090	24.090																																													
0.4	24.090	24.090	24.090																																													
0.8	24.090	24.090	24.090																																													
1.2	24.090	24.090	24.090																																													
1.6	24.090	24.090	24.090																																													
2.0	24.090	24.090	24.091																																													
2.1	24.090	24.090	24.090																																													
2.3	24.090	24.090	24.090																																													
--	-	-	-																																													
--	-	-	-																																													

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSSEL**

Model	CBS504824																																							
Item	Ripple Voltage (by Load Current) リップル電圧（負荷特性）	Temperature 25°C Testing Circuitry Figure A																																						
Object	+24V2.1A																																							
1. Graph																																								
<p>Y-axis: Ripple Voltage [mV] (0 to 50) X-axis: Load Current [A] (0.0 to 3.0)</p>																																								
2. Values																																								
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Output Voltage [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>0.4</td><td>10</td><td>15</td></tr> <tr><td>0.8</td><td>10</td><td>15</td></tr> <tr><td>1.3</td><td>10</td><td>15</td></tr> <tr><td>1.7</td><td>10</td><td>15</td></tr> <tr><td>2.1</td><td>10</td><td>15</td></tr> <tr><td>2.5</td><td>10</td><td>15</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>			Load Current [A]	Ripple Output Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	5	5	0.4	10	15	0.8	10	15	1.3	10	15	1.7	10	15	2.1	10	15	2.5	10	15	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple Output Voltage [mV]																																							
	Input Volt. 36 [V]	Input Volt. 76 [V]																																						
0.0	5	5																																						
0.4	10	15																																						
0.8	10	15																																						
1.3	10	15																																						
1.7	10	15																																						
2.1	10	15																																						
2.5	10	15																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図p-p値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p>																																								
<p>Ripple [mVp-p]</p>																																								
<p>Fig. Complex Ripple Wave Form 図 リップル波形図</p>																																								


COSEL

Model	CBS504824	Temperature	25°C																																						
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A																																						
Object	+24V2.1A																																								
1. Graph			2. Values																																						
			<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>10</td></tr> <tr><td>0.4</td><td>10</td><td>20</td></tr> <tr><td>0.8</td><td>10</td><td>20</td></tr> <tr><td>1.3</td><td>10</td><td>20</td></tr> <tr><td>1.7</td><td>10</td><td>20</td></tr> <tr><td>2.1</td><td>10</td><td>20</td></tr> <tr><td>2.5</td><td>10</td><td>20</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> <tr><td>---</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	5	10	0.4	10	20	0.8	10	20	1.3	10	20	1.7	10	20	2.1	10	20	2.5	10	20	---	—	—	---	—	—	---	—	—	---	—	—
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.0	5	10																																							
0.4	10	20																																							
0.8	10	20																																							
1.3	10	20																																							
1.7	10	20																																							
2.1	10	20																																							
2.5	10	20																																							
---	—	—																																							
---	—	—																																							
---	—	—																																							
---	—	—																																							
<p>Ripple-Noise is shown as p-p in the figure below.      Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。      (注) 斜線は定格負荷電流範囲を示す。</p>																																									
<p>Fig. Complex Ripple Noise Wave Form      図 リップルノイズ波形</p>																																									

**COSEL**

Product Information	
Model	CBS504824
Item	Overcurrent Protection 過電流保護
Object	+24V2.1A

Temperature 25°C  
Testing Circuitry Figure A

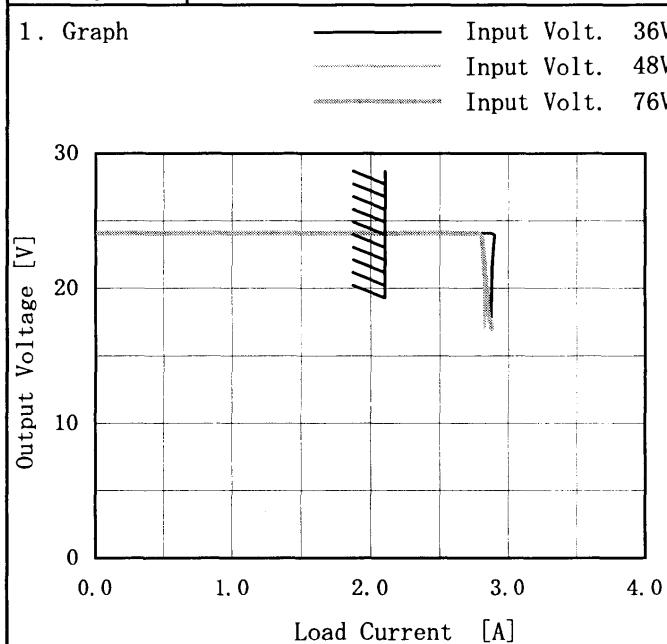

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Intermittent operation occurs when the output voltage is from 17V to 0V.  
17V～0V間は、間欠モードとなる。

**COSEL**

Model Item Object	CBS504824	Testing Circuitry      Figure A			
	Overvoltage Protection 過電圧保護				
	+24V2.1A				
1. Graph	<p>—▲— Input Volt. 36V      - - - □ - - Input Volt. 48V      - - ○ - - Input Volt. 76V</p> <p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p>	2. Values			
		Ambient Temperature [°C]	Operating Point [V]		
		[°C]	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
	-50	31.29	31.29	31.29	
	-40	31.28	31.29	31.29	
	-20	31.36	31.36	31.36	
	0	31.36	31.36	31.36	
	25	31.43	31.43	31.43	
	40	31.43	31.43	31.43	
	60	31.43	31.43	31.43	
	85	31.35	31.35	31.35	
	100	31.35	31.35	31.35	
	105	31.35	31.35	31.35	
	--	-	-	-	

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

**CSEL**

Model CBS504824

Item Dynamic Load Response  
動的負荷變動

Object +24V2.1A

Temperature 25°C  
Testing Circuitry Figure A

Input Volt. 48 V


Cycle 1000 ms

Load Current





Min. Load (0A) ↔

Load 100% (2.1A)

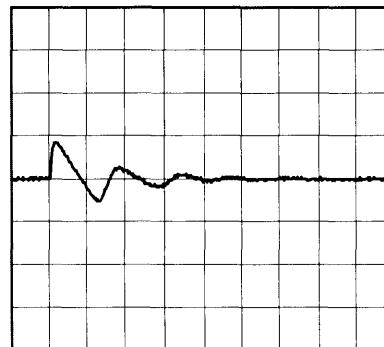



Min. Load (0A) ↔

Load 50% (1.05A)

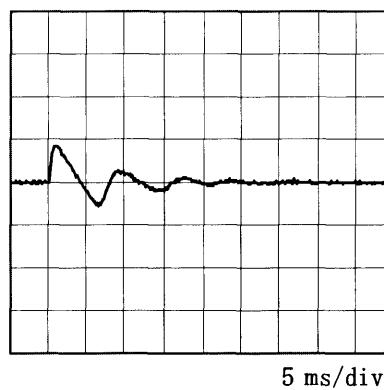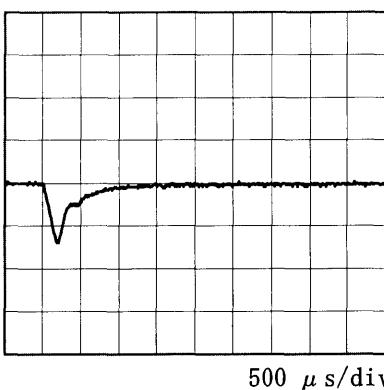

Load 10% (0.21A) ↔

Load 100% (2.1A)

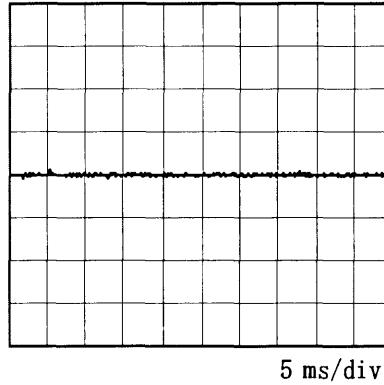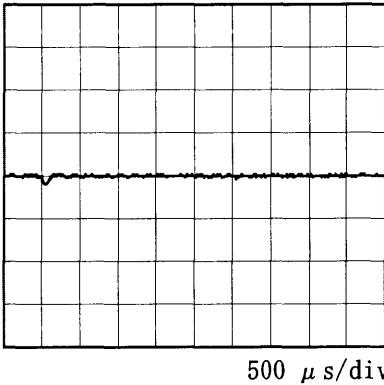

COSEL


Model CBS504824

Item Rise and Fall Time  
立上り、立下り時間

Object +24V2.1A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

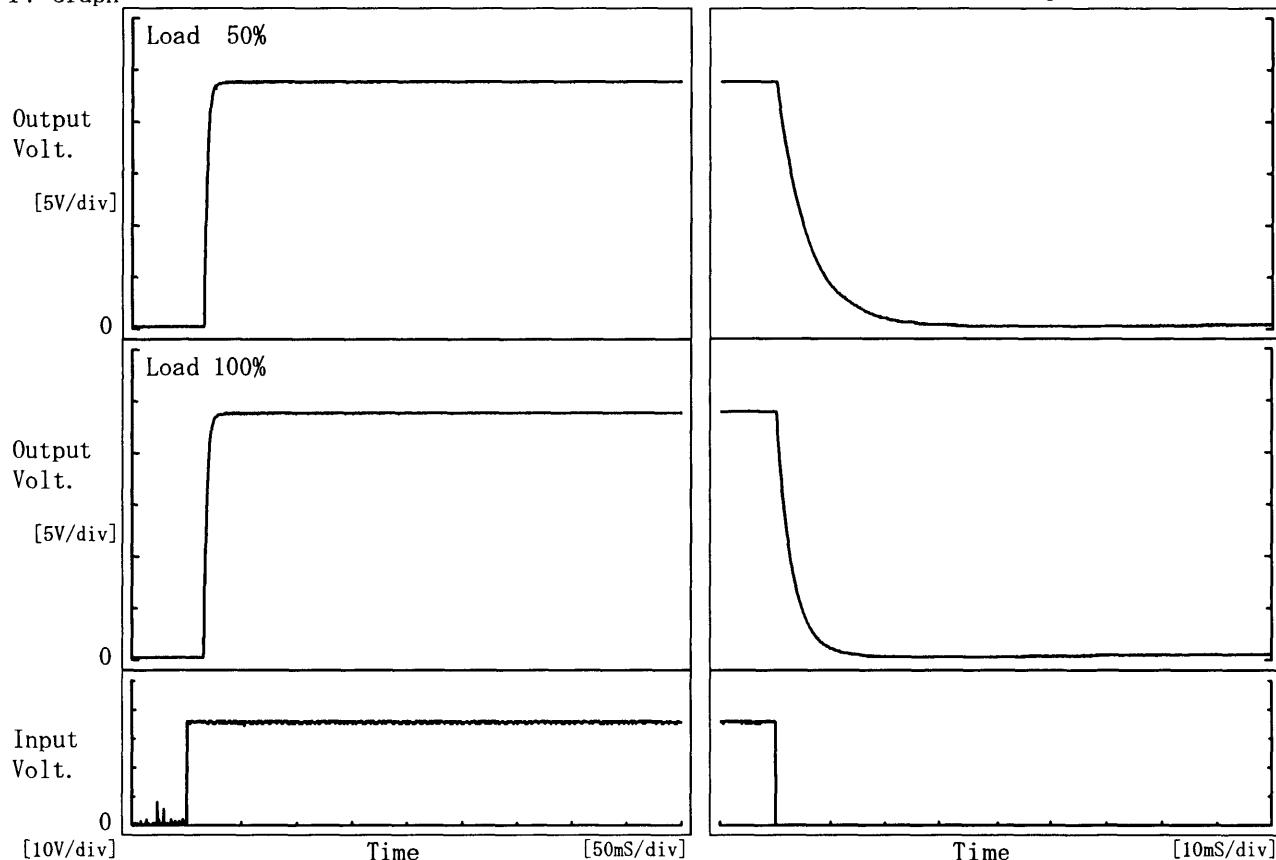


## 2. Values

Load	Time	T <sub>d</sub>	T <sub>r</sub>	T <sub>s</sub>	T <sub>h</sub>	T <sub>f</sub>	[mS]
50 %		15.3	6.3	21.5	0.6	12.9	
100 %		15.3	6.3	21.5	0.4	6.4	

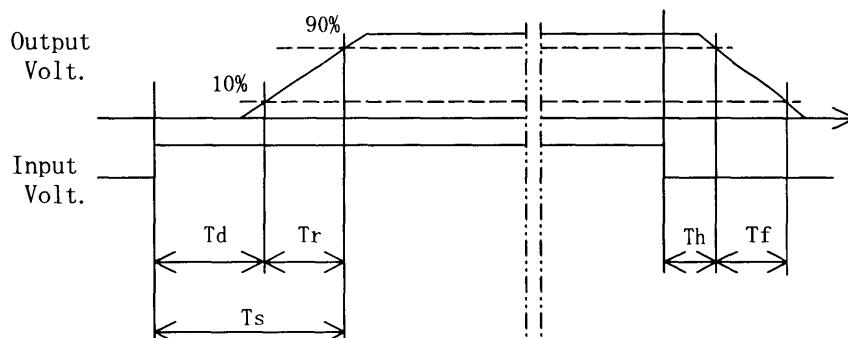

**COSEL**

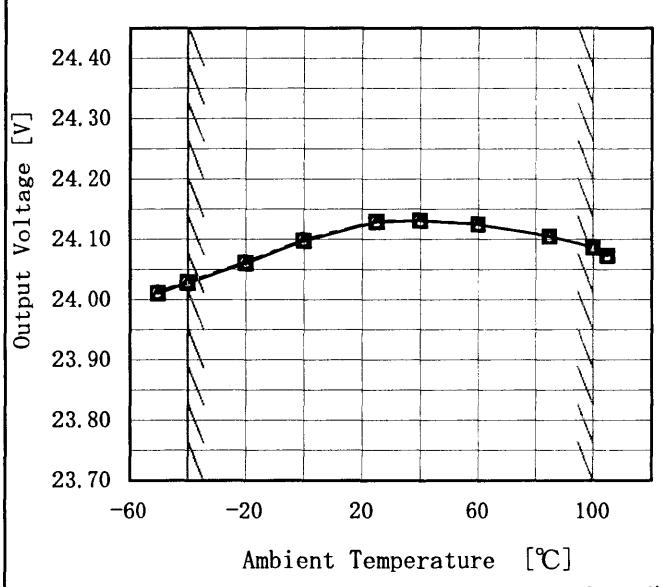Model	CBS504824																																																					
	Ambient Temperature Drift 周囲温度変動	Testing Circuitry      Figure A																																																				
	Object      +24V2.1A																																																					
1. Graph	<p>—△— Input Volt. 36V      - - -□- - Input Volt. 48V      - - ○- - Input Volt. 76V</p>  <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>	2. Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td><td>24.010</td><td>24.011</td><td>24.012</td> </tr> <tr> <td>-40</td><td>24.028</td><td>24.029</td><td>24.030</td> </tr> <tr> <td>-20</td><td>24.060</td><td>24.061</td><td>24.062</td> </tr> <tr> <td>0</td><td>24.097</td><td>24.098</td><td>24.099</td> </tr> <tr> <td>25</td><td>24.129</td><td>24.130</td><td>24.130</td> </tr> <tr> <td>40</td><td>24.131</td><td>24.131</td><td>24.131</td> </tr> <tr> <td>60</td><td>24.125</td><td>24.125</td><td>24.125</td> </tr> <tr> <td>85</td><td>24.105</td><td>24.105</td><td>24.105</td> </tr> <tr> <td>100</td><td>24.087</td><td>24.087</td><td>24.087</td> </tr> <tr> <td>105</td><td>24.073</td><td>24.073</td><td>24.073</td> </tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td> </tr> </tbody> </table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	-50	24.010	24.011	24.012	-40	24.028	24.029	24.030	-20	24.060	24.061	24.062	0	24.097	24.098	24.099	25	24.129	24.130	24.130	40	24.131	24.131	24.131	60	24.125	24.125	24.125	85	24.105	24.105	24.105	100	24.087	24.087	24.087	105	24.073	24.073	24.073	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
-50	24.010	24.011	24.012																																																			
-40	24.028	24.029	24.030																																																			
-20	24.060	24.061	24.062																																																			
0	24.097	24.098	24.099																																																			
25	24.129	24.130	24.130																																																			
40	24.131	24.131	24.131																																																			
60	24.125	24.125	24.125																																																			
85	24.105	24.105	24.105																																																			
100	24.087	24.087	24.087																																																			
105	24.073	24.073	24.073																																																			
--	-	-	-																																																			

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

**COSEL**


Model	CBS504824																																								
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	Testing Circuitry	Figure A																																						
Object	+24V2.1A																																								
1. Graph		2. Values																																							
		<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th><th colspan="2">Input Voltage [V]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> </thead> <tbody> <tr><td>-50</td><td>27.8</td><td>27.9</td></tr> <tr><td>-40</td><td>27.8</td><td>27.9</td></tr> <tr><td>-20</td><td>27.8</td><td>27.9</td></tr> <tr><td>0</td><td>27.9</td><td>27.9</td></tr> <tr><td>25</td><td>27.9</td><td>27.7</td></tr> <tr><td>40</td><td>27.7</td><td>27.9</td></tr> <tr><td>60</td><td>27.7</td><td>27.9</td></tr> <tr><td>85</td><td>27.5</td><td>27.9</td></tr> <tr><td>100</td><td>27.3</td><td>27.9</td></tr> <tr><td>105</td><td>27.3</td><td>27.9</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-50	27.8	27.9	-40	27.8	27.9	-20	27.8	27.9	0	27.9	27.9	25	27.9	27.7	40	27.7	27.9	60	27.7	27.9	85	27.5	27.9	100	27.3	27.9	105	27.3	27.9	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																								
	Load 50%	Load 100%																																							
-50	27.8	27.9																																							
-40	27.8	27.9																																							
-20	27.8	27.9																																							
0	27.9	27.9																																							
25	27.9	27.7																																							
40	27.7	27.9																																							
60	27.7	27.9																																							
85	27.5	27.9																																							
100	27.3	27.9																																							
105	27.3	27.9																																							
--	-	-																																							
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																									

**COSEL**

Model	CBS504824
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+24V2.1A

Testing Circuitry Figure A

## 1. Graph

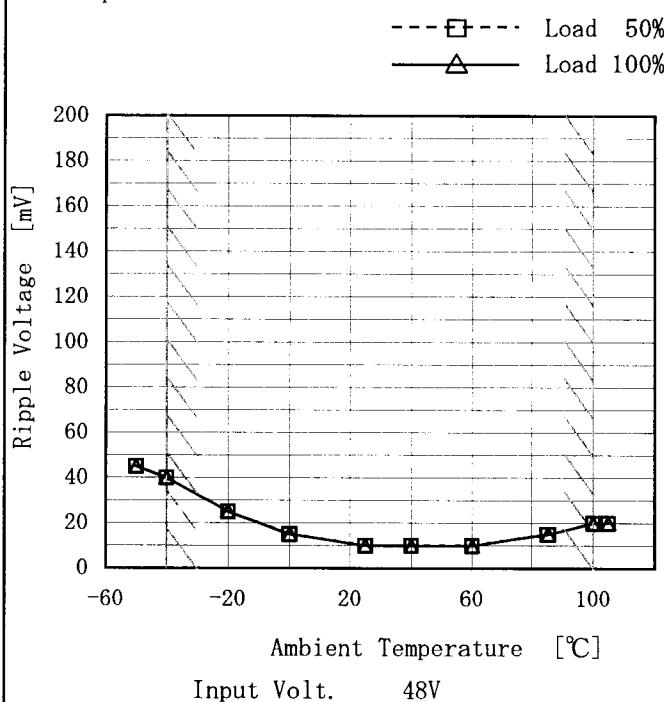


## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	45	45
-40	40	40
-20	25	25
0	15	15
25	10	10
40	10	10
60	10	10
85	15	15
100	20	20
105	20	20
--	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

**COSEL**

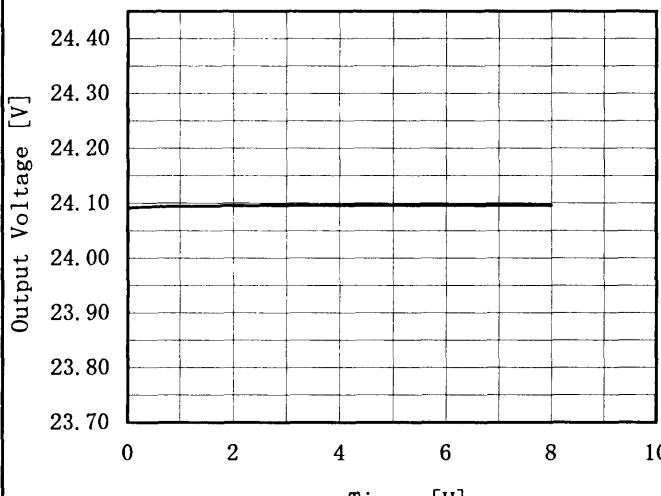Model	CBS504824	Temperature	25°C																							
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																							
Object	+24V2.1A																									
1. Graph																										
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 48V Load 100%</p>			2. Values																							
<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>24.091</td></tr> <tr><td>0.5</td><td>24.094</td></tr> <tr><td>1.0</td><td>24.095</td></tr> <tr><td>2.0</td><td>24.095</td></tr> <tr><td>3.0</td><td>24.096</td></tr> <tr><td>4.0</td><td>24.096</td></tr> <tr><td>5.0</td><td>24.096</td></tr> <tr><td>6.0</td><td>24.096</td></tr> <tr><td>7.0</td><td>24.096</td></tr> <tr><td>8.0</td><td>24.096</td></tr> </tbody> </table>			Time since start [H]	Output Voltage [V]	0.0	24.091	0.5	24.094	1.0	24.095	2.0	24.095	3.0	24.096	4.0	24.096	5.0	24.096	6.0	24.096	7.0	24.096	8.0	24.096		
Time since start [H]	Output Voltage [V]																									
0.0	24.091																									
0.5	24.094																									
1.0	24.095																									
2.0	24.095																									
3.0	24.096																									
4.0	24.096																									
5.0	24.096																									
6.0	24.096																									
7.0	24.096																									
8.0	24.096																									



Model	CBS504824	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+24V2.1A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 36 ~ 76V

Load Current : 0 ~ 2.1A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 36 ~ 76V

負荷電流 : 0 ~ 2.1A

\* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	36	2.1	24.128	±48	±0.2
Minimum Voltage	-40	36	0	24.032		



Model	CBS504824	Testing Circuitry Figure A
Item	Condense 結露特性	
Object	+24V2.1A	

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

### 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	24.094	Input Volt.:48V, Load Current.:2.1A
Line Regulation [mV]	1	Input Volt.:36~76V, Load Current.:2.1A
Load Regulation [mV]	1	Input Volt.:48V, Load Current.:0~2.1A



Model	CBS504824	Temperature Testing Circuitry	25°C Figure B	
Item	Line Noise Tolerance 入力雑音耐量			
Object	+24V2.1A			

## 1. Conditions

- Input Voltage : 48 V
- Pulse Input Duration : 1 min. or more
- Pulse Voltage : 2000 V
- Load : 100 %
- Pulse Cycle : 16.7 ms

## 2. Results

Pulse Width [ns]	MODE	No protection failure should occur		DC-like Regulation of Output Voltage 出力電圧の直流的変動
		POLARITY	保護回路の誤動作がない	
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

COSEL

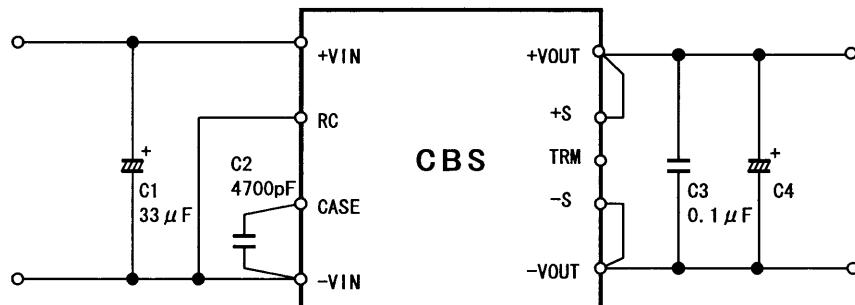
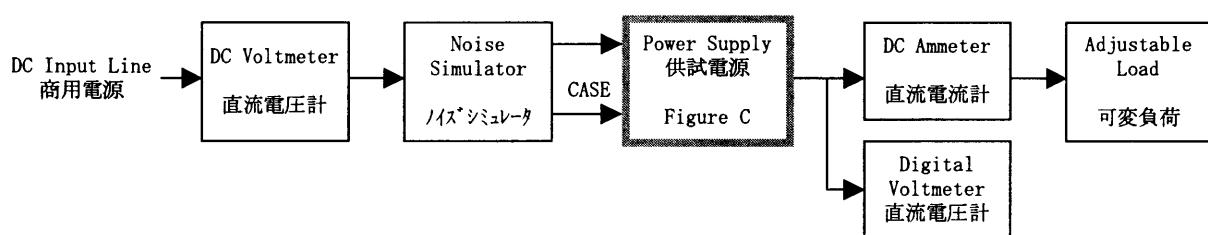
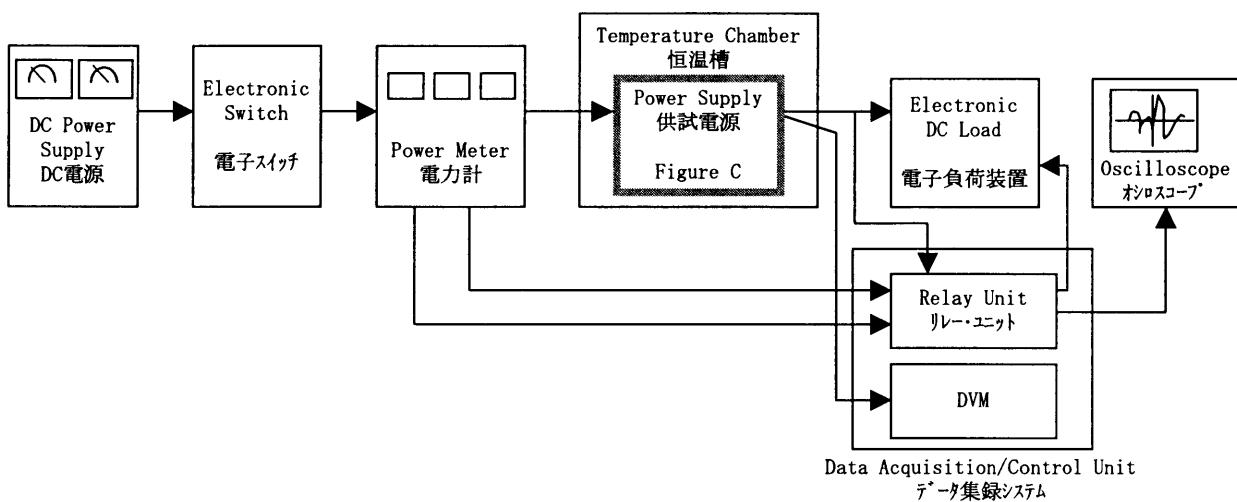


Figure C

C1 : 100V 33  $\mu$ F

C2 : 4700pF

C3 : 50V 0.1  $\mu$ F(-40°C ≤ T<sub>B</sub> ≤ -20°C)

C4 : CBS504803, 05	10V 2200 $\mu$ F × 2
CBS504812, 15	35V 470 $\mu$ F × 2
CBS504824, 28	35V 220 $\mu$ F × 2

(-20°C < T<sub>B</sub> ≤ 100°C)

C4 : CBS504803, 05	10V 2200 $\mu$ F
CBS504812, 15	35V 470 $\mu$ F
CBS504824, 28	35V 220 $\mu$ F

T<sub>B</sub>:Base Plate Temp.