

COSEL

TEST DATA OF DBS200B03

(280V INPUT)

Regulated DC Power Supply

Date : Apr. 16. 1999

Approved by :

K. Shimano

Design Manager

Prepared by :

K. Mizui

Design Engineer

コーワセル株式会社

COSEL CO., LTD.



CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Input Voltage)	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current)	3
入力電流 (負荷特性)	
4. Input Power (by Load Current)	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage)	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current)	6
効率 (負荷特性)	
7. Load Regulation	7
静的負荷変動	
8. Ripple Voltage (by Load Current)	8
リップル電圧 (負荷特性)	
9. Ripple-Noise	9
リップルノイズ	
10. Overcurrent Protection	10
過電流保護	
11. Ovvervoltage Protection	11
過電圧保護	
12. Dynamic Load Responce	12
動的負荷変動	
13. Rise and Fall Time	13
立上り、立下り時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Condensation	19
結露特性	
20. Line Noise Tolerance	20
入力雑音耐量	
21. Figure of Testing Circuitry	21
測定回路図	

(Final Page 22)

COSEL

Model	DBS200B03	Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																		
Object	+3.3V50A																																		
1. Graph		-----□----- Load 50% -----△----- Load 100%																																	
		2. Values																																	
		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>170</td><td>3.317</td><td>3.316</td></tr> <tr><td>180</td><td>3.317</td><td>3.316</td></tr> <tr><td>200</td><td>3.317</td><td>3.316</td></tr> <tr><td>250</td><td>3.317</td><td>3.316</td></tr> <tr><td>280</td><td>3.317</td><td>3.316</td></tr> <tr><td>300</td><td>3.317</td><td>3.316</td></tr> <tr><td>350</td><td>3.317</td><td>3.316</td></tr> <tr><td>400</td><td>3.317</td><td>3.316</td></tr> <tr><td>420</td><td>3.317</td><td>3.316</td></tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	170	3.317	3.316	180	3.317	3.316	200	3.317	3.316	250	3.317	3.316	280	3.317	3.316	300	3.317	3.316	350	3.317	3.316	400	3.317	3.316	420	3.317	3.316
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
170	3.317	3.316																																	
180	3.317	3.316																																	
200	3.317	3.316																																	
250	3.317	3.316																																	
280	3.317	3.316																																	
300	3.317	3.316																																	
350	3.317	3.316																																	
400	3.317	3.316																																	
420	3.317	3.316																																	

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	DBS200B03	Temperature	25°C																																																																							
Item	Input Current (by Input Voltage) 入力電流 (入力電圧特性)	Testing Circuitry	Figure A																																																																							
Object	<hr/>																																																																									
1. Graph	<p>[A]</p>																																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Volt. [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>50</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>100</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>150</td><td>0.003</td><td>0.003</td><td>0.002</td></tr> <tr><td>165</td><td>0.013</td><td>0.593</td><td>1.168</td></tr> <tr><td>170</td><td>0.012</td><td>0.574</td><td>1.133</td></tr> <tr><td>180</td><td>0.012</td><td>0.542</td><td>1.069</td></tr> <tr><td>200</td><td>0.011</td><td>0.488</td><td>0.960</td></tr> <tr><td>250</td><td>0.011</td><td>0.394</td><td>0.766</td></tr> <tr><td>280</td><td>0.010</td><td>0.354</td><td>0.684</td></tr> <tr><td>300</td><td>0.010</td><td>0.331</td><td>0.639</td></tr> <tr><td>350</td><td>0.010</td><td>0.288</td><td>0.550</td></tr> <tr><td>400</td><td>0.010</td><td>0.254</td><td>0.484</td></tr> <tr><td>420</td><td>0.010</td><td>0.244</td><td>0.462</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Input Volt. [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	50	0.000	0.000	0.000	100	0.000	0.000	0.000	150	0.003	0.003	0.002	165	0.013	0.593	1.168	170	0.012	0.574	1.133	180	0.012	0.542	1.069	200	0.011	0.488	0.960	250	0.011	0.394	0.766	280	0.010	0.354	0.684	300	0.010	0.331	0.639	350	0.010	0.288	0.550	400	0.010	0.254	0.484	420	0.010	0.244	0.462	—	—	—	—	—	—	—	—
Input Volt. [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
0	0.000	0.000	0.000																																																																							
50	0.000	0.000	0.000																																																																							
100	0.000	0.000	0.000																																																																							
150	0.003	0.003	0.002																																																																							
165	0.013	0.593	1.168																																																																							
170	0.012	0.574	1.133																																																																							
180	0.012	0.542	1.069																																																																							
200	0.011	0.488	0.960																																																																							
250	0.011	0.394	0.766																																																																							
280	0.010	0.354	0.684																																																																							
300	0.010	0.331	0.639																																																																							
350	0.010	0.288	0.550																																																																							
400	0.010	0.254	0.484																																																																							
420	0.010	0.244	0.462																																																																							
—	—	—	—																																																																							
—	—	—	—																																																																							

COSEL

Model	DBS200B03	Temperature Testing Circuitry	25°C Figure A																																																				
Item	Input Current (by Load Current) 入力電流 (負荷特性)																																																						
Object	—	2. Values																																																					
1. Graph																																																							
<p>Legend:</p> <ul style="list-style-type: none"> △ Input Volt. 200V □ Input Volt. 280V ○ Input Volt. 400V <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.01</td><td>0.01</td><td>0.01</td></tr> <tr><td>8</td><td>0.17</td><td>0.13</td><td>0.10</td></tr> <tr><td>16</td><td>0.33</td><td>0.24</td><td>0.17</td></tr> <tr><td>24</td><td>0.49</td><td>0.35</td><td>0.25</td></tr> <tr><td>32</td><td>0.65</td><td>0.47</td><td>0.33</td></tr> <tr><td>40</td><td>0.82</td><td>0.59</td><td>0.42</td></tr> <tr><td>48</td><td>1.00</td><td>0.71</td><td>0.50</td></tr> <tr><td>50</td><td>1.05</td><td>0.75</td><td>0.53</td></tr> <tr><td>55</td><td>1.16</td><td>0.83</td><td>0.58</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 200[V]		Input Volt. 280[V]	Input Volt. 400[V]	0	0.01	0.01	0.01	8	0.17	0.13	0.10	16	0.33	0.24	0.17	24	0.49	0.35	0.25	32	0.65	0.47	0.33	40	0.82	0.59	0.42	48	1.00	0.71	0.50	50	1.05	0.75	0.53	55	1.16	0.83	0.58	—	—	—	—	—	—	—	—	—	—	—	—		
Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																				
0	0.01	0.01	0.01																																																				
8	0.17	0.13	0.10																																																				
16	0.33	0.24	0.17																																																				
24	0.49	0.35	0.25																																																				
32	0.65	0.47	0.33																																																				
40	0.82	0.59	0.42																																																				
48	1.00	0.71	0.50																																																				
50	1.05	0.75	0.53																																																				
55	1.16	0.83	0.58																																																				
—	—	—	—																																																				
—	—	—	—																																																				
—	—	—	—																																																				

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	DBS200B03	Temperature	25°C																																																				
Item	Input Power (by Load Current) 入力電力(負荷特性)	Humidity	40%RH																																																				
Object	_____	Testing Circuitry	Figure A																																																				
1. Graph		2. Values																																																					
<p>The graph plots Input Power [W] on the Y-axis (0 to 500) against Load Current [A] on the X-axis (0 to 60). Three data series are shown for Input Volt. 200V (triangles), Input Volt. 280V (squares), and Input Volt. 400V (circles). All series show a linear increase. A slanted line is drawn through the origin, representing the rated load current range.</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>0</td><td>2</td><td>3</td><td>4</td></tr> <tr><td>8</td><td>34</td><td>36</td><td>39</td></tr> <tr><td>16</td><td>65</td><td>67</td><td>70</td></tr> <tr><td>24</td><td>97</td><td>98</td><td>101</td></tr> <tr><td>32</td><td>131</td><td>131</td><td>134</td></tr> <tr><td>40</td><td>165</td><td>165</td><td>167</td></tr> <tr><td>48</td><td>200</td><td>200</td><td>201</td></tr> <tr><td>50</td><td>210</td><td>209</td><td>210</td></tr> <tr><td>55</td><td>233</td><td>231</td><td>232</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0	2	3	4	8	34	36	39	16	65	67	70	24	97	98	101	32	131	131	134	40	165	165	167	48	200	200	201	50	210	209	210	55	233	231	232	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																				
0	2	3	4																																																				
8	34	36	39																																																				
16	65	67	70																																																				
24	97	98	101																																																				
32	131	131	134																																																				
40	165	165	167																																																				
48	200	200	201																																																				
50	210	209	210																																																				
55	233	231	232																																																				
—	—	—	—																																																				
—	—	—	—																																																				
—	—	—	—																																																				

Load Current [A]	Input Power [W]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
0	2	3	4
8	34	36	39
16	65	67	70
24	97	98	101
32	131	131	134
40	165	165	167
48	200	200	201
50	210	209	210
55	233	231	232
—	—	—	—
—	—	—	—
—	—	—	—

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

COSEL

Model	DBS200B03	Temperature Testing Circuitry	25°C Figure A																																
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)																																		
Object	<hr/>																																		
1. Graph																																			
			2. Values																																
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>170</td><td>82.1</td><td>78.9</td> </tr> <tr> <td>180</td><td>82.3</td><td>79.0</td> </tr> <tr> <td>200</td><td>82.1</td><td>79.2</td> </tr> <tr> <td>250</td><td>81.6</td><td>79.6</td> </tr> <tr> <td>280</td><td>81.3</td><td>79.6</td> </tr> <tr> <td>300</td><td>81.0</td><td>79.6</td> </tr> <tr> <td>350</td><td>80.2</td><td>79.6</td> </tr> <tr> <td>400</td><td>79.4</td><td>79.2</td> </tr> <tr> <td>420</td><td>79.0</td><td>79.2</td> </tr> </tbody> </table>				Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	170	82.1	78.9	180	82.3	79.0	200	82.1	79.2	250	81.6	79.6	280	81.3	79.6	300	81.0	79.6	350	80.2	79.6	400	79.4	79.2	420	79.0	79.2
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
170	82.1	78.9																																	
180	82.3	79.0																																	
200	82.1	79.2																																	
250	81.6	79.6																																	
280	81.3	79.6																																	
300	81.0	79.6																																	
350	80.2	79.6																																	
400	79.4	79.2																																	
420	79.0	79.2																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																			

COSEL

Model	DBS200B03																																																									
Item	Efficiency (by Load Current) 効率(負荷特性)	Temperature Testing Circuitry	25°C Figure A																																																							
Object	<hr/>																																																									
1. Graph	<p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Legend: △ Input Volt. 200V, □ Input Volt. 280V, ○ Input Volt. 400V</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr><td>8</td><td>77.3</td><td>75.0</td><td>69.3</td></tr> <tr><td>16</td><td>81.3</td><td>80.0</td><td>76.6</td></tr> <tr><td>24</td><td>82.0</td><td>81.2</td><td>79.1</td></tr> <tr><td>32</td><td>81.7</td><td>81.2</td><td>80.0</td></tr> <tr><td>40</td><td>80.7</td><td>80.6</td><td>80.0</td></tr> <tr><td>48</td><td>79.7</td><td>80.0</td><td>79.4</td></tr> <tr><td>50</td><td>79.3</td><td>79.7</td><td>79.4</td></tr> <tr><td>55</td><td>79.1</td><td>79.5</td><td>79.3</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	8	77.3	75.0	69.3	16	81.3	80.0	76.6	24	82.0	81.2	79.1	32	81.7	81.2	80.0	40	80.7	80.6	80.0	48	79.7	80.0	79.4	50	79.3	79.7	79.4	55	79.1	79.5	79.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																									
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																																							
8	77.3	75.0	69.3																																																							
16	81.3	80.0	76.6																																																							
24	82.0	81.2	79.1																																																							
32	81.7	81.2	80.0																																																							
40	80.7	80.6	80.0																																																							
48	79.7	80.0	79.4																																																							
50	79.3	79.7	79.4																																																							
55	79.1	79.5	79.3																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note:	Slanted line shows the range of the rated load current																																																									
(注)	斜線は定格負荷電流範囲を示す。																																																									


COSEL

Model	DBS200B03	Temperature	25°C																																															
Item	Load Regulation 靜的負荷変動	Testing Circuitry	Figure A																																															
Object	+3.3V50A																																																	
1. Graph	<p>Input Volt. 200V Input Volt. 280V Input Volt. 400V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>																																																	
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 280[V]</th> <th>Input Volt. 400[V]</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>3.323</td> <td>3.323</td> <td>3.323</td> </tr> <tr> <td>8</td> <td>3.323</td> <td>3.323</td> <td>3.322</td> </tr> <tr> <td>16</td> <td>3.322</td> <td>3.322</td> <td>3.322</td> </tr> <tr> <td>24</td> <td>3.322</td> <td>3.322</td> <td>3.322</td> </tr> <tr> <td>32</td> <td>3.322</td> <td>3.322</td> <td>3.322</td> </tr> <tr> <td>40</td> <td>3.322</td> <td>3.321</td> <td>3.321</td> </tr> <tr> <td>48</td> <td>3.321</td> <td>3.321</td> <td>3.321</td> </tr> <tr> <td>50</td> <td>3.321</td> <td>3.321</td> <td>3.321</td> </tr> <tr> <td>55</td> <td>3.321</td> <td>3.321</td> <td>3.320</td> </tr> <tr> <td>—</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	0	3.323	3.323	3.323	8	3.323	3.323	3.322	16	3.322	3.322	3.322	24	3.322	3.322	3.322	32	3.322	3.322	3.322	40	3.322	3.321	3.321	48	3.321	3.321	3.321	50	3.321	3.321	3.321	55	3.321	3.321	3.320	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]																																															
0	3.323	3.323	3.323																																															
8	3.323	3.323	3.322																																															
16	3.322	3.322	3.322																																															
24	3.322	3.322	3.322																																															
32	3.322	3.322	3.322																																															
40	3.322	3.321	3.321																																															
48	3.321	3.321	3.321																																															
50	3.321	3.321	3.321																																															
55	3.321	3.321	3.320																																															
—	—	—	—																																															
Note:	Slanted line shows the range of the rated load current.																																																	
(注)	斜線は定格負荷電流範囲を示す。																																																	

COSEL

Model	DBS200B03
Item	Ripple Voltage (by Load Current) リップル電圧(負荷特性)

Object	+3.3V 50A
--------	-----------

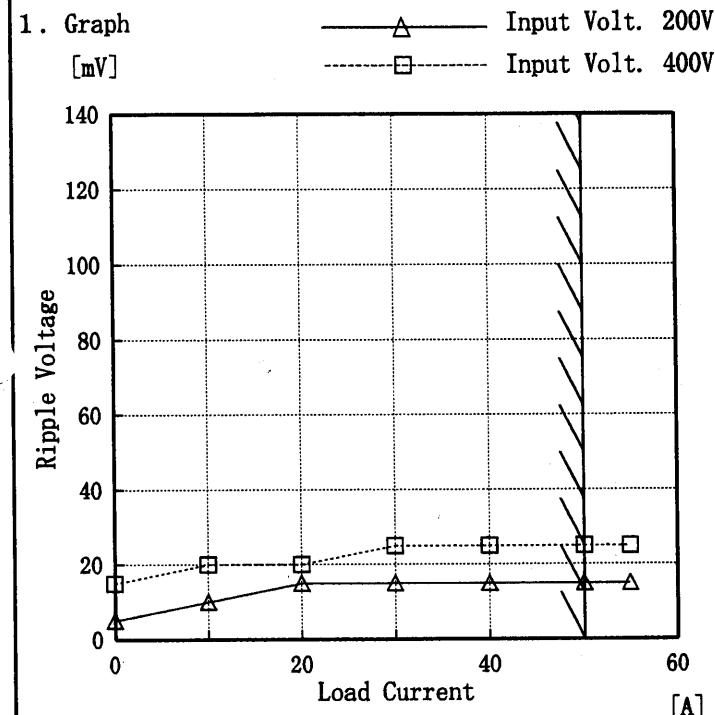

Temperature 25°C
Testing Circuitry Figure A

2. Values

Load Current [A]	Ripple Output Volt. [mV]	
	Input Volt. 200 [V]	Input Volt. 400 [V]
0	5	15
10	10	20
20	15	20
30	15	25
40	15	25
50	15	25
55	15	25
—	—	—
—	—	—
—	—	—
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。


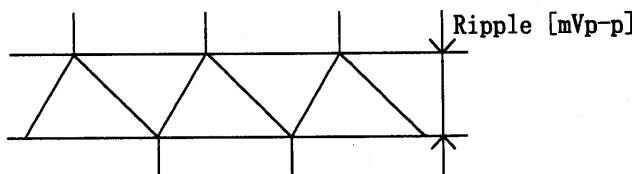


図 リップル波形図

COSEL

Model	DBS200B03
Item	Ripple-Noise リップルノイズ
Object	+3.3V 50A

Temperature 25°C
Testing Circuitry Figure A

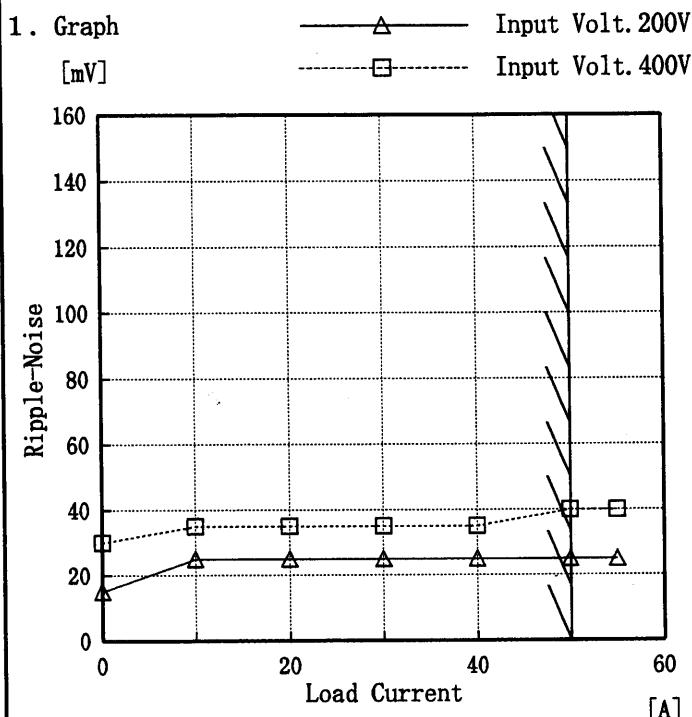

2. Values

Load current [A]	Ripple-Noise [mV]	
	Input Volt. 200 [V]	Input Volt. 400 [V]
0	15	30
10	25	35
20	25	35
30	25	35
40	25	35
50	25	40
55	25	40
-	-	-
-	-	-
-	-	-
-	-	-

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

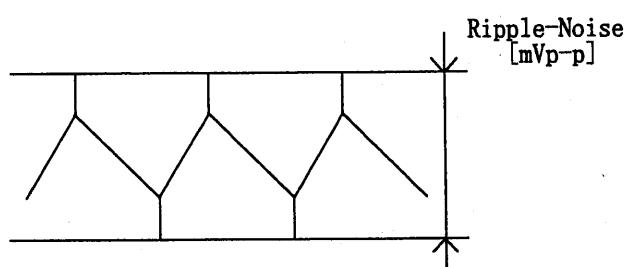



図 リップルノイズ波形図

COSEL

Model	DBS200B03	Temperature 25°C Testing Circuitry Figure A		
Item	Overcurrent Protection 過電流保護			
Object	+3.3V50A			
1. Graph	<p>[V]</p> <p>Input Volt. 200 V Input Volt. 280 V Input Volt. 400 V</p>			
2. Values				
Output Voltage [V]	Load Current [A]			
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]	
3.30	66.72	67.88	69.52	
3.13	67.52	68.17	69.96	
2.97	67.82	68.47	70.58	
2.64	68.55	69.30	71.50	
2.31	69.34	70.27	72.21	
1.98	70.19	71.02	73.03	
1.65	71.14	71.78	74.06	
1.32	71.78	73.26	75.89	
—	—	—	—	
—	—	—	—	
—	—	—	—	
—	—	—	—	

COSEL

Model	DBS200B03
Item	Overvoltage Protection 過電圧保護
Object	+3.3V50A

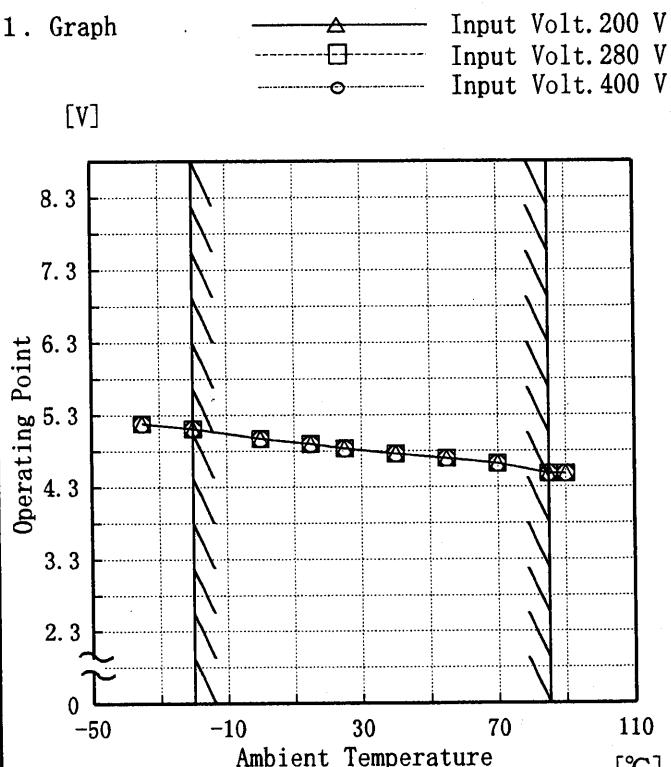

Load 0%

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Operating Point [V]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
-35	5.18	5.18	5.18
-20	5.11	5.11	5.11
0	4.97	4.97	4.97
15	4.90	4.90	4.90
25	4.83	4.83	4.83
40	4.76	4.76	4.76
55	4.69	4.69	4.69
70	4.62	4.62	4.62
85	4.48	4.48	4.48
90	4.48	4.48	4.48
—	—	—	—

COSEL

Model	DBS200B03	Temperature	25°C
Item	Dynamic Load Response 動的負荷變動	Testing Circuitry	Figure A
Object	+3.3V 50A		

Input Volt. 280 V



Cycle 1000 mS

Load Current



Min. Load (0.0A) ↔

Load 100% (50.0A)

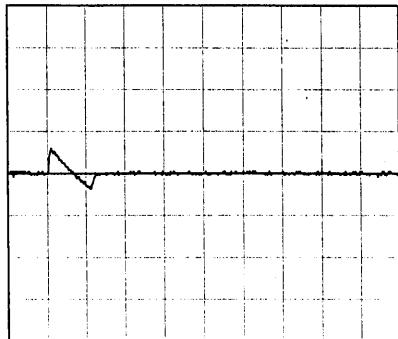
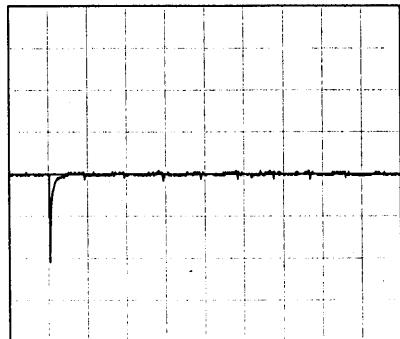


500 mV/div

5 ms/div

Min. Load (0.0A) ↔

Load 50% (25.0A)

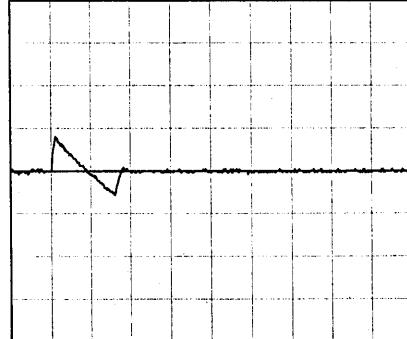
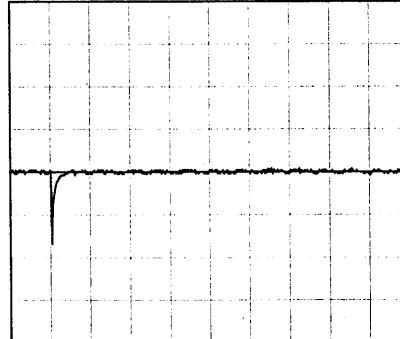


500 mV/div

5 ms/div

Load 10% (5.0A) ↔

Load 100% (50.0A)

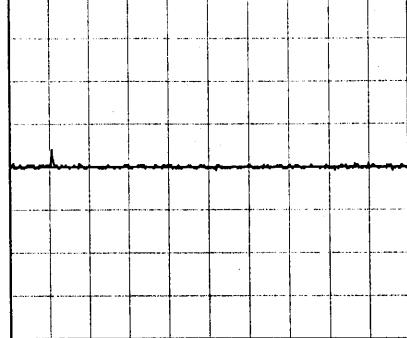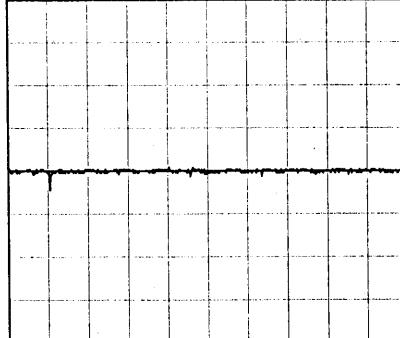

500 mV/div


5 ms/div

COSEL

Model	DBS200B03
Item	Rise and Fall Time 立上り、立下り時間
Object	+3.3V50A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

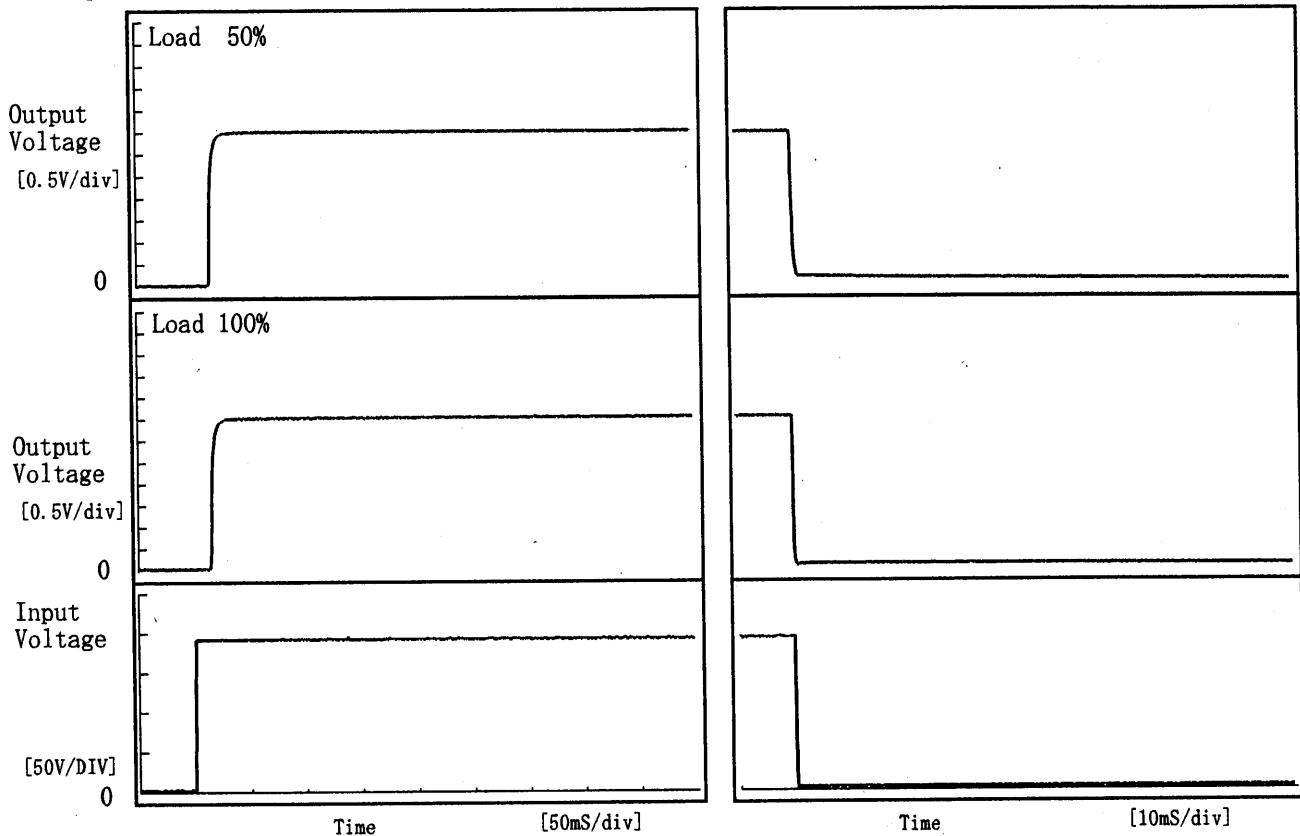

2. Values

Load \ Time	T d	T r	T s	T h	T f
50 %	15.25	3.25	18.50	0.0	0.80
100 %	15.50	3.50	19.00	0.0	0.35

[mS]

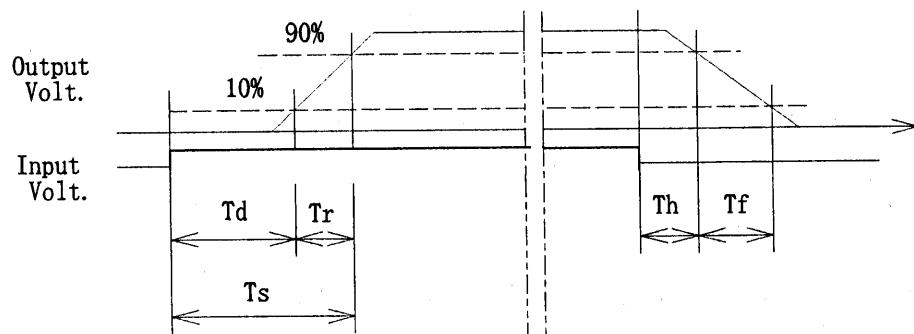

COSEL


Model DBS200B03

Item Ambient Temperature Drift
周囲温度変動

Object +3.3V 50A

1. Graph

△ Input Volt. 200V
 - - - □ Input Volt. 280V
 - - - ○ Input Volt. 400V

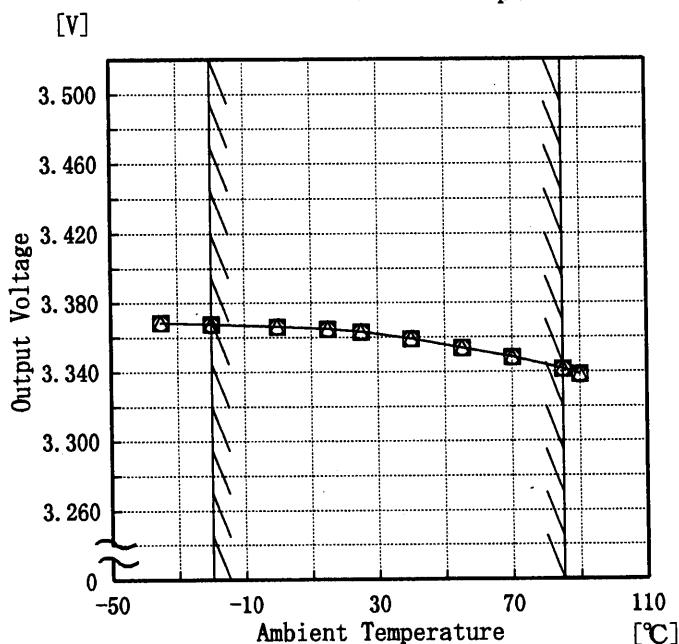

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A


2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 200[V]	Input Volt. 280[V]	Input Volt. 400[V]
-35	3.369	3.369	3.368
-20	3.368	3.368	3.368
0	3.366	3.366	3.366
15	3.365	3.365	3.365
25	3.363	3.363	3.363
40	3.359	3.359	3.359
55	3.354	3.354	3.354
70	3.348	3.348	3.348
85	3.342	3.341	3.341
90	3.339	3.338	3.338
—	—	—	—

COSEL

Model	DBS200B03
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+3.3V 50A

Testing Circuitry Figure A

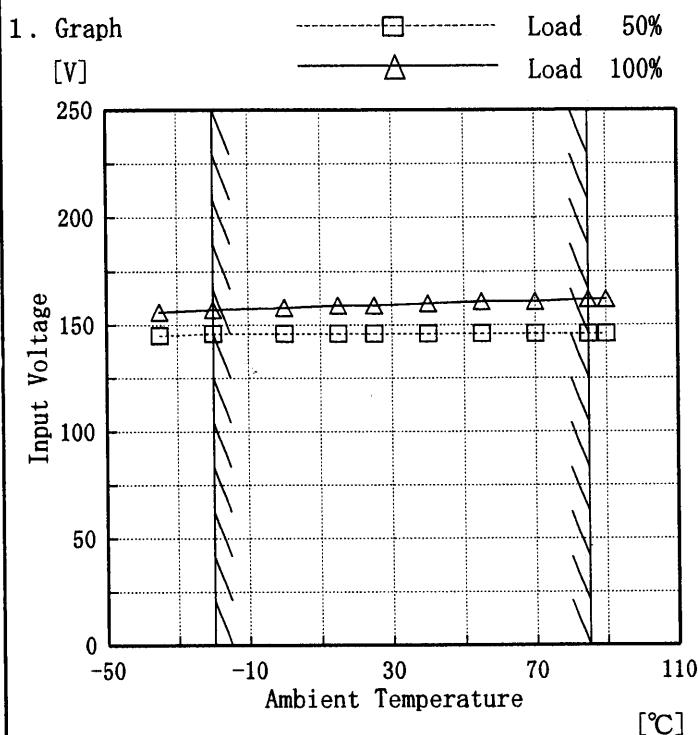

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL

Model DBS200B03


Item Ripple Voltage (by Ambient Temp.)
リップル電圧 (周囲温度特性)

Object +3.3V50A

1. Graph

Load 50%

 Load 100%

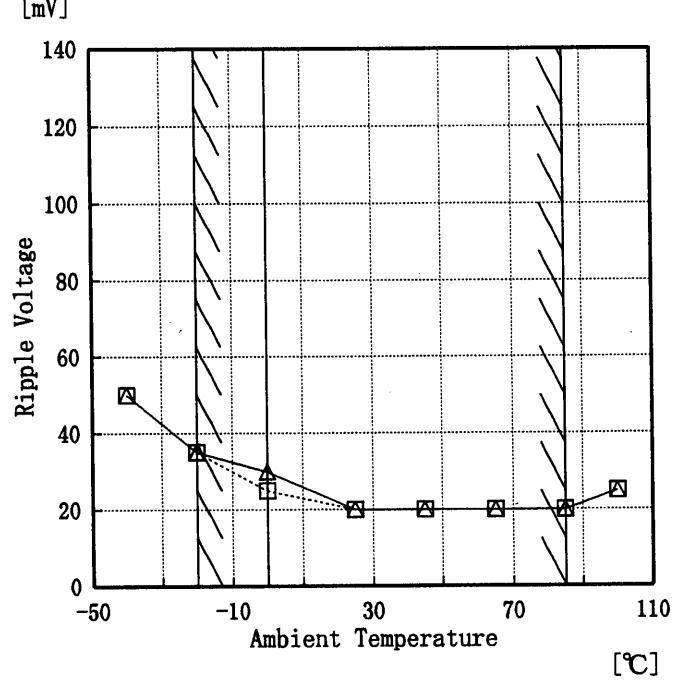

Input Volt. 280 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-40	50	50
-20	35	35
0	25	30
25	20	20
45	20	20
65	20	20
85	20	20
100	25	25
—	—	—
—	—	—
—	—	—

COSEL

Model	DBS200B03	Temperature Testing Circuitry Figure A	25 °C																						
Item	Time Lapse Drift 経時ドリフト																								
Object	+3.3V50A																								
1. Graph		2. Values																							
<p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 280V Load 100%</p>		<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>3.324</td></tr> <tr><td>0.5</td><td>3.321</td></tr> <tr><td>1.0</td><td>3.321</td></tr> <tr><td>2.0</td><td>3.321</td></tr> <tr><td>3.0</td><td>3.321</td></tr> <tr><td>4.0</td><td>3.321</td></tr> <tr><td>5.0</td><td>3.321</td></tr> <tr><td>6.0</td><td>3.321</td></tr> <tr><td>7.0</td><td>3.321</td></tr> <tr><td>8.0</td><td>3.321</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	3.324	0.5	3.321	1.0	3.321	2.0	3.321	3.0	3.321	4.0	3.321	5.0	3.321	6.0	3.321	7.0	3.321	8.0	3.321
Time since start [H]	Output Voltage [V]																								
0.0	3.324																								
0.5	3.321																								
1.0	3.321																								
2.0	3.321																								
3.0	3.321																								
4.0	3.321																								
5.0	3.321																								
6.0	3.321																								
7.0	3.321																								
8.0	3.321																								



Model	DBS200B03	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+3.3V50A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~85 °C

Input Voltage : 200~400 V

Load Current : 0~50 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~85 °C

入力電圧 200~400 V

負荷電流 0~50 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	200	0	3.372	±17	±0.6
Minimum Voltage	85	400	50	3.339		



Model	DBS200B03	Testing Circuitry Figure A
Item	Condensation 結露特性	
Object	+3.3V50A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	3.316	Input Volt.: 280V, Load Current:50A
Line Regulation [mV]	1	Input Volt.: 200~400V, Load Current:50A
Load Regulation [mV]	3	Input Volt.: 280V, Load Current:0~50A



Model	DBS200B03	Temperature Testing Circuitry	25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+3.3V50A		



1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

Conditions

Input Voltage : 200 V
 Pulse Voltage : ±2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration: 1 min. or more
 Load : 100 %

COSEL

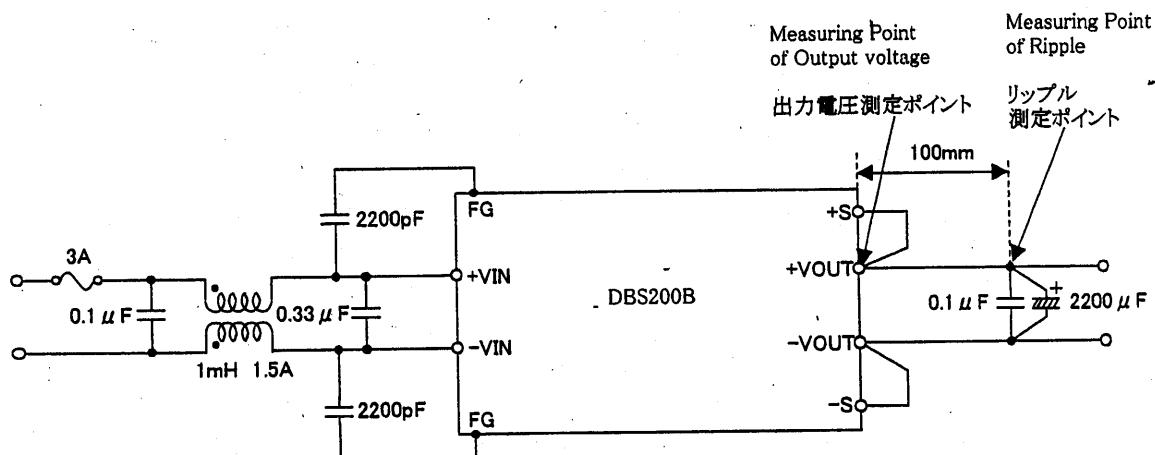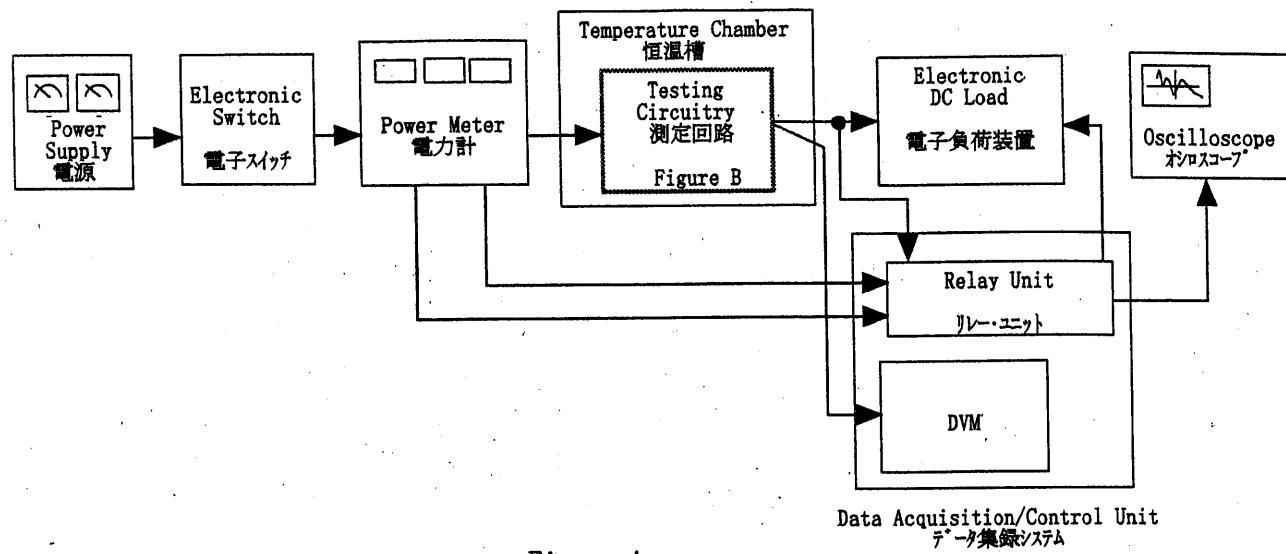

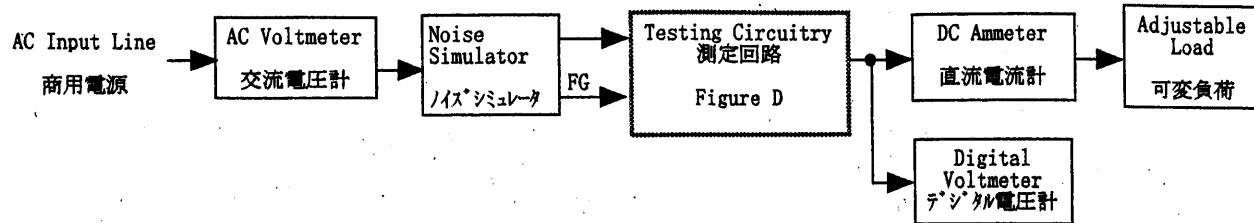
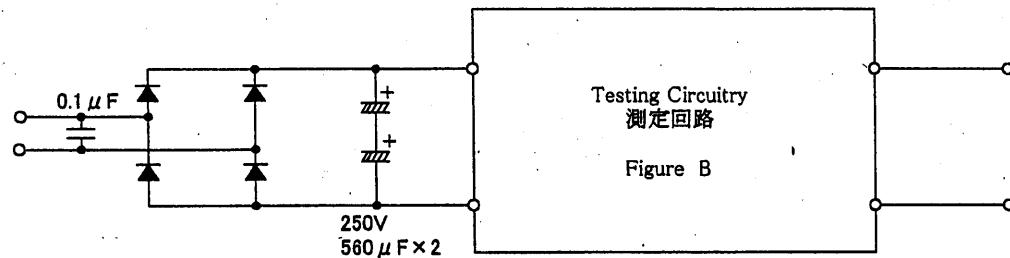


Figure C

Figure D (Line Noise Tolerance)
入力雑音耐量