



TEST DATA OF LDA10F-15

(200V INPUT)

Regulated DC Power Supply

Date : June 18. 1999

Approved by : H. Yamaguchi
Design Manager

Prepared by : T. Ashihara
Design Engineer

コーワセル株式会社
COSEL CO., LTD.



C O N T E N T S

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Hold-Up Time	6
出力保持時間	
7. Instantaneous Interruption Compensation	7
瞬時停電保障	
8. Load Regulation	8
静的負荷変動	
9. Ripple Voltage (by Load Current)	9
リップル電圧 (負荷特性)	
10. Ripple-Noise	10
リップルノイズ	
11. Overcurrent Protection	11
過電流保護	
12. Inrush Current	12
突入電流	
13. Dynamic Load Responce	13
動的負荷変動	
14. Rise and Fall Time	14
立ち上り、立下がり時間	
15. Ambient Temperature Drift	15
周囲温度変動	
16. Minimum Input Voltage for Regulated Output Voltage .	16
最低レギュレーション電圧	
17. Ripple Voltage (by Ambient Temperature)	17
リップル電圧 (周囲温度特性)	
18. Time Lapse Drift	18
経時ドリフト	
19. Output Voltage Accuracy	19
定電圧精度	
20. Condensation	20
結露特性	
21. Leakage Current	21
漏洩電流	
22. Line Noise Tolerance	22
入力雑音耐量	
23. Conducted Emission	23
雑音端子電圧	
24. Figure of Testing Circuitry	24
測定回路図	

(Final Page 25)

COSEL

Model	LDA10F-15	Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																		
Object	+15.0V 0.7A																																		
1. Graph		2. Values																																	
<p>Load 50% □</p> <p>Load 100% △</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>150</td><td>15.460</td><td>15.459</td> </tr> <tr> <td>160</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>170</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>180</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>200</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>220</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>240</td><td>15.460</td><td>15.460</td> </tr> <tr> <td>264</td><td>15.460</td><td>15.459</td> </tr> <tr> <td>280</td><td>15.461</td><td>15.459</td> </tr> </tbody> </table>		Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	150	15.460	15.459	160	15.460	15.460	170	15.460	15.460	180	15.460	15.460	200	15.460	15.460	220	15.460	15.460	240	15.460	15.460	264	15.460	15.459	280	15.461	15.459
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
150	15.460	15.459																																	
160	15.460	15.460																																	
170	15.460	15.460																																	
180	15.460	15.460																																	
200	15.460	15.460																																	
220	15.460	15.460																																	
240	15.460	15.460																																	
264	15.460	15.459																																	
280	15.461	15.459																																	


Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA10F-15																																																									
Item	Input Current (by Load Current) 入力電流（負荷特性）	Temperature 25°C	Testing Circuitry Figure A																																																							
Output	_____																																																									
1. Graph	<p>—△— Input Volt. 170V -□- Input Volt. 200V -○- Input Volt. 264V</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.031</td><td>0.032</td><td>0.036</td></tr> <tr><td>0.10</td><td>0.054</td><td>0.053</td><td>0.053</td></tr> <tr><td>0.20</td><td>0.074</td><td>0.071</td><td>0.069</td></tr> <tr><td>0.30</td><td>0.095</td><td>0.089</td><td>0.083</td></tr> <tr><td>0.40</td><td>0.114</td><td>0.107</td><td>0.097</td></tr> <tr><td>0.50</td><td>0.133</td><td>0.124</td><td>0.111</td></tr> <tr><td>0.60</td><td>0.152</td><td>0.140</td><td>0.125</td></tr> <tr><td>0.70</td><td>0.169</td><td>0.155</td><td>0.138</td></tr> <tr><td>0.77</td><td>0.182</td><td>0.166</td><td>0.147</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	0.031	0.032	0.036	0.10	0.054	0.053	0.053	0.20	0.074	0.071	0.069	0.30	0.095	0.089	0.083	0.40	0.114	0.107	0.097	0.50	0.133	0.124	0.111	0.60	0.152	0.140	0.125	0.70	0.169	0.155	0.138	0.77	0.182	0.166	0.147	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.00	0.031	0.032	0.036																																																							
0.10	0.054	0.053	0.053																																																							
0.20	0.074	0.071	0.069																																																							
0.30	0.095	0.089	0.083																																																							
0.40	0.114	0.107	0.097																																																							
0.50	0.133	0.124	0.111																																																							
0.60	0.152	0.140	0.125																																																							
0.70	0.169	0.155	0.138																																																							
0.77	0.182	0.166	0.147																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
Note:	Slanted line shows the range of the rated load current																																																									
(注)	斜線は定格負荷電流範囲を示す。																																																									

COSEL

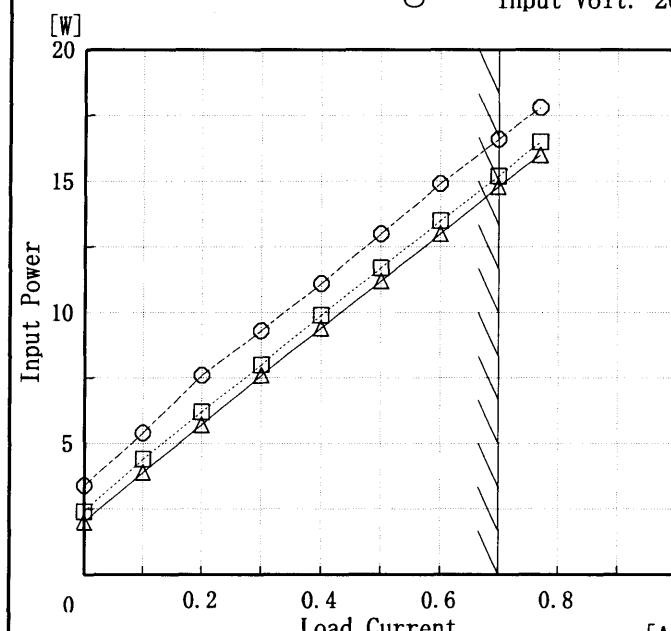Model	LDA10F-15																																																									
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																							
Output	_____																																																									
1. Graph	<p style="text-align: center;">—△— Input Volt. 170V —□— Input Volt. 200V —○— Input Volt. 264V</p>  <p>The graph plots Input Power [W] on the y-axis (0 to 20) against Load Current [A] on the x-axis (0 to 1). Three curves are shown for different input voltages: 170V (triangles), 200V (squares), and 264V (circles). All curves show a linear increase in input power with load current. A slanted line is drawn through the origin, representing the rated load current range.</p>																																																									
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>2.00</td><td>2.40</td><td>3.40</td></tr> <tr><td>0.10</td><td>3.90</td><td>4.40</td><td>5.40</td></tr> <tr><td>0.20</td><td>5.70</td><td>6.20</td><td>7.60</td></tr> <tr><td>0.30</td><td>7.60</td><td>8.00</td><td>9.30</td></tr> <tr><td>0.40</td><td>9.40</td><td>9.90</td><td>11.10</td></tr> <tr><td>0.50</td><td>11.20</td><td>11.70</td><td>13.00</td></tr> <tr><td>0.60</td><td>13.00</td><td>13.50</td><td>14.90</td></tr> <tr><td>0.70</td><td>14.80</td><td>15.20</td><td>16.60</td></tr> <tr><td>0.77</td><td>16.00</td><td>16.50</td><td>17.80</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	2.00	2.40	3.40	0.10	3.90	4.40	5.40	0.20	5.70	6.20	7.60	0.30	7.60	8.00	9.30	0.40	9.40	9.90	11.10	0.50	11.20	11.70	13.00	0.60	13.00	13.50	14.90	0.70	14.80	15.20	16.60	0.77	16.00	16.50	17.80	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.00	2.00	2.40	3.40																																																							
0.10	3.90	4.40	5.40																																																							
0.20	5.70	6.20	7.60																																																							
0.30	7.60	8.00	9.30																																																							
0.40	9.40	9.90	11.10																																																							
0.50	11.20	11.70	13.00																																																							
0.60	13.00	13.50	14.90																																																							
0.70	14.80	15.20	16.60																																																							
0.77	16.00	16.50	17.80																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。



Model	LDA10F-15																																		
Item	Efficiency 効率																																		
Object																																			
1. Graph		Temperature 25°C Testing Circuitry Figure A																																	
<p>Efficiency [%]</p> <p>Input Voltage [V]</p>		2. Values																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>67.2</td><td>76.0</td></tr> <tr><td>160</td><td>65.7</td><td>75.4</td></tr> <tr><td>170</td><td>64.0</td><td>74.4</td></tr> <tr><td>180</td><td>63.2</td><td>73.7</td></tr> <tr><td>200</td><td>61.3</td><td>72.3</td></tr> <tr><td>220</td><td>59.0</td><td>70.6</td></tr> <tr><td>240</td><td>56.6</td><td>69.1</td></tr> <tr><td>264</td><td>53.2</td><td>66.5</td></tr> <tr><td>280</td><td>51.0</td><td>65.5</td></tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	67.2	76.0	160	65.7	75.4	170	64.0	74.4	180	63.2	73.7	200	61.3	72.3	220	59.0	70.6	240	56.6	69.1	264	53.2	66.5	280	51.0	65.5		
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
150	67.2	76.0																																	
160	65.7	75.4																																	
170	64.0	74.4																																	
180	63.2	73.7																																	
200	61.3	72.3																																	
220	59.0	70.6																																	
240	56.6	69.1																																	
264	53.2	66.5																																	
280	51.0	65.5																																	

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA10F-15																																																									
Item	Efficiency (by Load Current) 効率 (負荷電流特性)	Temperature 25°C	Testing Circuitry Figure A																																																							
Output	_____																																																									
1. Graph																																																										
<p>The graph plots Efficiency [%] on the y-axis (30 to 80) against Load Current [A] on the x-axis (0 to 1). Three data series are shown for Input Volt. 170V (triangles), Input Volt. 200V (squares), and Input Volt. 264V (circles). All series show an upward trend. A slanted line is drawn through the data points, representing the rated load current range.</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.10</td><td>42.1</td><td>37.4</td><td>30.5</td></tr> <tr><td>0.20</td><td>55.9</td><td>51.3</td><td>41.9</td></tr> <tr><td>0.30</td><td>62.3</td><td>59.0</td><td>50.9</td></tr> <tr><td>0.40</td><td>66.7</td><td>63.4</td><td>56.5</td></tr> <tr><td>0.50</td><td>70.1</td><td>67.1</td><td>60.3</td></tr> <tr><td>0.60</td><td>72.4</td><td>69.8</td><td>63.3</td></tr> <tr><td>0.70</td><td>73.9</td><td>72.0</td><td>65.9</td></tr> <tr><td>0.77</td><td>75.1</td><td>72.8</td><td>67.5</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.10	42.1	37.4	30.5	0.20	55.9	51.3	41.9	0.30	62.3	59.0	50.9	0.40	66.7	63.4	56.5	0.50	70.1	67.1	60.3	0.60	72.4	69.8	63.3	0.70	73.9	72.0	65.9	0.77	75.1	72.8	67.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—						
Load Current [A]	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.10	42.1	37.4	30.5																																																							
0.20	55.9	51.3	41.9																																																							
0.30	62.3	59.0	50.9																																																							
0.40	66.7	63.4	56.5																																																							
0.50	70.1	67.1	60.3																																																							
0.60	72.4	69.8	63.3																																																							
0.70	73.9	72.0	65.9																																																							
0.77	75.1	72.8	67.5																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
2. Values		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.10</td><td>42.1</td><td>37.4</td><td>30.5</td></tr> <tr><td>0.20</td><td>55.9</td><td>51.3</td><td>41.9</td></tr> <tr><td>0.30</td><td>62.3</td><td>59.0</td><td>50.9</td></tr> <tr><td>0.40</td><td>66.7</td><td>63.4</td><td>56.5</td></tr> <tr><td>0.50</td><td>70.1</td><td>67.1</td><td>60.3</td></tr> <tr><td>0.60</td><td>72.4</td><td>69.8</td><td>63.3</td></tr> <tr><td>0.70</td><td>73.9</td><td>72.0</td><td>65.9</td></tr> <tr><td>0.77</td><td>75.1</td><td>72.8</td><td>67.5</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.10	42.1	37.4	30.5	0.20	55.9	51.3	41.9	0.30	62.3	59.0	50.9	0.40	66.7	63.4	56.5	0.50	70.1	67.1	60.3	0.60	72.4	69.8	63.3	0.70	73.9	72.0	65.9	0.77	75.1	72.8	67.5	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
0.10	42.1	37.4	30.5																																																							
0.20	55.9	51.3	41.9																																																							
0.30	62.3	59.0	50.9																																																							
0.40	66.7	63.4	56.5																																																							
0.50	70.1	67.1	60.3																																																							
0.60	72.4	69.8	63.3																																																							
0.70	73.9	72.0	65.9																																																							
0.77	75.1	72.8	67.5																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							
—	—	—	—																																																							

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA10F-15	Temperature Testing Circuitry	25°C Figure A																																
Item	Hold-Up Time 出力保持時間																																		
Object	+15.0V 0.7A																																		
1. Graph	<p style="text-align: center;">□ Load 50% △ Load 100%</p>																																		
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Hold-Up Time [mS]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>150</td><td>136</td><td>68</td></tr> <tr><td>160</td><td>155</td><td>79</td></tr> <tr><td>170</td><td>174</td><td>90</td></tr> <tr><td>180</td><td>195</td><td>101</td></tr> <tr><td>200</td><td>239</td><td>126</td></tr> <tr><td>220</td><td>286</td><td>153</td></tr> <tr><td>240</td><td>337</td><td>183</td></tr> <tr><td>264</td><td>402</td><td>221</td></tr> <tr><td>280</td><td>449</td><td>249</td></tr> </tbody> </table>			Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	136	68	160	155	79	170	174	90	180	195	101	200	239	126	220	286	153	240	337	183	264	402	221	280	449	249
Input Voltage [V]	Hold-Up Time [mS]																																		
	Load 50%	Load 100%																																	
150	136	68																																	
160	155	79																																	
170	174	90																																	
180	195	101																																	
200	239	126																																	
220	286	153																																	
240	337	183																																	
264	402	221																																	
280	449	249																																	

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

COSEL

Model	LDA10F-15	Temperature 25°C Testing Circuitry Figure A																																																					
Item	Instantaneous Interruption Compensation 瞬時停電保障																																																						
Object	+15.0V 0.7A																																																						
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 170 V (△) Input Volt. 200 V (□) Input Volt. 264 V (○) 																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Time [mS]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>0.10</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>0.20</td><td>267</td><td>363</td><td>597</td></tr> <tr> <td>0.30</td><td>197</td><td>271</td><td>456</td></tr> <tr> <td>0.40</td><td>151</td><td>210</td><td>361</td></tr> <tr> <td>0.50</td><td>122</td><td>171</td><td>298</td></tr> <tr> <td>0.60</td><td>101</td><td>144</td><td>255</td></tr> <tr> <td>0.70</td><td>85</td><td>123</td><td>220</td></tr> <tr> <td>0.77</td><td>77</td><td>112</td><td>203</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Time [mS]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	—	—	—	0.10	—	—	—	0.20	267	363	597	0.30	197	271	456	0.40	151	210	361	0.50	122	171	298	0.60	101	144	255	0.70	85	123	220	0.77	77	112	203	—	—	—	—	—	—	—	—
Load Current [A]	Time [mS]																																																						
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																				
0.00	—	—	—																																																				
0.10	—	—	—																																																				
0.20	267	363	597																																																				
0.30	197	271	456																																																				
0.40	151	210	361																																																				
0.50	122	171	298																																																				
0.60	101	144	255																																																				
0.70	85	123	220																																																				
0.77	77	112	203																																																				
—	—	—	—																																																				
—	—	—	—																																																				

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	LDA10F-15	Temperature	25°C																																															
Item	Load Regulation 靜的負荷変動	Testing Circuitry	Figure A																																															
Object	+15.0V 0.7A																																																	
1. Graph	<p>Legend:</p> <ul style="list-style-type: none"> Input Volt. 170 V (solid line) Input Volt. 200 V (dashed line) Input Volt. 264 V (dotted line) 																																																	
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>15.464</td><td>15.463</td><td>15.464</td></tr> <tr><td>0.10</td><td>15.463</td><td>15.462</td><td>15.463</td></tr> <tr><td>0.20</td><td>15.462</td><td>15.462</td><td>15.462</td></tr> <tr><td>0.30</td><td>15.462</td><td>15.461</td><td>15.461</td></tr> <tr><td>0.40</td><td>15.461</td><td>15.461</td><td>15.461</td></tr> <tr><td>0.50</td><td>15.461</td><td>15.461</td><td>15.461</td></tr> <tr><td>0.60</td><td>15.461</td><td>15.461</td><td>15.460</td></tr> <tr><td>0.70</td><td>15.461</td><td>15.460</td><td>15.460</td></tr> <tr><td>0.77</td><td>15.460</td><td>15.460</td><td>15.460</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	15.464	15.463	15.464	0.10	15.463	15.462	15.463	0.20	15.462	15.462	15.462	0.30	15.462	15.461	15.461	0.40	15.461	15.461	15.461	0.50	15.461	15.461	15.461	0.60	15.461	15.461	15.460	0.70	15.461	15.460	15.460	0.77	15.460	15.460	15.460	—	—	—	—
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																															
0.00	15.464	15.463	15.464																																															
0.10	15.463	15.462	15.463																																															
0.20	15.462	15.462	15.462																																															
0.30	15.462	15.461	15.461																																															
0.40	15.461	15.461	15.461																																															
0.50	15.461	15.461	15.461																																															
0.60	15.461	15.461	15.460																																															
0.70	15.461	15.460	15.460																																															
0.77	15.460	15.460	15.460																																															
—	—	—	—																																															

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL


Model	LDA10F-15	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)																																								
Object	+15.0V 0.7A																																								
1. Graph	<p>□ Input Volt. 170V [mV] △ ----- Input Volt. 264V</p>																																								
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>10</td><td>10</td></tr> <tr><td>0.20</td><td>10</td><td>10</td></tr> <tr><td>0.30</td><td>10</td><td>10</td></tr> <tr><td>0.40</td><td>10</td><td>10</td></tr> <tr><td>0.50</td><td>10</td><td>10</td></tr> <tr><td>0.60</td><td>15</td><td>15</td></tr> <tr><td>0.77</td><td>15</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	10	10	0.10	10	10	0.20	10	10	0.30	10	10	0.40	10	10	0.50	10	10	0.60	15	15	0.77	15	15	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.00	10	10																																							
0.10	10	10																																							
0.20	10	10																																							
0.30	10	10																																							
0.40	10	10																																							
0.50	10	10																																							
0.60	15	15																																							
0.77	15	15																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
Ripple Voltage is shown as p-p in the figure below.																																									
Note: Slanted line shows the range of the rated load current.																																									
リップル電圧は、下図 p – p 値で示される。 (注)斜線は定格負荷電流範囲を示す。																																									
T1: Due to AC Input Line T2: Due to Switching																																									
Ripple [mVp-p]																																									
Fig. Complex Ripple Wave Form 図 リップル波形詳細図																																									

COSEL


Model	LDA10F-15	Temperature Testing Circuitry 25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																							
Object	+15.0V 0.7A																																							
1. Graph	<p>Input Volt. 170V [mV] □ Input Volt. 264V △</p> <table border="1"> <caption>Data extracted from Graph 1</caption> <thead> <tr> <th>Load Current [A]</th> <th>Ripple-Noise 170V [mV] (□)</th> <th>Ripple-Noise 264V [mV] (△)</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>15</td><td>15</td></tr> <tr><td>0.20</td><td>15</td><td>15</td></tr> <tr><td>0.30</td><td>15</td><td>15</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.50</td><td>15</td><td>15</td></tr> <tr><td>0.60</td><td>20</td><td>20</td></tr> <tr><td>0.70</td><td>25</td><td>20</td></tr> <tr><td>0.77</td><td>25</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise 170V [mV] (□)	Ripple-Noise 264V [mV] (△)	0.00	10	10	0.10	15	15	0.20	15	15	0.30	15	15	0.40	15	15	0.50	15	15	0.60	20	20	0.70	25	20	0.77	25	20	—	—	—	—	—	—			
Load Current [A]	Ripple-Noise 170V [mV] (□)	Ripple-Noise 264V [mV] (△)																																						
0.00	10	10																																						
0.10	15	15																																						
0.20	15	15																																						
0.30	15	15																																						
0.40	15	15																																						
0.50	15	15																																						
0.60	20	20																																						
0.70	25	20																																						
0.77	25	20																																						
—	—	—																																						
—	—	—																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 170 [V]</th> <th>Input Volt. 264 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>10</td><td>10</td></tr> <tr><td>0.10</td><td>15</td><td>15</td></tr> <tr><td>0.20</td><td>15</td><td>15</td></tr> <tr><td>0.30</td><td>15</td><td>15</td></tr> <tr><td>0.40</td><td>15</td><td>15</td></tr> <tr><td>0.50</td><td>15</td><td>20</td></tr> <tr><td>0.60</td><td>20</td><td>20</td></tr> <tr><td>0.70</td><td>25</td><td>20</td></tr> <tr><td>0.77</td><td>25</td><td>20</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	10	10	0.10	15	15	0.20	15	15	0.30	15	15	0.40	15	15	0.50	15	20	0.60	20	20	0.70	25	20	0.77	25	20	—	—	—	—	—	—
Load current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]																																						
	Ripple-Noise [mV]	Ripple-Noise [mV]																																						
0.00	10	10																																						
0.10	15	15																																						
0.20	15	15																																						
0.30	15	15																																						
0.40	15	15																																						
0.50	15	20																																						
0.60	20	20																																						
0.70	25	20																																						
0.77	25	20																																						
—	—	—																																						
—	—	—																																						
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line 入力商用周期 T2: Due to Switching スイッチング周期</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								


COSEL

Model	LDA10F-15	Temperature 25°C Testing Circuitry Figure A																																																								
Item	Overcurrent Protection 過電流保護																																																									
Object	+15.0V 0.7A																																																									
1. Graph	[V]	Input Volt. 170 V Input Volt. 200 V Input Volt. 264 V																																																								
		<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																								
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>15.00</td><td>1.03</td><td>1.02</td><td>1.02</td></tr> <tr><td>14.25</td><td>1.06</td><td>1.04</td><td>1.04</td></tr> <tr><td>13.50</td><td>1.08</td><td>1.07</td><td>1.06</td></tr> <tr><td>12.00</td><td>1.13</td><td>1.11</td><td>1.11</td></tr> <tr><td>10.50</td><td>1.18</td><td>1.16</td><td>1.15</td></tr> <tr><td>9.00</td><td>1.22</td><td>1.20</td><td>1.19</td></tr> <tr><td>7.50</td><td>1.26</td><td>1.22</td><td>1.23</td></tr> <tr><td>6.00</td><td>1.27</td><td>1.24</td><td>1.24</td></tr> <tr><td>4.50</td><td>1.27</td><td>1.24</td><td>1.26</td></tr> <tr><td>3.00</td><td>1.23</td><td>1.21</td><td>1.24</td></tr> <tr><td>1.50</td><td>1.11</td><td>1.11</td><td>1.17</td></tr> <tr><td>0.00</td><td>0.90</td><td>0.93</td><td>1.01</td></tr> </tbody> </table>			Output Voltage [V]	Load Current [A]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	15.00	1.03	1.02	1.02	14.25	1.06	1.04	1.04	13.50	1.08	1.07	1.06	12.00	1.13	1.11	1.11	10.50	1.18	1.16	1.15	9.00	1.22	1.20	1.19	7.50	1.26	1.22	1.23	6.00	1.27	1.24	1.24	4.50	1.27	1.24	1.26	3.00	1.23	1.21	1.24	1.50	1.11	1.11	1.17	0.00	0.90	0.93	1.01
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																							
15.00	1.03	1.02	1.02																																																							
14.25	1.06	1.04	1.04																																																							
13.50	1.08	1.07	1.06																																																							
12.00	1.13	1.11	1.11																																																							
10.50	1.18	1.16	1.15																																																							
9.00	1.22	1.20	1.19																																																							
7.50	1.26	1.22	1.23																																																							
6.00	1.27	1.24	1.24																																																							
4.50	1.27	1.24	1.26																																																							
3.00	1.23	1.21	1.24																																																							
1.50	1.11	1.11	1.17																																																							
0.00	0.90	0.93	1.01																																																							

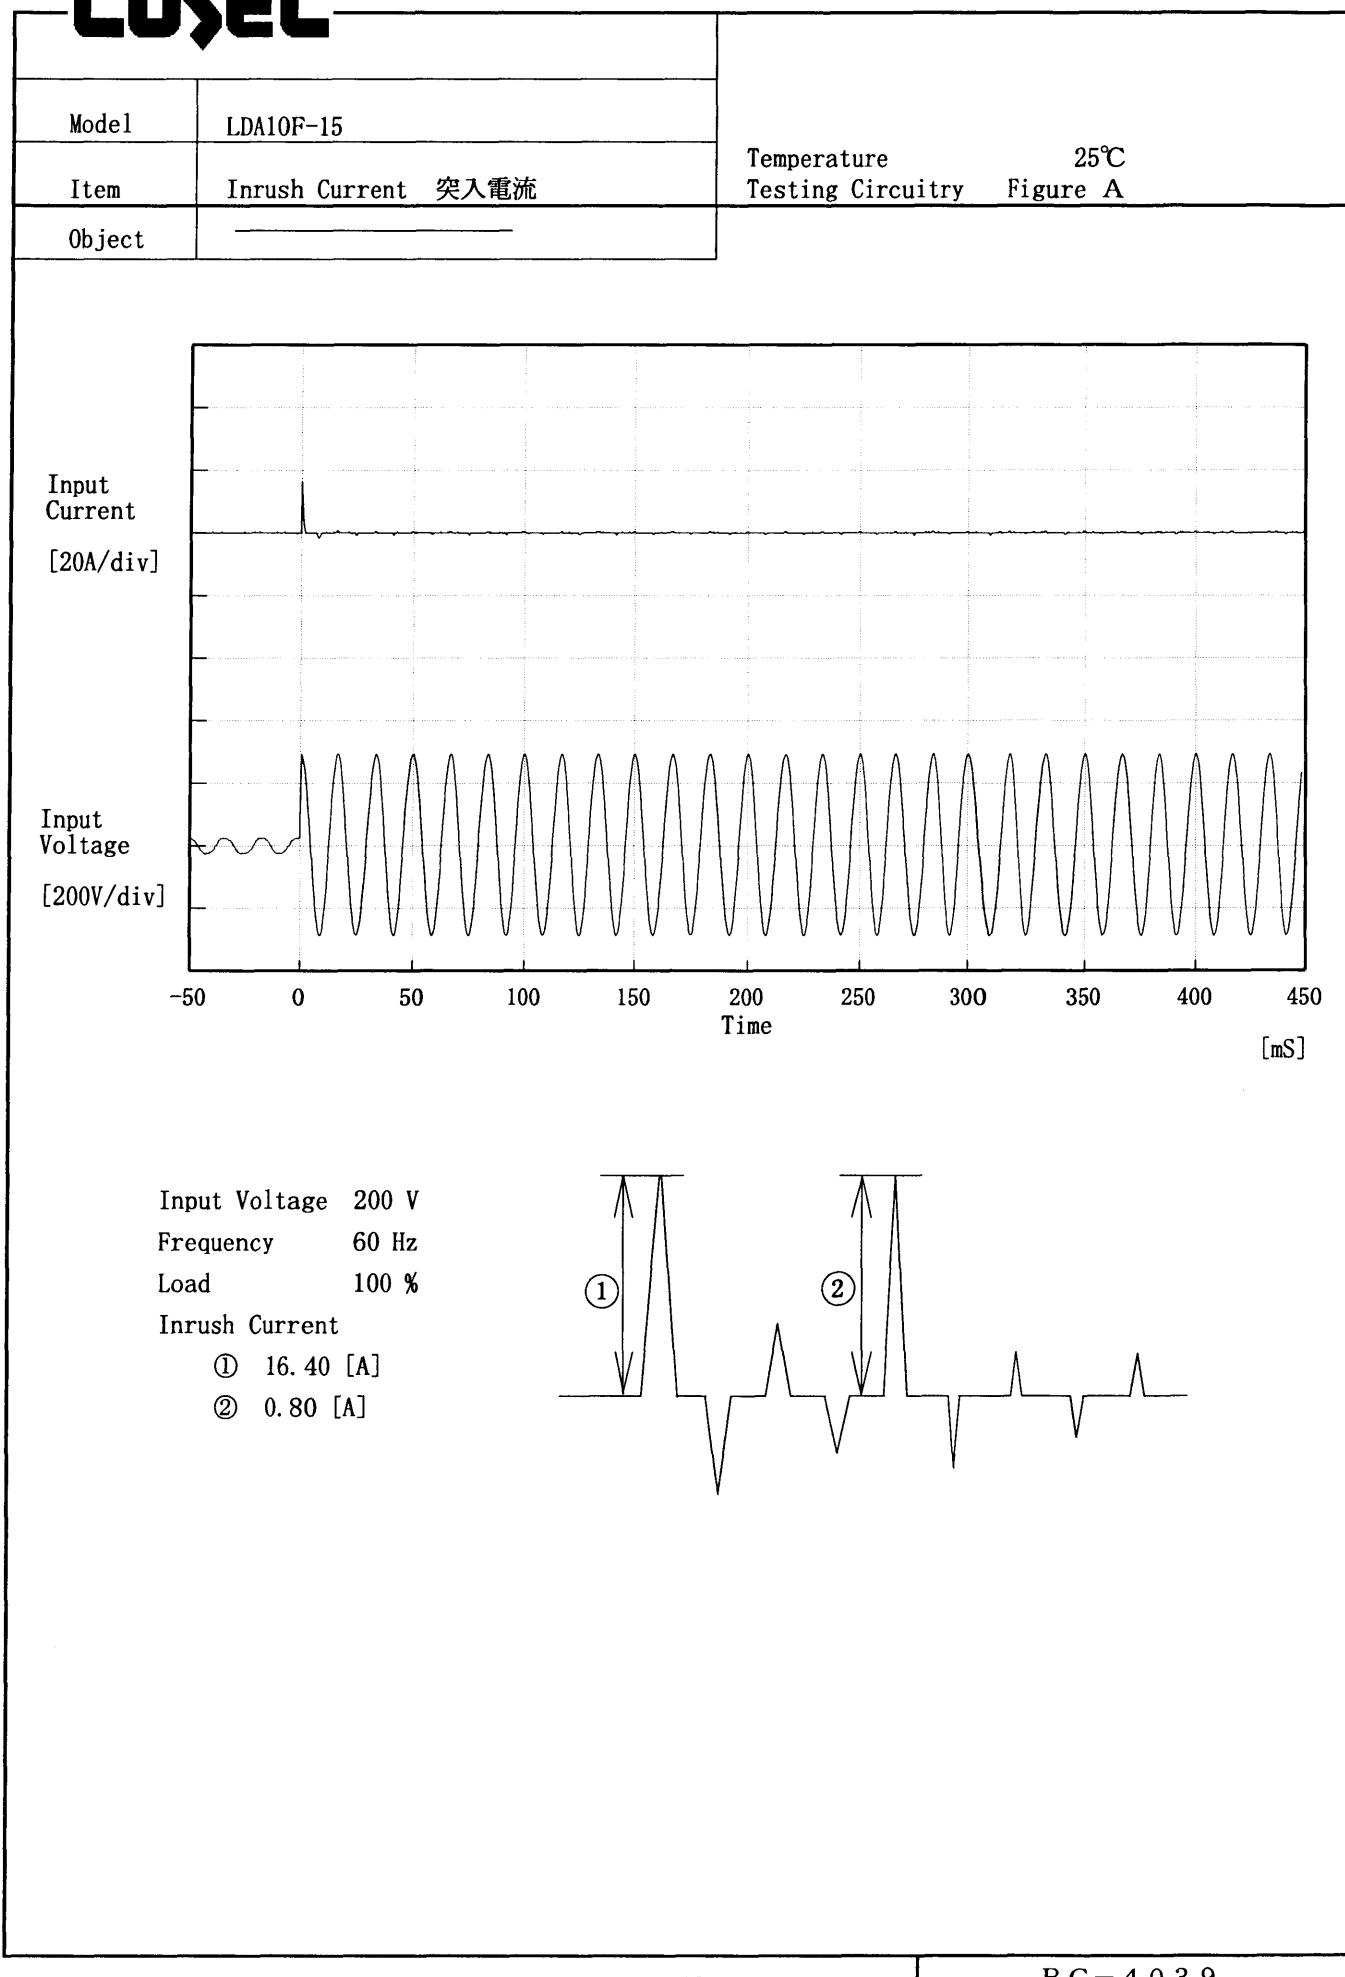COSEL

COSEL

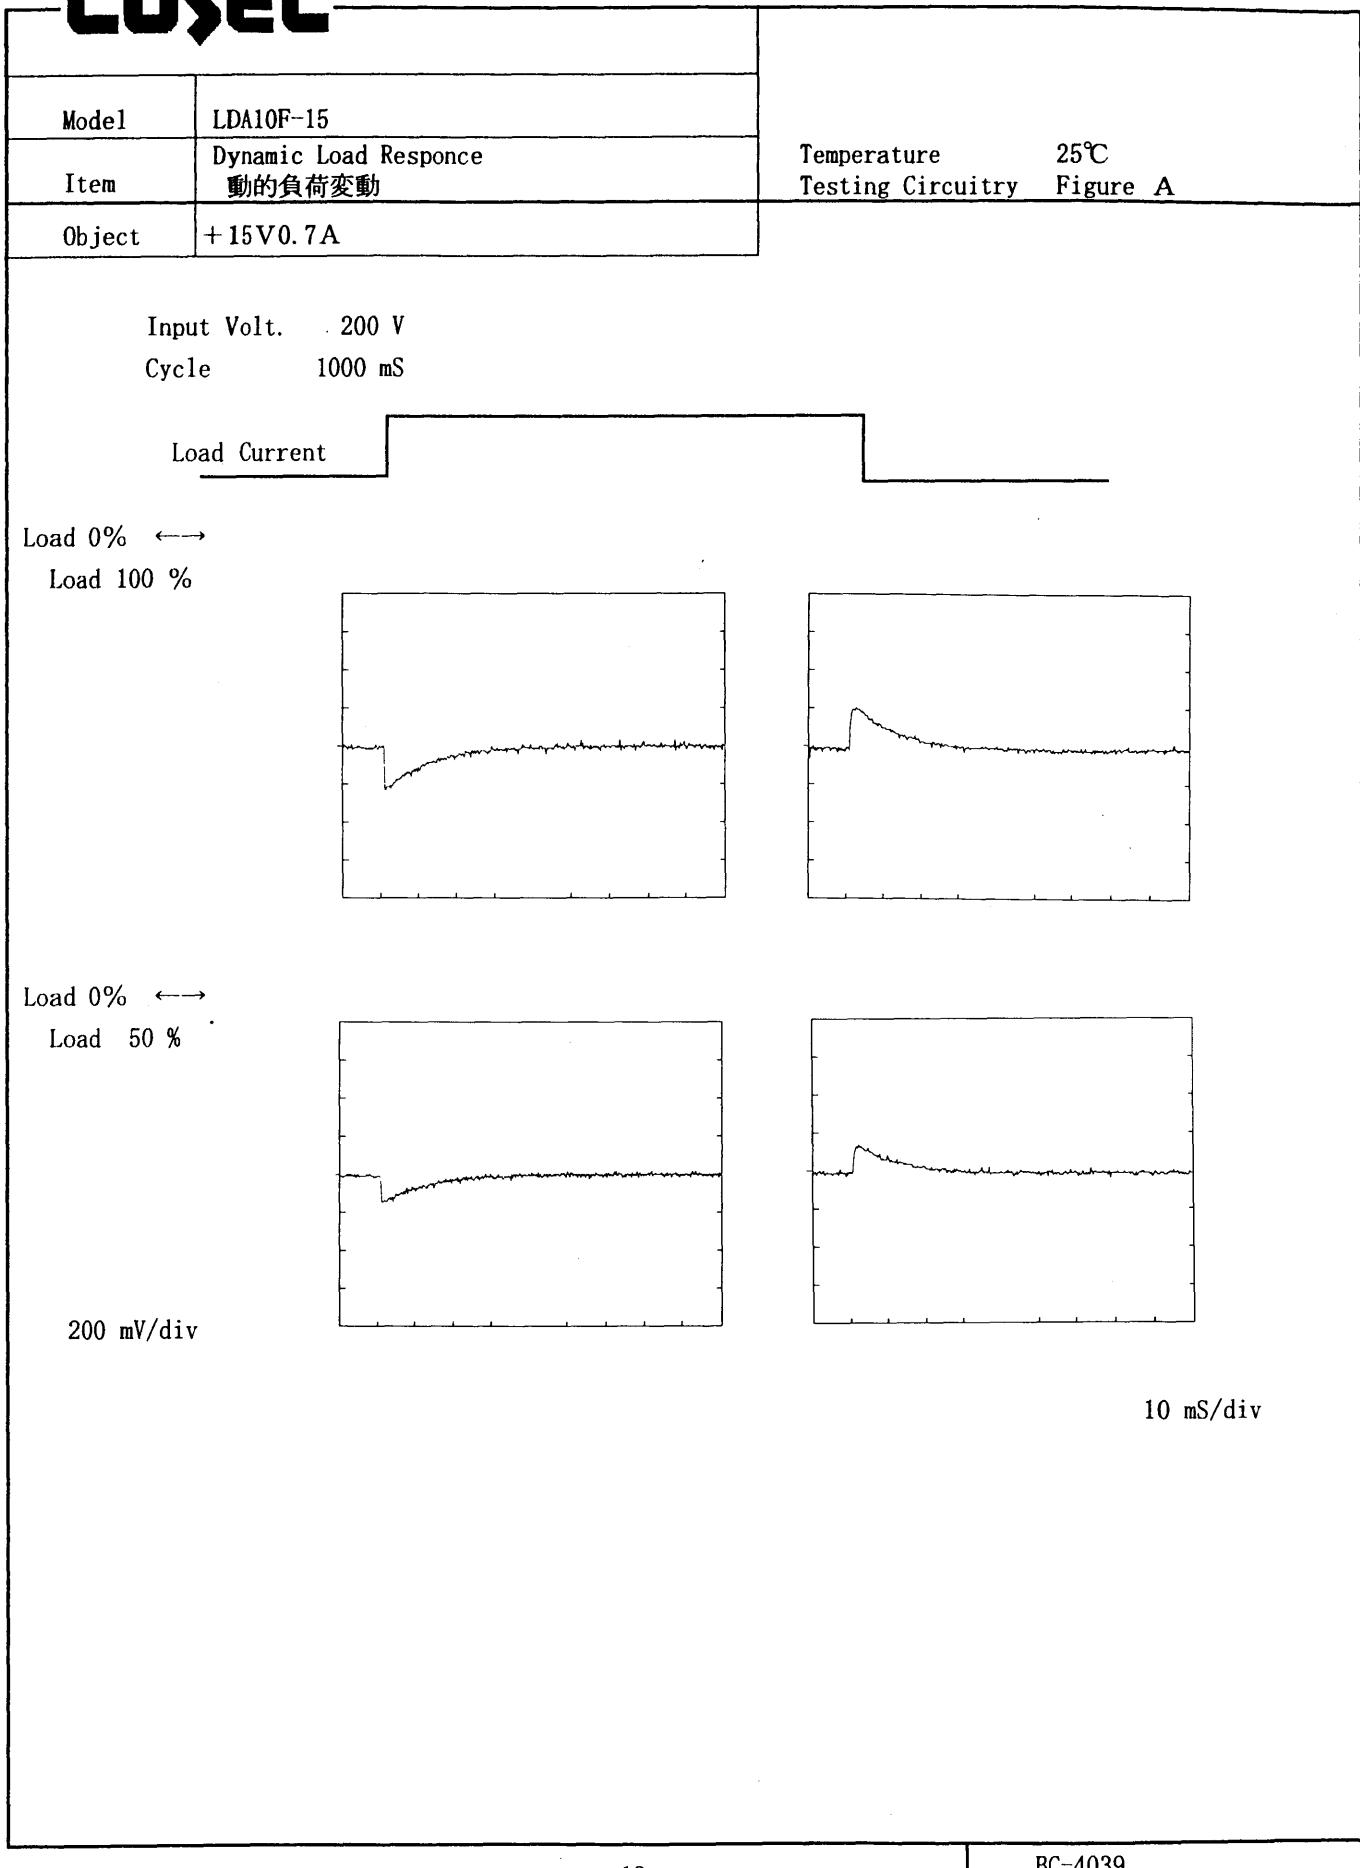

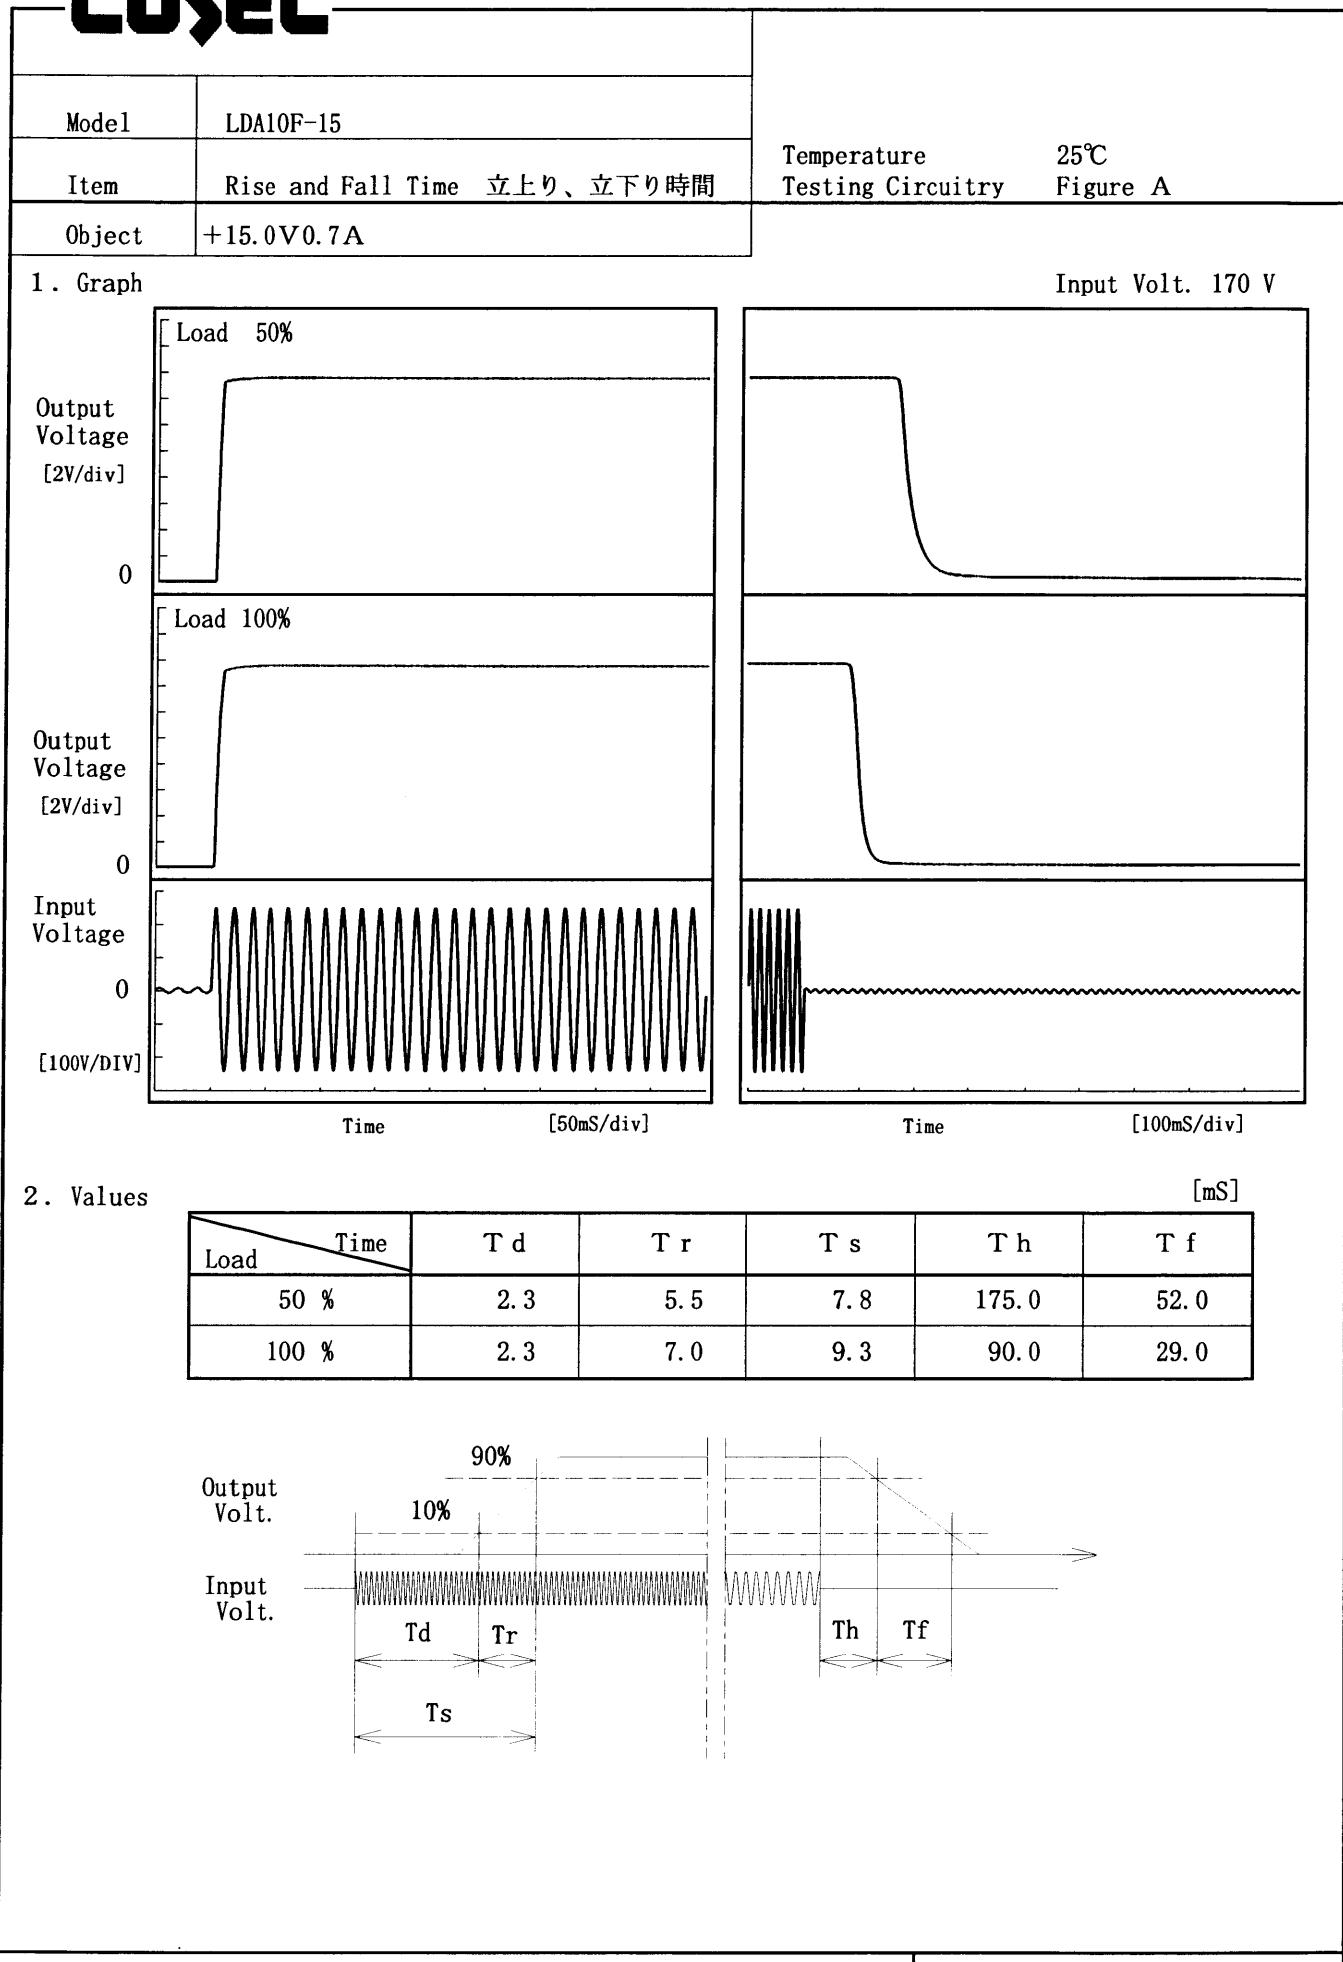
COSEL

COSEL

Model	LDA10F-15	Testing Circuitry Figure A																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																						
Object	+15.0V 0.7A																																																						
1. Graph	<p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 170[V]</th> <th>Input Volt. 200[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>-20</td><td>15.451</td><td>15.451</td><td>15.451</td></tr> <tr> <td>-10</td><td>15.452</td><td>15.452</td><td>15.452</td></tr> <tr> <td>0</td><td>15.453</td><td>15.453</td><td>15.453</td></tr> <tr> <td>10</td><td>15.454</td><td>15.454</td><td>15.454</td></tr> <tr> <td>20</td><td>15.457</td><td>15.457</td><td>15.457</td></tr> <tr> <td>25</td><td>15.458</td><td>15.458</td><td>15.458</td></tr> <tr> <td>30</td><td>15.460</td><td>15.460</td><td>15.459</td></tr> <tr> <td>40</td><td>15.459</td><td>15.459</td><td>15.459</td></tr> <tr> <td>50</td><td>15.458</td><td>15.458</td><td>15.458</td></tr> <tr> <td>60</td><td>15.452</td><td>15.452</td><td>15.451</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Temperature [°C]	Output Voltage [V]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	-20	15.451	15.451	15.451	-10	15.452	15.452	15.452	0	15.453	15.453	15.453	10	15.454	15.454	15.454	20	15.457	15.457	15.457	25	15.458	15.458	15.458	30	15.460	15.460	15.459	40	15.459	15.459	15.459	50	15.458	15.458	15.458	60	15.452	15.452	15.451	—	—	—	—
Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																				
-20	15.451	15.451	15.451																																																				
-10	15.452	15.452	15.452																																																				
0	15.453	15.453	15.453																																																				
10	15.454	15.454	15.454																																																				
20	15.457	15.457	15.457																																																				
25	15.458	15.458	15.458																																																				
30	15.460	15.460	15.459																																																				
40	15.459	15.459	15.459																																																				
50	15.458	15.458	15.458																																																				
60	15.452	15.452	15.451																																																				
—	—	—	—																																																				

COSEL

Model	LDA10F-15
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+15.0V 0.7A

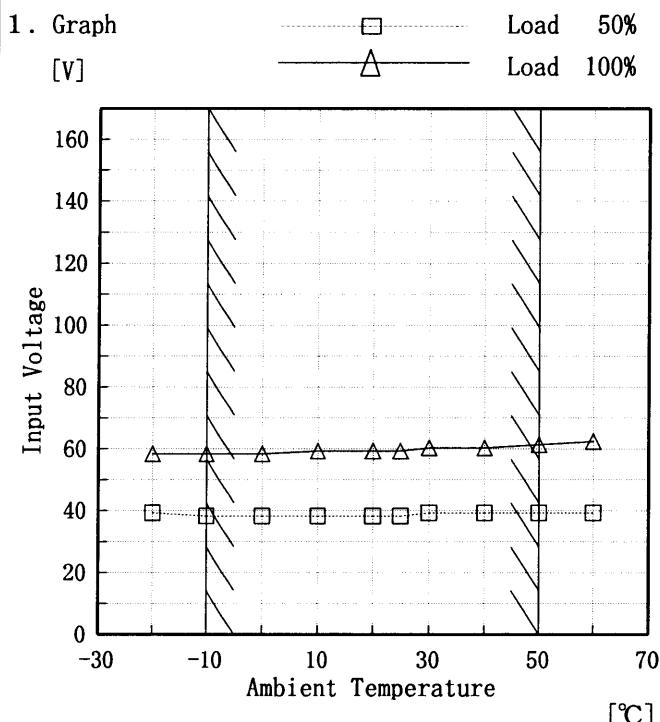

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	39	58
-10	38	58
0	38	58
10	38	59
20	38	59
25	38	59
30	39	60
40	39	60
50	39	61
60	39	62
—	—	—

COSEL

Model	LDA10F-15																																						
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																						
Object	+15.0V 0.7A																																						
1. Graph																																							
<p>Legend: □ Load 50% △ Load 100%</p> <p>Ambient Temperature [°C]</p> <p>Ripple Voltage [mV]</p> <p>Input Volt. 200 V</p>		2. Values																																					
<table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th> <th>Load 50% Ripple Output Volt. [mV]</th> <th>Load 100% Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>-20</td><td>20</td><td>40</td></tr> <tr><td>-10</td><td>10</td><td>20</td></tr> <tr><td>0</td><td>15</td><td>20</td></tr> <tr><td>10</td><td>15</td><td>10</td></tr> <tr><td>20</td><td>10</td><td>10</td></tr> <tr><td>25</td><td>10</td><td>10</td></tr> <tr><td>30</td><td>10</td><td>10</td></tr> <tr><td>40</td><td>10</td><td>10</td></tr> <tr><td>50</td><td>10</td><td>10</td></tr> <tr><td>60</td><td>10</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	20	40	-10	10	20	0	15	20	10	15	10	20	10	10	25	10	10	30	10	10	40	10	10	50	10	10	60	10	10	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																					
-20	20	40																																					
-10	10	20																																					
0	15	20																																					
10	15	10																																					
20	10	10																																					
25	10	10																																					
30	10	10																																					
40	10	10																																					
50	10	10																																					
60	10	10																																					
—	—	—																																					
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注)斜線は定格周囲温度範囲を示す。</p>																																							

COSEL

Model	LDA10F-15	Temperature Testing Circuitry	25°C Figure A																						
Item	Time Lapse Drift 経時ドリフト																								
Object	+15.0V 0.7A																								
1. Graph																									
<p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 200V Load 100%</p>																									
2. Values																									
<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15.459</td></tr> <tr><td>0.5</td><td>15.453</td></tr> <tr><td>1.0</td><td>15.454</td></tr> <tr><td>2.0</td><td>15.454</td></tr> <tr><td>3.0</td><td>15.453</td></tr> <tr><td>4.0</td><td>15.454</td></tr> <tr><td>5.0</td><td>15.454</td></tr> <tr><td>6.0</td><td>15.454</td></tr> <tr><td>7.0</td><td>15.454</td></tr> <tr><td>8.0</td><td>15.453</td></tr> </tbody> </table>				Time since start [H]	Output Voltage [V]	0.0	15.459	0.5	15.453	1.0	15.454	2.0	15.454	3.0	15.453	4.0	15.454	5.0	15.454	6.0	15.454	7.0	15.454	8.0	15.453
Time since start [H]	Output Voltage [V]																								
0.0	15.459																								
0.5	15.453																								
1.0	15.454																								
2.0	15.454																								
3.0	15.453																								
4.0	15.454																								
5.0	15.454																								
6.0	15.454																								
7.0	15.454																								
8.0	15.453																								



Model	LDA10F-15	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+15.0V 0.7A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~0.7 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 170~264 V

負荷電流 0~0.7 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	264	0.0	15.464		
Minimum Voltage	-10	264	0.7	15.452	±7	±0.1



Model	LDA10F-15		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+15.0V 0.7A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	15.46	Input Volt.: 200V, Load Current:0.7A
Line Regulation [mV]	3	Input Volt.: 170~264V, Load Current:0.7A
Load Regulation [mV]	5	Input Volt.: 200V, Load Current:0~0.7A



Model	LDA10F-15	Temperature	25°C
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	<hr/>		

1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	—	—	—
(B) IEC60950	—	—	—

2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.23	0.25	0.28



Model	LDA10F-15	Temperature Testing Circuitry	25°C Figure C
Item	Line Noise Tolerance 入力雑音耐量		
Object	+15.0V 0.7A		

1. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

2. Conditions

Input Voltage : 200 V
 Pulse Voltage : 2000 V
 Pulse Cycle : 10 mS
 Pulse Input Duration : 1 min. or more
 Load : 100 %

COSEL

Model	LDA10F-15	Temperature	25°C
Item	Conducted Emission 雜音端子電圧	Testing Circuitry	Figure D
Object	_____		

1. Graph


Remarks

Input Volt. 230 V

Load 100 %

規格1: [EN 55022] Class B(平均値)

規格2: [EN 55022] Class B(QP)

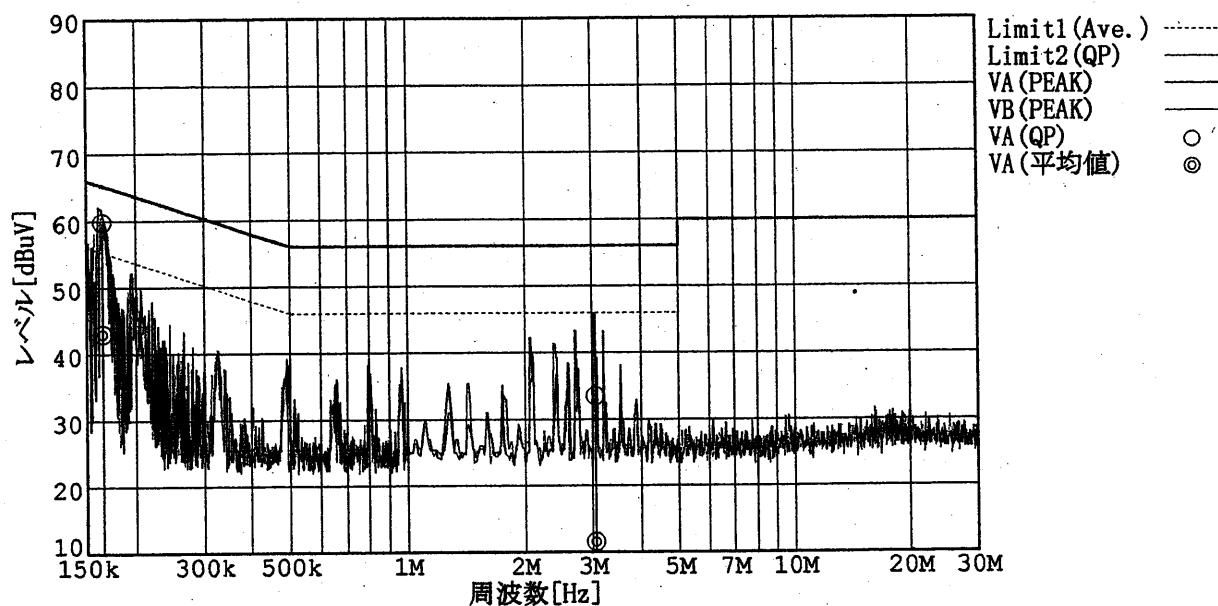

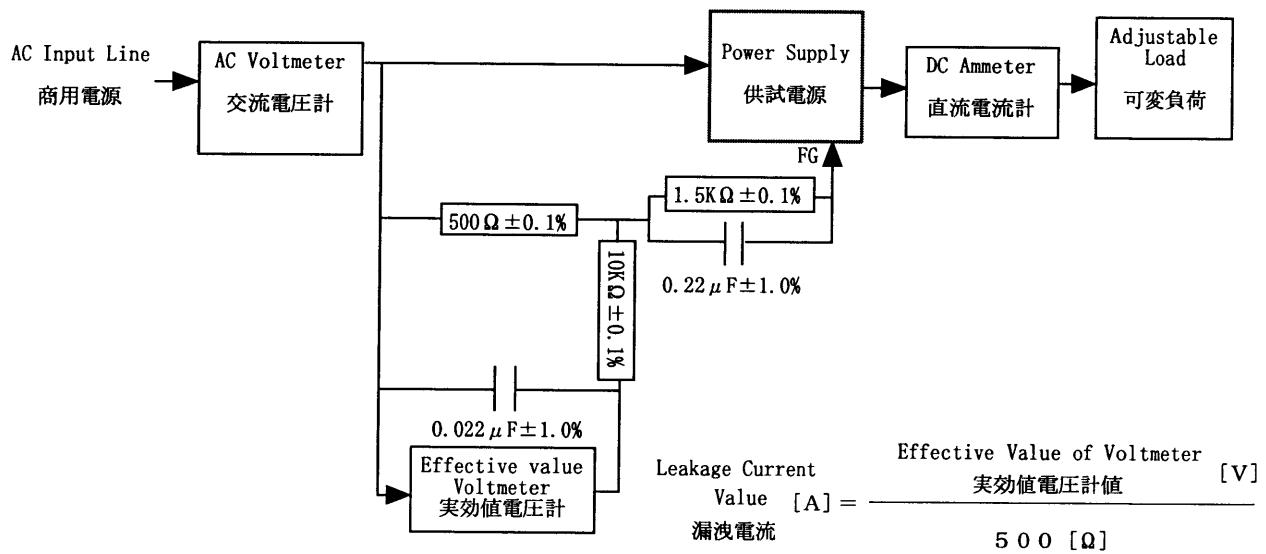
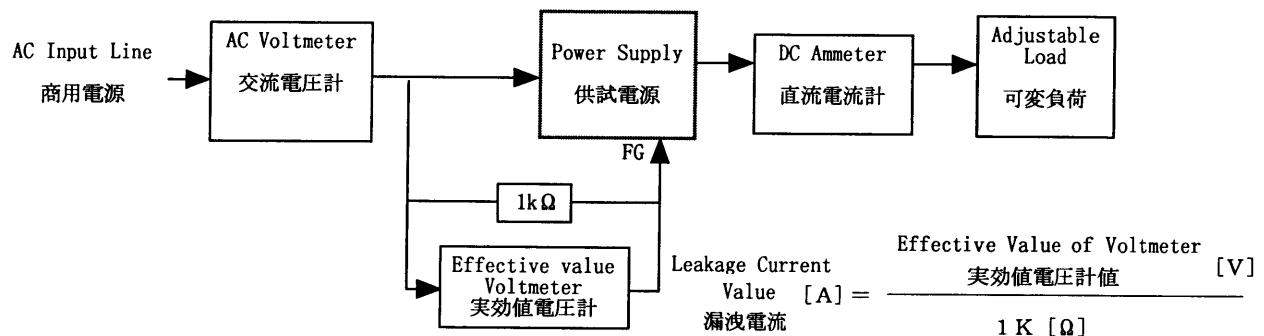
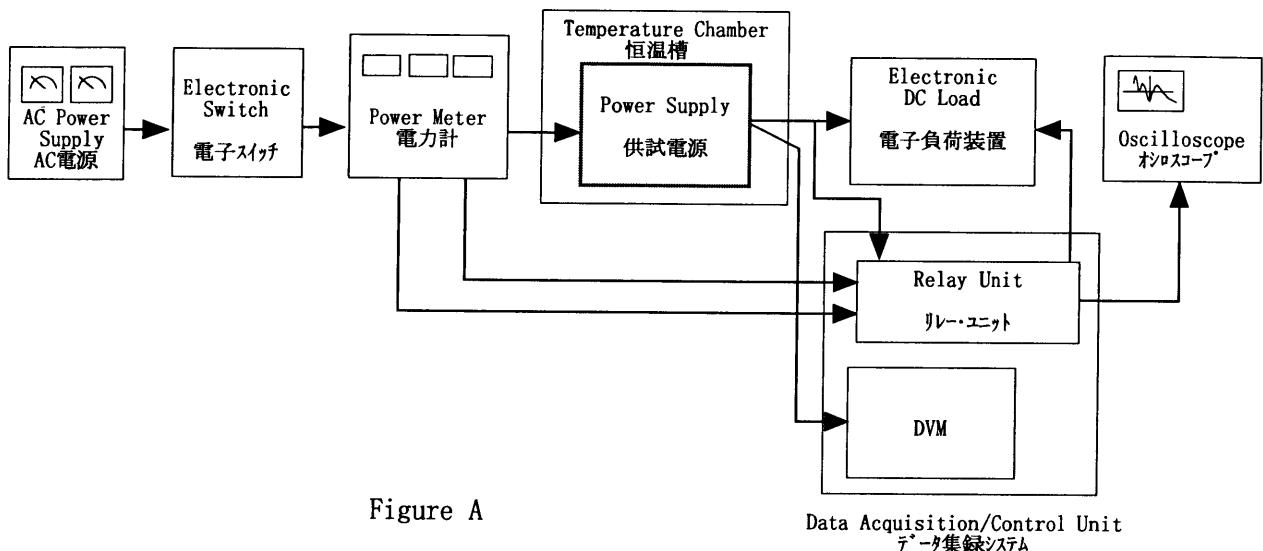


Figure B (IEC 60950)

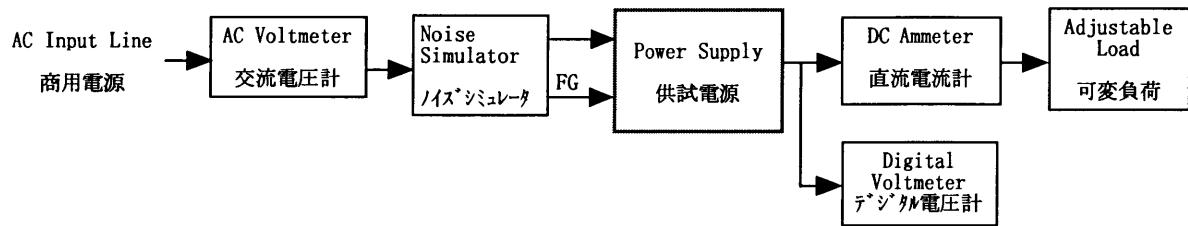


Figure C

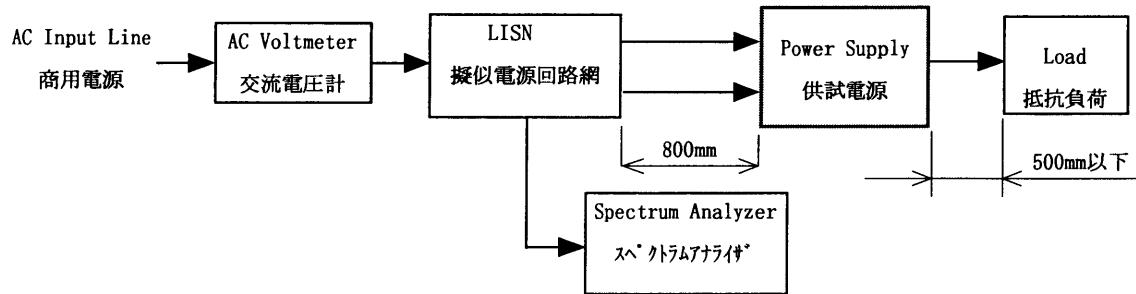


Figure D

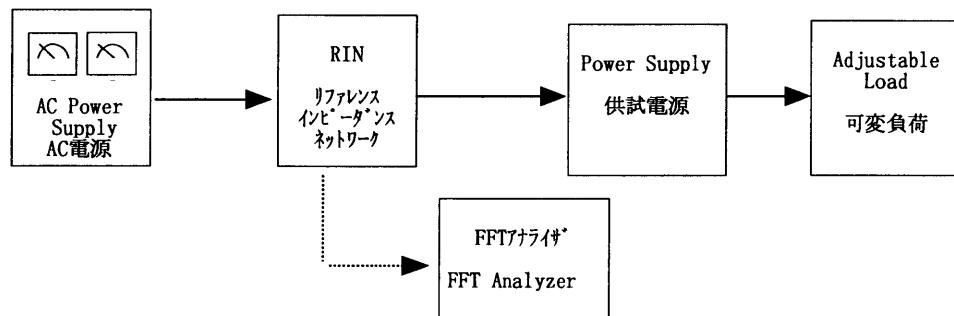


Figure E