
-200 -223

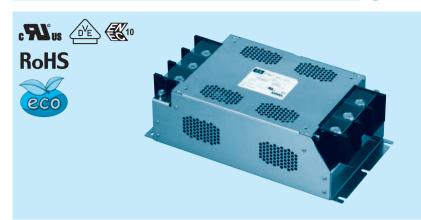

- ①Model Name ②Rated Current
- ③Line to ground capacitor code:See table 1.1.

table1.1 Line to ground capacitor code

Code	Leakage Current (Input 250/500V 60Hz)	Line to ground capacitor (nominal value)
103	1.0mA/2.0mA max	10,000pF
223	2.5mA/5.0mA max	22,000pF
333	3.5mA/7.0mA max	33,000pF

- \*When the line to ground capacitor code is different, the attenuation characteristic is
- 4 Option U:Improve differential mode attenuation (Rated voltage 250V)

# **Features of TAC series**

# High-attenuation type of common mode noise from 150kHz to 1MHz (1-stage filter)


- · Three phase rated voltage 500 VAC (voltage range:528V max)
- · Selectable leakage current value


# **Specifications**

No.	Items	TAC-200-223	TAC-250-223	TAC-300-223
1	Rated Voltage[V]	AC Three Phase 500 (voltage range:528 max) 50/60Hz *1		
2	Rated Current[A]	200	250	300
3	Test Voltage (Terminal-Mounting Plate)	2,500 VAC (Cutoff Current = 100mA), 1 minute at room temperature and humidity		
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 100M $\Omega$ min at room temperature and humidity		
5	Leakage current 250/500V 60Hz	2.5mA/5.0mA max		
6	DC resistance	2mΩ max	1.5mΩ max	1mΩ max
7	Safety agency approval temperatures	-25 to +85℃ (Refer to Derating Curve)		
8	Operating temperature	-40 to +85℃ (Refer to Derating Curve)		
9	Operating humidity	20 to 95%RH (Non condensing)		
10	Storage temperature/humidity	-40 to +85°C/20 to 95%RH (Non condensing)		
11	Vibration 10 to 55Hz, 19.6m/s² (2G), 3min. Period, 1hour each X, Y and Z axis			
12	npact 196.1m/s²(20G), 11ms Once each X, Y and Z axis			
13	Safety agency approvals	UL1283, CSA C22.2 No.8 (C-UL) , DIN EN60939 VDE0565 Teil3-1, ENEC		
14	Case size (without projection)	190×110×360 mm [7.48×4.33×14.17 inches] (W×H×D)		
15	Weight	8.0kg max		


<sup>\*1</sup> Only "TAC-\_\_\_-U", Three Phase 250 (275 max)

## **Circuit Diagram**

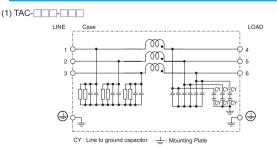

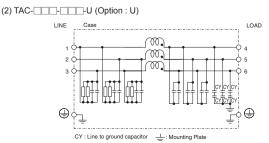


## **Derating Curve**

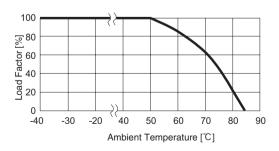

\*Keep free ventilation holes for cooling.

## **External view**

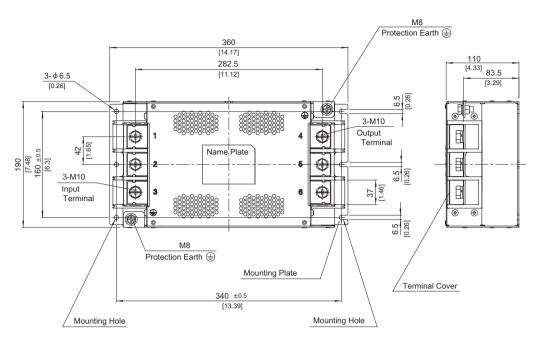

\* Can not be mounted upside-down. (mounted the top surface)

- % Tolerance : ±1 [±0.04]
- \* Weight: 8.0kg max
- Mounting Plate: Stainless steel t=2.0 [0.08]
- ※ Dimensions in mm, [ ]=inches
- \*\* Terminal block screw tightening torque M10 : 14.2N · m (144.9kgf · cm) max
- % Protection Earth screw tightening torque M8 : 9.2N  $\cdot$  m (93.9kgf  $\cdot$  cm) max