

Temperature increase of main components

Model: MGS1048□□

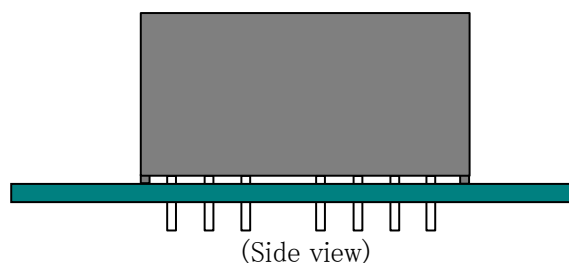
1. Conditions

- (1) Input :DC 48 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

Table 2.1 Temperature increase of main components								
No.	Parts name	Symbol No.	Increase (ΔT)				Rate d temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR11	43	41	42	38	150	Junction Temp.
2	Power control IC	IC11	44	42	42	37	150	Junction Temp.
3	Rectified MOS-FET(Output)	TR201	53	50	52	46	150	Junction Temp.
4	Photocoupler	PC11	44	42	42	37	125	Junction Temp.
5	Transformer (PCB)	P2	50	48	48	42	130	
6	CASE	CASE	46	42	44	37	105	Top Surface Center
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

Fig.1.1 Mounting method
(Normal position)