

Temperature increase of main components

Model: MGS1005□□

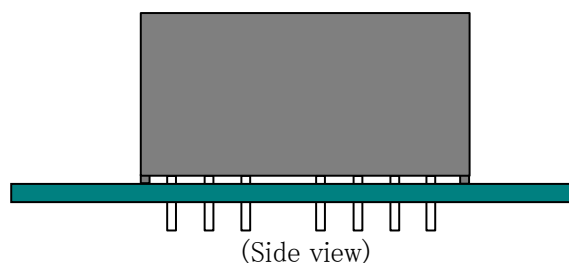
## 1. Conditions

- (1) Input :DC 5 [V]  
 (2) Output :Rated output  
 (3) Cooling method :Convection cooling  
 (4) Mounting method :Shown as Fig.1.1

## 2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase ( $\Delta T$ )				Rate d temp. [°C]	Reference
			[deg]					
			3.3V	5V	12V	15V		
1	Switching MOS-FET	TR11	65	67	63	61	150	Junction Temp.
2	Power control IC	IC11	54	53	50	48	150	Junction Temp.
3	Rectified MOS-FET(Output)	TR201	61	60	58	56	150	Junction Temp.
4	Photocoupler	PC11	54	53	50	48	125	Junction Temp.
5	Transformer (PCB)	P2	58	57	55	52	130	
6	CASE	CASE	55	54	53	51	105	Top Surface Center
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								

Fig.1.1 Mounting method  
(Normal position)