



# TEST DATA OF MGS10243R3

Regulated DC Power Supply  
July 21, 2016

Approved by : Takayuki Fukuda  
Takayuki Fukuda

Design Manager

Prepared by : Ryosuke Nakao  
Ryosuke Nakao

Design Engineer

**COSEL CO.,LTD.**




## CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Switching Frequency (by Load Current) . . . . .	18
19.Figure of Testing Circuitry . . . . .	19

(Final Page 19)

**COSEL**

Model	MGS10243R3
Item	Input Current (by Input Voltage)
Object	_____

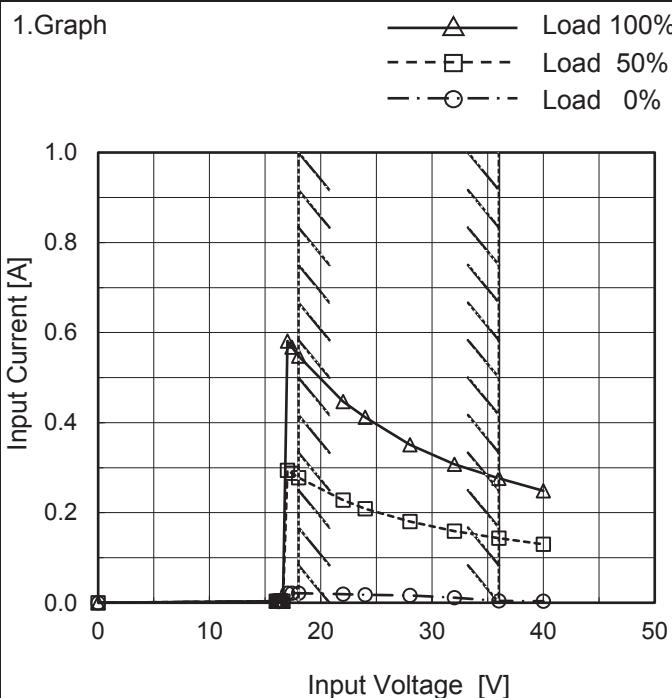

Note: Slanted line shows the range of the rated input voltage.


Temperature 25°C  
Testing Circuitry Figure A

## 2.Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0.0	0.000	0.000	0.000
16.0	0.003	0.003	0.003
16.2	0.003	0.003	0.004
16.4	0.004	0.004	0.003
16.6	0.003	0.003	0.003
17.0	0.021	0.294	0.581
17.4	0.022	0.287	0.568
18.0	0.021	0.278	0.548
22.0	0.019	0.228	0.447
24.0	0.017	0.209	0.412
28.0	0.016	0.180	0.351
32.0	0.011	0.159	0.307
36.0	0.004	0.143	0.276
40.0	0.003	0.130	0.249
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

**COSEL**

Model	MGS10243R3
Item	Input Current (by Load Current)
Object	_____

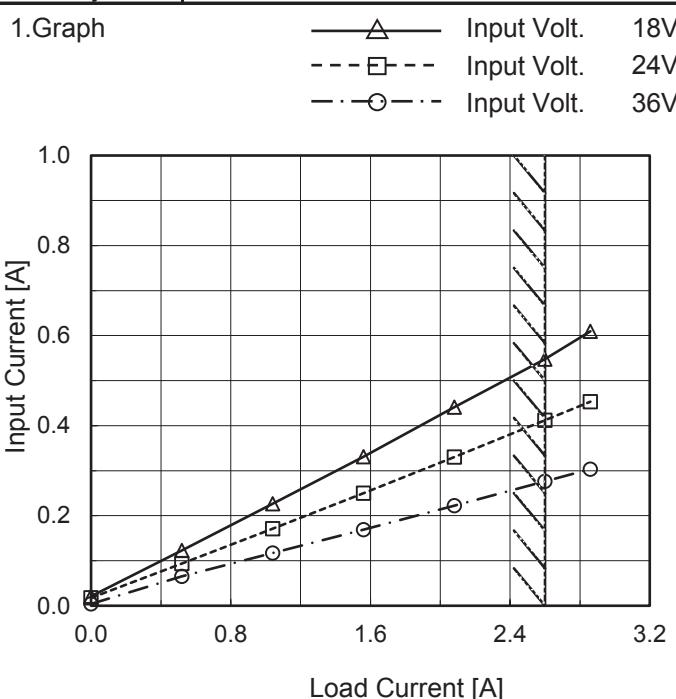
 Temperature 25°C  
 Testing Circuitry Figure A

## 2.Values

Load Current [A]	Input Current [A]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	0.021	0.017	0.004
0.52	0.123	0.094	0.065
1.04	0.227	0.171	0.117
1.56	0.331	0.250	0.169
2.08	0.441	0.331	0.223
2.60	0.548	0.412	0.276
2.86	0.610	0.453	0.303
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

**COSEL**

Model	MGS10243R3																																																					
Item	Input Power (by Load Current)																																																					
Object	_____																																																					
1.Graph	<p>—△— Input Volt. 18V - - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>18[V] [W]</th> <th>24[V] [W]</th> <th>36[V] [W]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.37</td><td>0.42</td><td>0.14</td></tr> <tr><td>0.52</td><td>2.20</td><td>2.25</td><td>2.34</td></tr> <tr><td>1.04</td><td>4.06</td><td>4.10</td><td>4.21</td></tr> <tr><td>1.56</td><td>5.96</td><td>5.98</td><td>6.09</td></tr> <tr><td>2.08</td><td>7.89</td><td>7.91</td><td>8.01</td></tr> <tr><td>2.60</td><td>9.87</td><td>9.86</td><td>9.93</td></tr> <tr><td>2.86</td><td>10.88</td><td>10.84</td><td>10.91</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	18[V] [W]	24[V] [W]	36[V] [W]	0.00	0.37	0.42	0.14	0.52	2.20	2.25	2.34	1.04	4.06	4.10	4.21	1.56	5.96	5.98	6.09	2.08	7.89	7.91	8.01	2.60	9.87	9.86	9.93	2.86	10.88	10.84	10.91	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-			
Load Current [A]	18[V] [W]	24[V] [W]	36[V] [W]																																																			
0.00	0.37	0.42	0.14																																																			
0.52	2.20	2.25	2.34																																																			
1.04	4.06	4.10	4.21																																																			
1.56	5.96	5.98	6.09																																																			
2.08	7.89	7.91	8.01																																																			
2.60	9.87	9.86	9.93																																																			
2.86	10.88	10.84	10.91																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.37</td><td>0.42</td><td>0.14</td></tr> <tr><td>0.52</td><td>2.20</td><td>2.25</td><td>2.34</td></tr> <tr><td>1.04</td><td>4.06</td><td>4.10</td><td>4.21</td></tr> <tr><td>1.56</td><td>5.96</td><td>5.98</td><td>6.09</td></tr> <tr><td>2.08</td><td>7.89</td><td>7.91</td><td>8.01</td></tr> <tr><td>2.60</td><td>9.87</td><td>9.86</td><td>9.93</td></tr> <tr><td>2.86</td><td>10.88</td><td>10.84</td><td>10.91</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.37	0.42	0.14	0.52	2.20	2.25	2.34	1.04	4.06	4.10	4.21	1.56	5.96	5.98	6.09	2.08	7.89	7.91	8.01	2.60	9.87	9.86	9.93	2.86	10.88	10.84	10.91	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.37	0.42	0.14																																																			
0.52	2.20	2.25	2.34																																																			
1.04	4.06	4.10	4.21																																																			
1.56	5.96	5.98	6.09																																																			
2.08	7.89	7.91	8.01																																																			
2.60	9.87	9.86	9.93																																																			
2.86	10.88	10.84	10.91																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

**COSEL**

Model	MGS10243R3																																	
Item	Efficiency (by Input Voltage)	Temperature 25°C Testing Circuitry Figure A																																
Object																																		
1.Graph																																		
<p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Legend: - - □ - - Load 50% — △ — Load 100%</p>																																		
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		
2.Values																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr> <td>17</td><td>86.6</td><td>87.4</td> </tr> <tr> <td>18</td><td>86.3</td><td>87.6</td> </tr> <tr> <td>20</td><td>86.4</td><td>87.6</td> </tr> <tr> <td>24</td><td>85.8</td><td>87.7</td> </tr> <tr> <td>30</td><td>85.3</td><td>87.5</td> </tr> <tr> <td>36</td><td>84.1</td><td>87.1</td> </tr> <tr> <td>40</td><td>83.1</td><td>86.8</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> <tr> <td>--</td><td>-</td><td>-</td> </tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	17	86.6	87.4	18	86.3	87.6	20	86.4	87.6	24	85.8	87.7	30	85.3	87.5	36	84.1	87.1	40	83.1	86.8	--	-	-	--	-	-
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
17	86.6	87.4																																
18	86.3	87.6																																
20	86.4	87.6																																
24	85.8	87.7																																
30	85.3	87.5																																
36	84.1	87.1																																
40	83.1	86.8																																
--	-	-																																
--	-	-																																

**COSEL**


Model	MGS10243R3	Temperature	25°C																																																			
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<p>The graph plots Efficiency [%] on the y-axis (55 to 95) against Load Current [A] on the x-axis (0.0 to 3.2). Three data series are shown: Input Volt. 18V (solid line with open triangle markers), Input Volt. 24V (dashed line with open square markers), and Input Volt. 36V (dash-dot line with open circle markers). All curves show efficiency increasing with load current, reaching a plateau around 87% efficiency. A slanted line on the graph indicates the range of the rated load current.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.52</td><td>78.6</td><td>76.7</td><td>73.9</td></tr> <tr><td>1.04</td><td>85.2</td><td>84.4</td><td>82.2</td></tr> <tr><td>1.56</td><td>87.2</td><td>86.8</td><td>85.2</td></tr> <tr><td>2.08</td><td>87.8</td><td>87.5</td><td>86.4</td></tr> <tr><td>2.60</td><td>87.6</td><td>87.7</td><td>87.1</td></tr> <tr><td>2.86</td><td>87.5</td><td>87.8</td><td>87.2</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	-	-	-	0.52	78.6	76.7	73.9	1.04	85.2	84.4	82.2	1.56	87.2	86.8	85.2	2.08	87.8	87.5	86.4	2.60	87.6	87.7	87.1	2.86	87.5	87.8	87.2	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	-	-	-																																																			
0.52	78.6	76.7	73.9																																																			
1.04	85.2	84.4	82.2																																																			
1.56	87.2	86.8	85.2																																																			
2.08	87.8	87.5	86.4																																																			
2.60	87.6	87.7	87.1																																																			
2.86	87.5	87.8	87.2																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

**COSEL**

Model	MGS10243R3
Item	Line Regulation
Object	+3.3V2.6A

 Temperature 25°C  
 Testing Circuitry Figure A

## 1.Graph

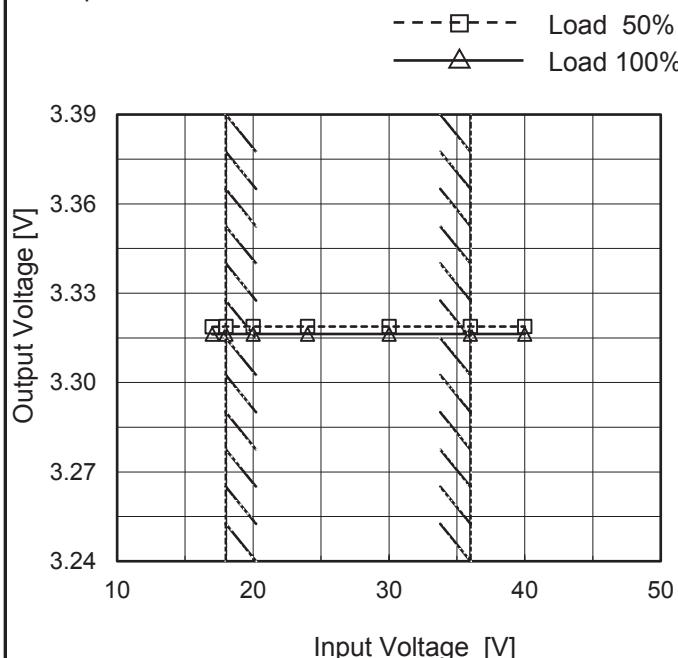

## 2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
17	3.319	3.316
18	3.319	3.316
20	3.319	3.316
24	3.319	3.316
30	3.319	3.316
36	3.319	3.316
40	3.319	3.316
--	-	-
--	-	-

Note: Slanted line shows the range of the rated input voltage.

**COSEL**




Model	MGS10243R3	Temperature	25°C																																																			
Item	Load Regulation	Testing Circuitry	Figure A																																																			
Object	+3.3V2.6A																																																					
1.Graph		2.Values																																																				
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>3.323</td><td>3.323</td><td>3.323</td></tr> <tr><td>0.52</td><td>3.321</td><td>3.321</td><td>3.321</td></tr> <tr><td>1.04</td><td>3.320</td><td>3.320</td><td>3.320</td></tr> <tr><td>1.56</td><td>3.319</td><td>3.319</td><td>3.319</td></tr> <tr><td>2.08</td><td>3.317</td><td>3.317</td><td>3.317</td></tr> <tr><td>2.60</td><td>3.316</td><td>3.316</td><td>3.316</td></tr> <tr><td>2.86</td><td>3.315</td><td>3.315</td><td>3.315</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	3.323	3.323	3.323	0.52	3.321	3.321	3.321	1.04	3.320	3.320	3.320	1.56	3.319	3.319	3.319	2.08	3.317	3.317	3.317	2.60	3.316	3.316	3.316	2.86	3.315	3.315	3.315	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	3.323	3.323	3.323																																																			
0.52	3.321	3.321	3.321																																																			
1.04	3.320	3.320	3.320																																																			
1.56	3.319	3.319	3.319																																																			
2.08	3.317	3.317	3.317																																																			
2.60	3.316	3.316	3.316																																																			
2.86	3.315	3.315	3.315																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						

**COSEL**

Model	MGS10243R3	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+3.3V2.6A		

Input Volt. 24 V  
 Cycle 100 ms

Temperature 25°C  
 Testing Circuitry Figure A

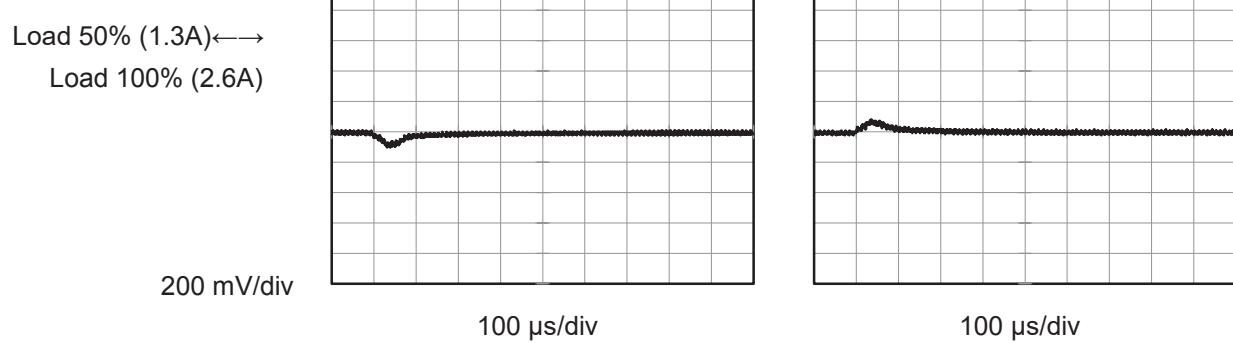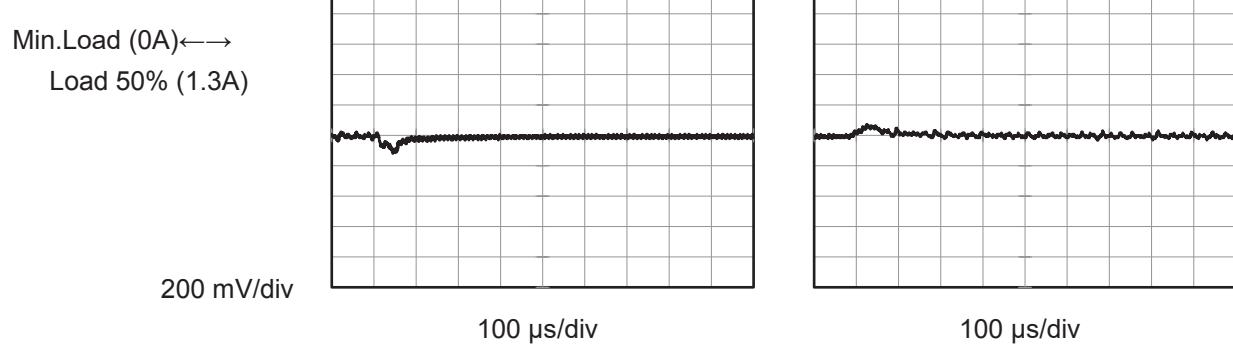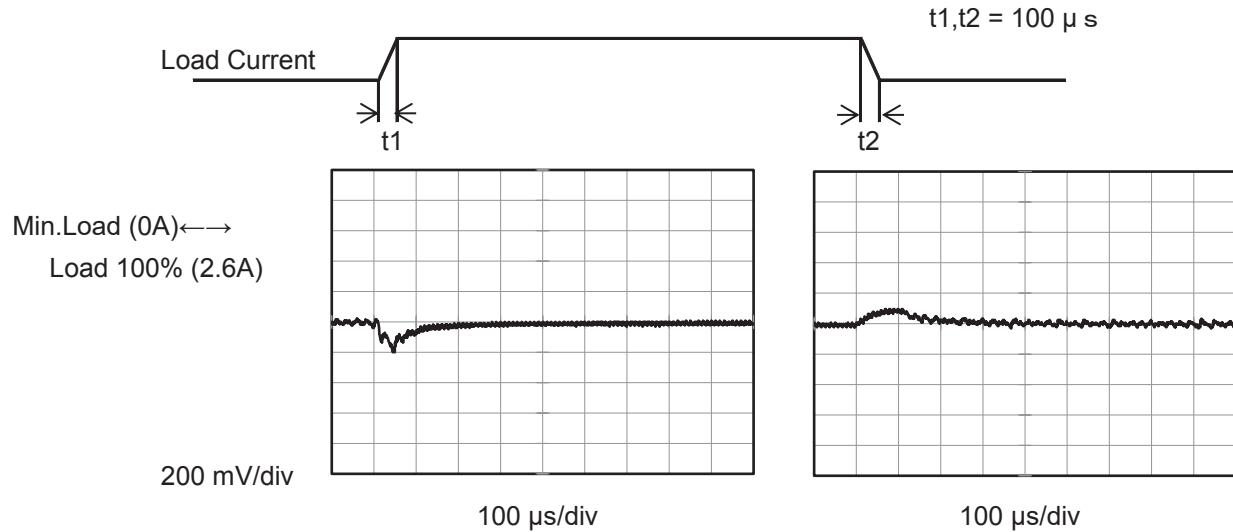

**COSSEL**


Model	MGS10243R3																																							
Item	Ripple Voltage (by Load Current)	Temperature 25°C Testing Circuitry Figure B																																						
Object	+3.3V2.6A																																							
1.Graph																																								
<p>Graph showing Ripple Voltage [mV] vs Load Current [A]. The Y-axis ranges from 0 to 300 mV, and the X-axis ranges from 0.0 to 3.2 A. Two curves are shown: a solid line for 18V and a dashed line for 36V. Both curves show a sharp increase in ripple voltage as load current increases beyond the rated value of approximately 2.6A. A slanted line indicates the range of the rated load current.</p>																																								
2.Values																																								
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>60</td> <td>35</td> </tr> <tr> <td>0.52</td> <td>5</td> <td>10</td> </tr> <tr> <td>1.04</td> <td>5</td> <td>5</td> </tr> <tr> <td>1.56</td> <td>5</td> <td>10</td> </tr> <tr> <td>2.08</td> <td>5</td> <td>10</td> </tr> <tr> <td>2.60</td> <td>10</td> <td>10</td> </tr> <tr> <td>2.86</td> <td>15</td> <td>10</td> </tr> <tr> <td>--</td> <td>-</td> <td>-</td> </tr> </tbody> </table>			Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.00	60	35	0.52	5	10	1.04	5	5	1.56	5	10	2.08	5	10	2.60	10	10	2.86	15	10	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.00	60	35																																						
0.52	5	10																																						
1.04	5	5																																						
1.56	5	10																																						
2.08	5	10																																						
2.60	10	10																																						
2.86	15	10																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
--	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig.Complex Ripple Wave Form</p>																																								

**COSEL**

Model	MGS10243R3
Item	Ripple-Noise
Object	+3.3V2.6A

Temperature 25°C  
Testing Circuitry Figure B

## 1.Graph

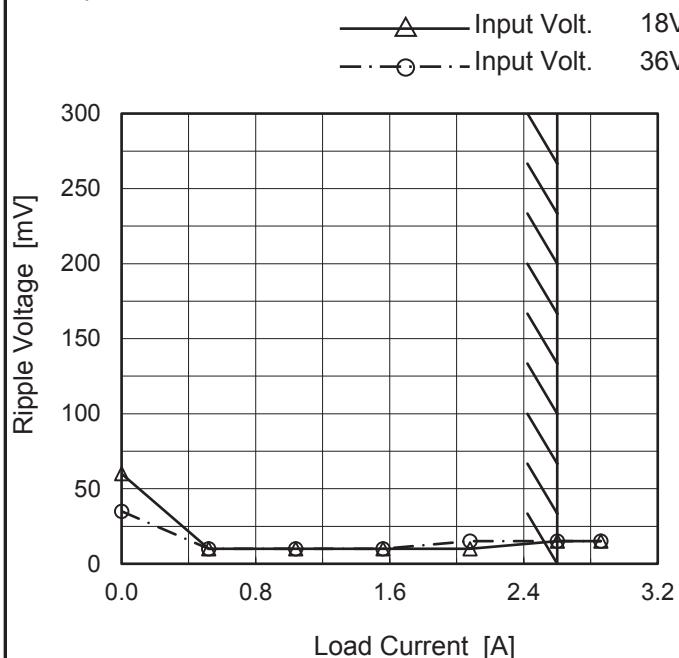

## 2.Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.00	60	35
0.52	10	10
1.04	10	10
1.56	10	10
2.08	10	15
2.60	15	15
2.86	15	15
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple Noise[mVp-p]


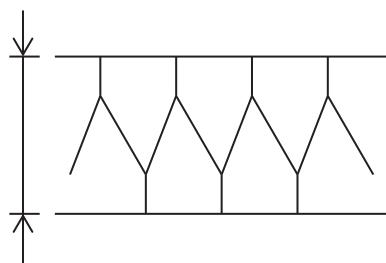


Fig.Complex Ripple Noise Wave Form

**COSEL**

Model	MGS10243R3
Item	Ripple Voltage (by Ambient Temp.)
Object	+3.3V2.6A

## 1. Graph

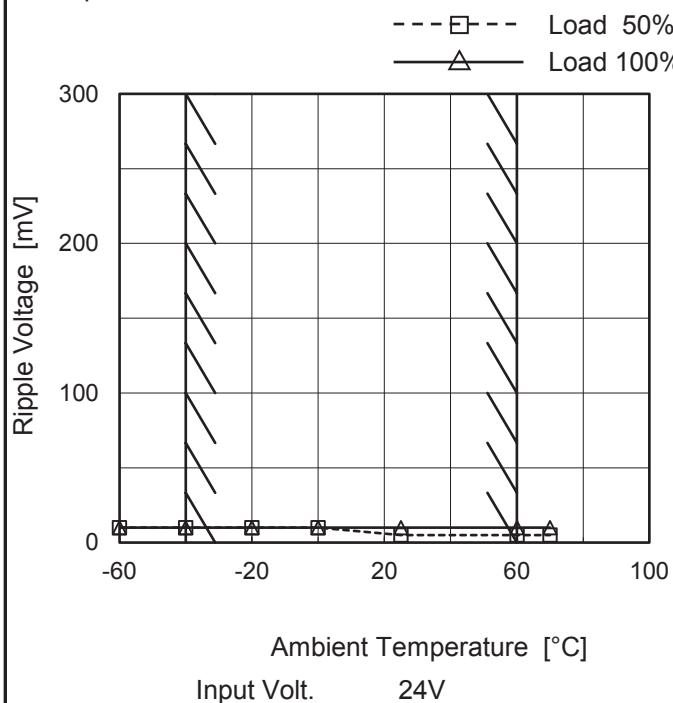

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.


Testing Circuitry Figure B

## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	10	10
-40	10	10
-20	10	10
0	10	10
25	5	10
60	5	10
70	5	10
--	-	-
--	-	-
--	-	-
--	-	-

**COSEL**

Model	MGS10243R3
Item	Ambient Temperature Drift
Object	+3.3V2.6A

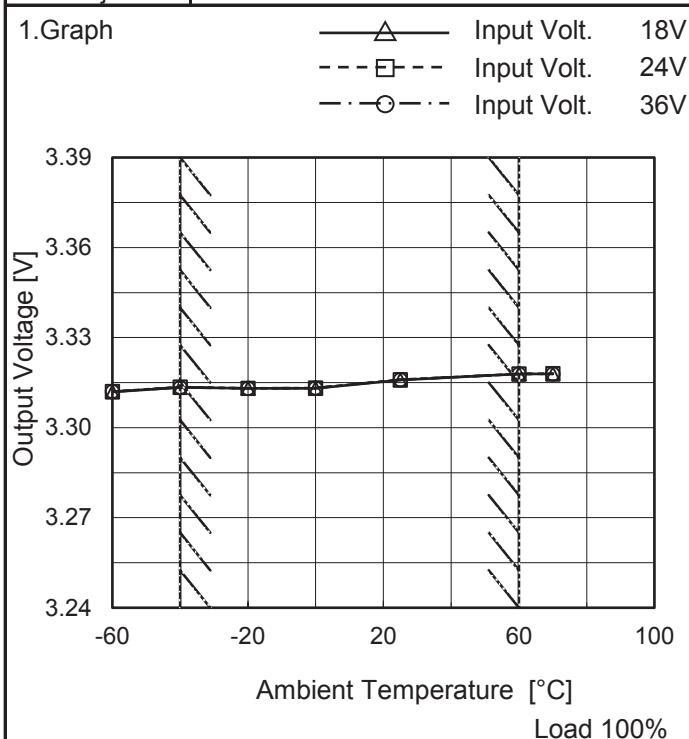

Testing Circuitry Figure A

## 2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-60	3.312	3.312	3.312
-40	3.313	3.314	3.313
-20	3.313	3.313	3.313
0	3.313	3.313	3.313
25	3.316	3.316	3.316
60	3.318	3.318	3.318
70	3.318	3.318	3.318
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated ambient temperature.



Model	MGS10243R3	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+3.3V2.6A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 60°C

Input Voltage : 18 - 36V

Load Current : 0 - 2.6A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 2. Values


Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	60	36	0	3.325	$\pm 6$	$\pm 0.2$
Minimum Voltage	-20	36	2.6	3.313		

**COSEL**

Model	MGS10243R3
Item	Time Lapse Drift
Object	+3.3V2.6A

 Temperature 25°C  
 Testing Circuitry Figure A

## 1.Graph

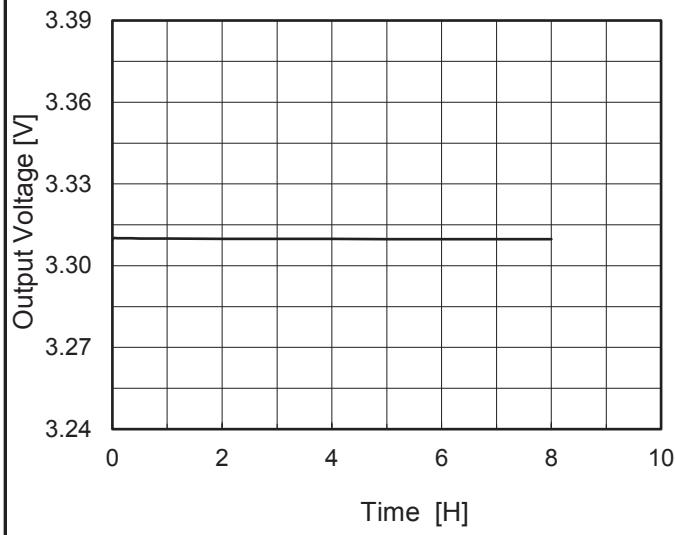

## 2.Values


Time since start [H]	Output Voltage [V]
0.0	3.310
0.5	3.310
1.0	3.310
2.0	3.310
3.0	3.310
4.0	3.310
5.0	3.310
6.0	3.310
7.0	3.310
8.0	3.310

**COSEL**

Model	MGS10243R3
Item	Rise and Fall Time
Object	+3.3V2.6A


Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

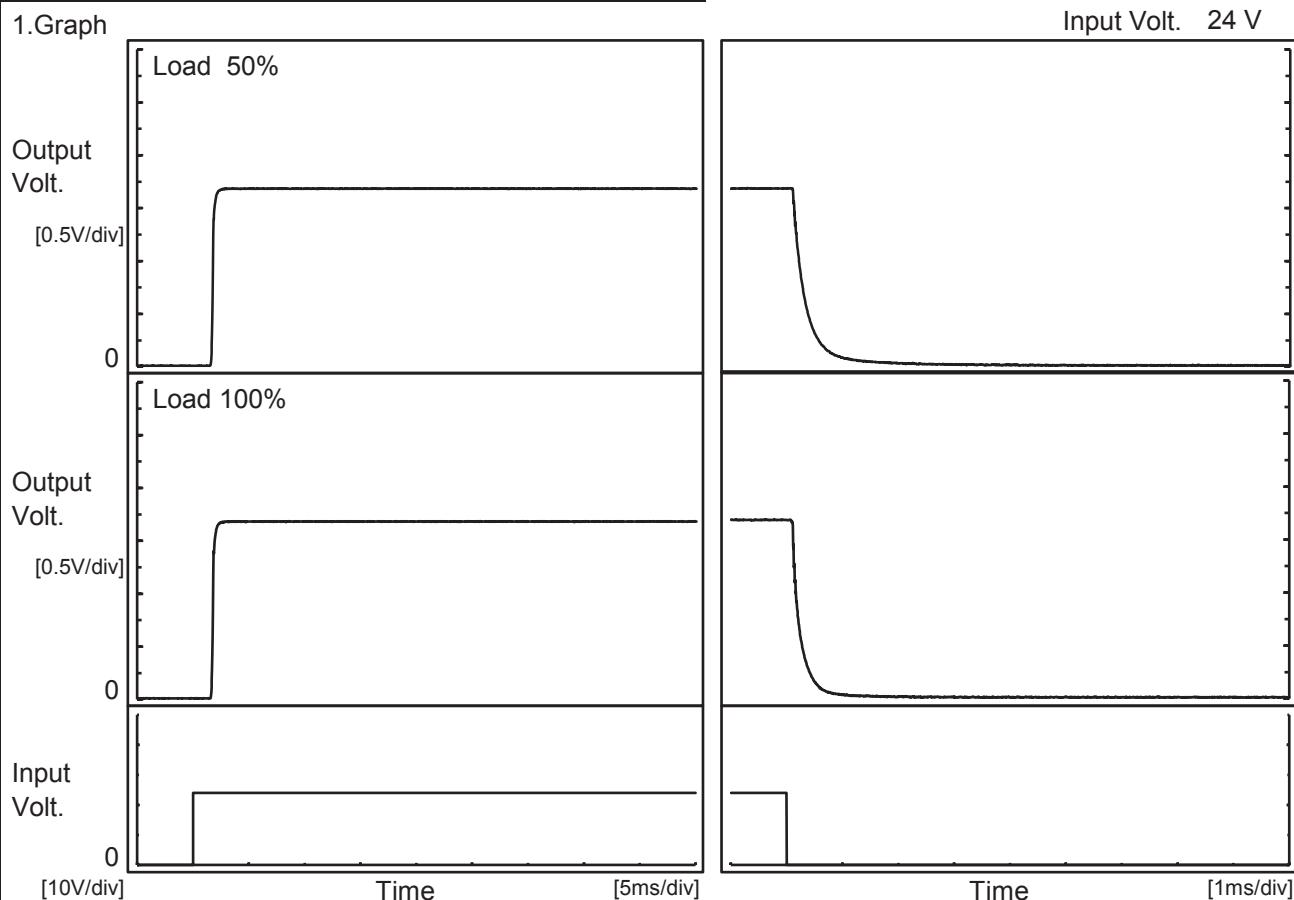

## 2. Values


Load	Time	Td	Tr	Ts	Th	Tf
50 %	[5ms/div]	1.7	0.3	2.0	0.1	0.6
100 %	[5ms/div]	1.7	0.3	2.0	0.1	0.4

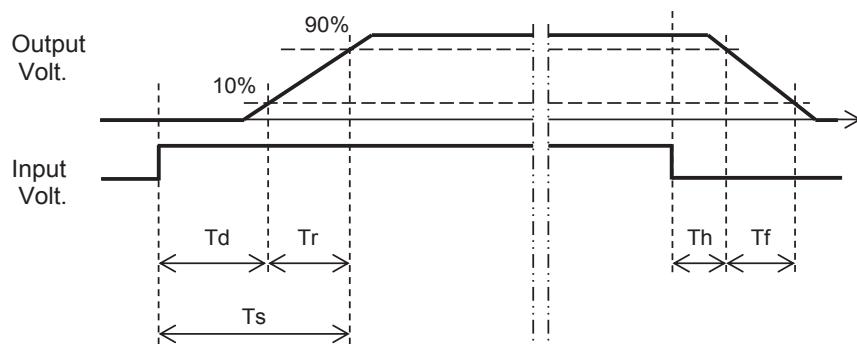

**COSEL**

Model	MGS10243R3
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+3.3V2.6A

## 1. Graph

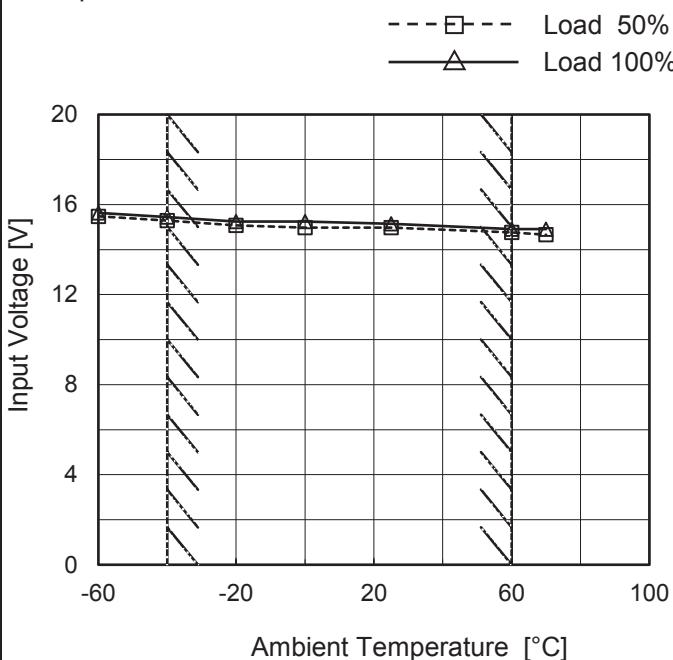

Note: Slanted line shows the range of the rated ambient temperature.


## Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	15.5	15.7
-40	15.3	15.5
-20	15.1	15.3
0	15.0	15.3
25	15.0	15.2
60	14.8	15.0
70	14.7	15.0
--	-	-
--	-	-
--	-	-
--	-	-

**COSEL**

Model	MGS10243R3
Item	Overcurrent Protection
Object	+3.3V2.6A

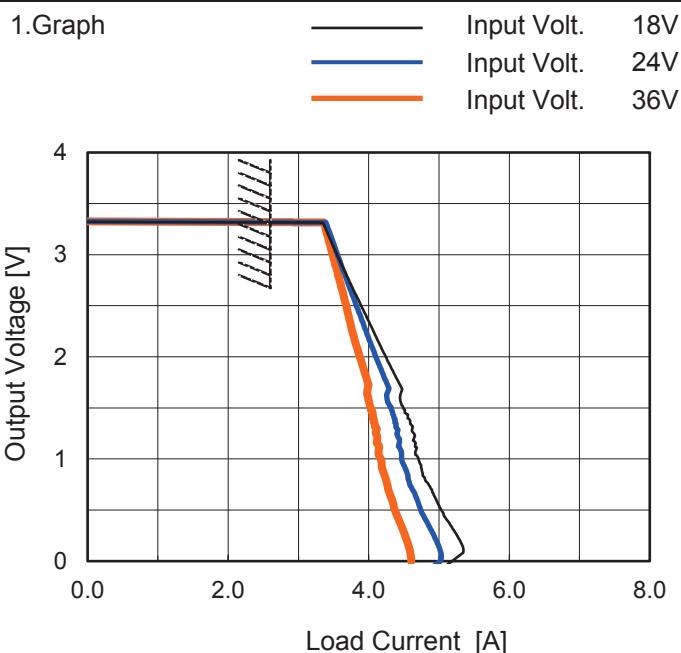

Note: Slanted line shows the range of the rated load current.

Temperature 25°C  
Testing Circuitry Figure A

2.Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
3.30	2.60	2.60	2.61
3.14	3.46	3.49	3.43
2.97	3.57	3.57	3.50
2.64	3.79	3.74	3.63
2.31	4.01	3.93	3.74
1.98	4.25	4.11	3.88
1.65	4.48	4.29	3.98
1.32	4.61	4.39	4.09
0.99	4.71	4.47	4.17
0.66	4.92	4.65	4.29
0.33	5.17	4.87	4.47
0.00	4.94	4.60	4.60

**COSEL**

Model	MGS10243R3	Temperature	25°C																																																				
Item	Switching Frequency (by Load Current)	Testing Circuitry	Figure A																																																				
Object	+3.3V2.6A																																																						
1.Graph	<p>—△— Input Volt. 18V        - - - □ - - Input Volt. 24V        - - ○ - - Input Volt. 36V</p> <table border="1"> <caption>Data points estimated from Figure A graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>18[V] [kHz]</th> <th>24[V] [kHz]</th> <th>36[V] [kHz]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>787</td><td>895</td><td>1020</td></tr> <tr><td>0.52</td><td>619</td><td>701</td><td>777</td></tr> <tr><td>1.04</td><td>452</td><td>527</td><td>611</td></tr> <tr><td>1.56</td><td>358</td><td>425</td><td>500</td></tr> <tr><td>2.08</td><td>296</td><td>355</td><td>425</td></tr> <tr><td>2.60</td><td>252</td><td>305</td><td>369</td></tr> <tr><td>2.86</td><td>234</td><td>284</td><td>346</td></tr> </tbody> </table>				Load Current [A]	18[V] [kHz]	24[V] [kHz]	36[V] [kHz]	0.00	787	895	1020	0.52	619	701	777	1.04	452	527	611	1.56	358	425	500	2.08	296	355	425	2.60	252	305	369	2.86	234	284	346																			
Load Current [A]	18[V] [kHz]	24[V] [kHz]	36[V] [kHz]																																																				
0.00	787	895	1020																																																				
0.52	619	701	777																																																				
1.04	452	527	611																																																				
1.56	358	425	500																																																				
2.08	296	355	425																																																				
2.60	252	305	369																																																				
2.86	234	284	346																																																				
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Frequency [kHz]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>787</td><td>895</td><td>1020</td></tr> <tr><td>0.52</td><td>619</td><td>701</td><td>777</td></tr> <tr><td>1.04</td><td>452</td><td>527</td><td>611</td></tr> <tr><td>1.56</td><td>358</td><td>425</td><td>500</td></tr> <tr><td>2.08</td><td>296</td><td>355</td><td>425</td></tr> <tr><td>2.60</td><td>252</td><td>305</td><td>369</td></tr> <tr><td>2.86</td><td>234</td><td>284</td><td>346</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Frequency [kHz]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	787	895	1020	0.52	619	701	777	1.04	452	527	611	1.56	358	425	500	2.08	296	355	425	2.60	252	305	369	2.86	234	284	346	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Frequency [kHz]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
0.00	787	895	1020																																																				
0.52	619	701	777																																																				
1.04	452	527	611																																																				
1.56	358	425	500																																																				
2.08	296	355	425																																																				
2.60	252	305	369																																																				
2.86	234	284	346																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
Note:	Slanted line shows the range of the rated load current.																																																						
-When load current is low, MG operates intermittently, so switching frequency would not become constant.																																																							

COSEL

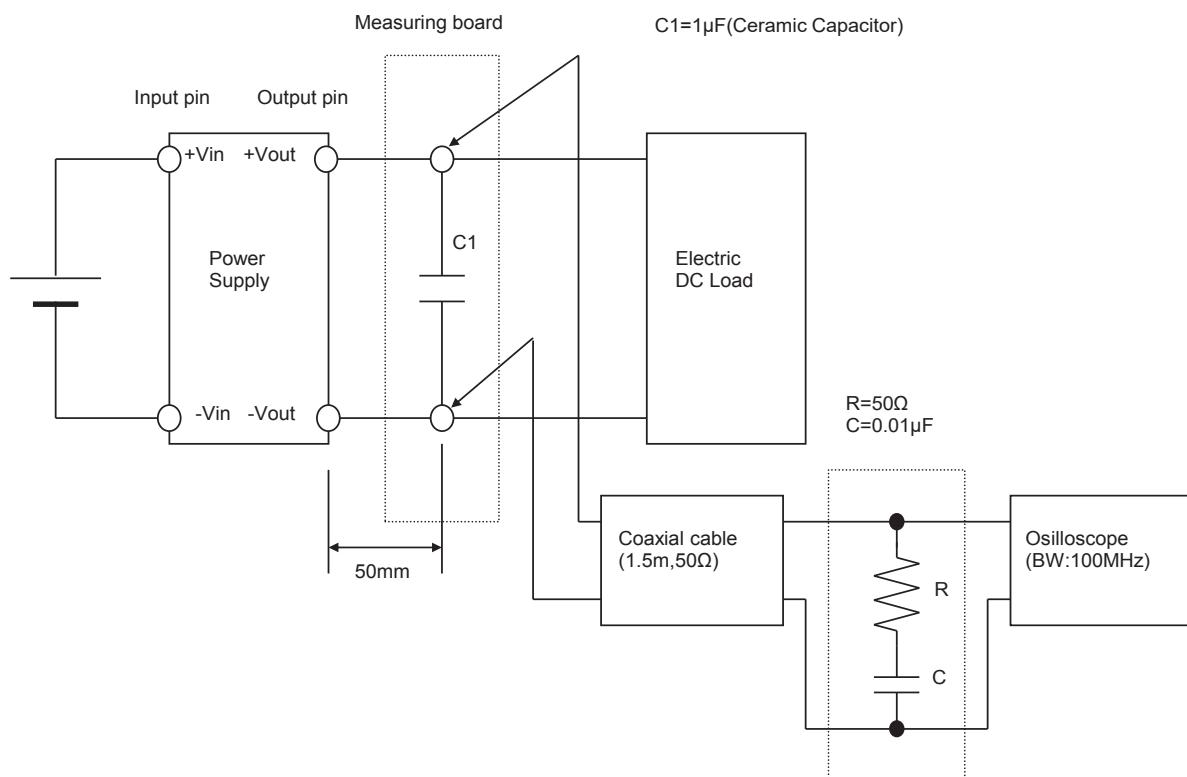
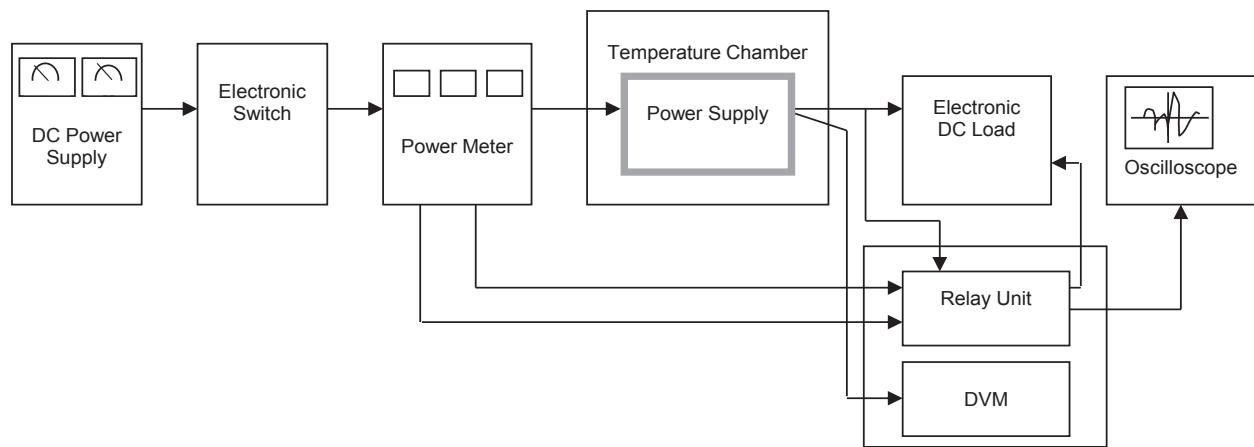


Figure B (Ripple and Ripple noise Characteristic)