



# TEST DATA OF MGS3053R3

Regulated DC Power Supply  
March 25, 2016

Approved by : Takayuki Fukuda \_\_\_\_\_  
Takayuki Fukuda Design Manager

Prepared by : Shohei Mukaiide \_\_\_\_\_  
Shohei Mukaiide Design Engineer

**COSEL CO.,LTD.**



## CONTENTS

1.Input Current (by Input Voltage) . . . . .	1
2.Input Current (by Load Current) . . . . .	2
3.Input Power (by Load Current) . . . . .	3
4.Efficiency (by Input Voltage) . . . . .	4
5.Efficiency (by Load Current) . . . . .	5
6.Line Regulation . . . . .	6
7.Load Regulation . . . . .	7
8.Dynamic Load Response . . . . .	8
9.Ripple Voltage (by Load Current) . . . . .	9
10.Ripple-Noise . . . . .	10
11.Ripple Voltage (by Ambient Temperature) . . . . .	11
12.Ambient Temperature Drift . . . . .	12
13.Output Voltage Accuracy . . . . .	13
14.Time Lapse Drift . . . . .	14
15.Rise and Fall Time . . . . .	15
16.Minimum Input Voltage for Regulated Output Voltage . . . . .	16
17.Overcurrent Protection . . . . .	17
18.Switching Frequency (by Load Current) . . . . .	18
19.Figure of Testing Circuitry . . . . .	19

(Final Page 19)

**COSEL**


Model	MGS3053R3																																																																																	
Item	Input Current (by Input Voltage)	Temperature Testing Circuitry	25°C Figure A																																																																															
Object																																																																																		
1.Graph																																																																																		
<p>Input Current [A]</p> <p>Input Voltage [V]</p> <p>Legend:</p> <ul style="list-style-type: none"> <li>Load 100% (△)</li> <li>Load 50% (□)</li> <li>Load 0% (○)</li> </ul>																																																																																		
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																																																																		
2.Values																																																																																		
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>3.0</td><td>0.002</td><td>0.001</td><td>0.002</td></tr> <tr><td>3.7</td><td>0.002</td><td>0.003</td><td>0.003</td></tr> <tr><td>3.8</td><td>0.002</td><td>0.003</td><td>0.003</td></tr> <tr><td>3.9</td><td>0.003</td><td>0.003</td><td>0.003</td></tr> <tr><td>4.0</td><td>0.003</td><td>0.002</td><td>0.003</td></tr> <tr><td>4.2</td><td>0.012</td><td>0.405</td><td>0.852</td></tr> <tr><td>4.5</td><td>0.011</td><td>0.381</td><td>0.773</td></tr> <tr><td>5.0</td><td>0.009</td><td>0.339</td><td>0.688</td></tr> <tr><td>6.0</td><td>0.008</td><td>0.282</td><td>0.565</td></tr> <tr><td>7.0</td><td>0.005</td><td>0.243</td><td>0.480</td></tr> <tr><td>8.0</td><td>0.005</td><td>0.214</td><td>0.419</td></tr> <tr><td>9.0</td><td>0.005</td><td>0.194</td><td>0.375</td></tr> <tr><td>10.0</td><td>0.006</td><td>0.177</td><td>0.338</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0.0	0.000	0.000	0.000	3.0	0.002	0.001	0.002	3.7	0.002	0.003	0.003	3.8	0.002	0.003	0.003	3.9	0.003	0.003	0.003	4.0	0.003	0.002	0.003	4.2	0.012	0.405	0.852	4.5	0.011	0.381	0.773	5.0	0.009	0.339	0.688	6.0	0.008	0.282	0.565	7.0	0.005	0.243	0.480	8.0	0.005	0.214	0.419	9.0	0.005	0.194	0.375	10.0	0.006	0.177	0.338	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Input Voltage [V]	Input Current [A]																																																																																	
	Load 0%	Load 50%	Load 100%																																																																															
0.0	0.000	0.000	0.000																																																																															
3.0	0.002	0.001	0.002																																																																															
3.7	0.002	0.003	0.003																																																																															
3.8	0.002	0.003	0.003																																																																															
3.9	0.003	0.003	0.003																																																																															
4.0	0.003	0.002	0.003																																																																															
4.2	0.012	0.405	0.852																																																																															
4.5	0.011	0.381	0.773																																																																															
5.0	0.009	0.339	0.688																																																																															
6.0	0.008	0.282	0.565																																																																															
7.0	0.005	0.243	0.480																																																																															
8.0	0.005	0.214	0.419																																																																															
9.0	0.005	0.194	0.375																																																																															
10.0	0.006	0.177	0.338																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															
--	-	-	-																																																																															

**COSEL**

Model	MGS3053R3	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object																																																						
1.Graph	<p>—△— Input Volt. 4.5V        - - -□- - Input Volt. 5V        - - ○ - - Input Volt. 9V</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Input Volt. 4.5V [A]</th> <th>Input Volt. 5V [A]</th> <th>Input Volt. 9V [A]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.011</td><td>0.009</td><td>0.005</td></tr> <tr><td>0.16</td><td>0.156</td><td>0.142</td><td>0.090</td></tr> <tr><td>0.32</td><td>0.297</td><td>0.268</td><td>0.157</td></tr> <tr><td>0.48</td><td>0.447</td><td>0.400</td><td>0.227</td></tr> <tr><td>0.64</td><td>0.606</td><td>0.540</td><td>0.298</td></tr> <tr><td>0.80</td><td>0.773</td><td>0.688</td><td>0.372</td></tr> <tr><td>0.88</td><td>0.861</td><td>0.763</td><td>0.410</td></tr> </tbody> </table>			Load Current [A]	Input Volt. 4.5V [A]	Input Volt. 5V [A]	Input Volt. 9V [A]	0.00	0.011	0.009	0.005	0.16	0.156	0.142	0.090	0.32	0.297	0.268	0.157	0.48	0.447	0.400	0.227	0.64	0.606	0.540	0.298	0.80	0.773	0.688	0.372	0.88	0.861	0.763	0.410																			
Load Current [A]	Input Volt. 4.5V [A]	Input Volt. 5V [A]	Input Volt. 9V [A]																																																			
0.00	0.011	0.009	0.005																																																			
0.16	0.156	0.142	0.090																																																			
0.32	0.297	0.268	0.157																																																			
0.48	0.447	0.400	0.227																																																			
0.64	0.606	0.540	0.298																																																			
0.80	0.773	0.688	0.372																																																			
0.88	0.861	0.763	0.410																																																			
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.011</td><td>0.009</td><td>0.005</td></tr> <tr><td>0.16</td><td>0.156</td><td>0.142</td><td>0.090</td></tr> <tr><td>0.32</td><td>0.297</td><td>0.268</td><td>0.157</td></tr> <tr><td>0.48</td><td>0.447</td><td>0.400</td><td>0.227</td></tr> <tr><td>0.64</td><td>0.606</td><td>0.540</td><td>0.298</td></tr> <tr><td>0.80</td><td>0.773</td><td>0.688</td><td>0.372</td></tr> <tr><td>0.88</td><td>0.861</td><td>0.763</td><td>0.410</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.011	0.009	0.005	0.16	0.156	0.142	0.090	0.32	0.297	0.268	0.157	0.48	0.447	0.400	0.227	0.64	0.606	0.540	0.298	0.80	0.773	0.688	0.372	0.88	0.861	0.763	0.410	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.011	0.009	0.005																																																			
0.16	0.156	0.142	0.090																																																			
0.32	0.297	0.268	0.157																																																			
0.48	0.447	0.400	0.227																																																			
0.64	0.606	0.540	0.298																																																			
0.80	0.773	0.688	0.372																																																			
0.88	0.861	0.763	0.410																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note:	Slanted line shows the range of the rated load current.																																																					

**COSEL**

Model	MGS3053R3
Item	Input Power (by Load Current)
Object	

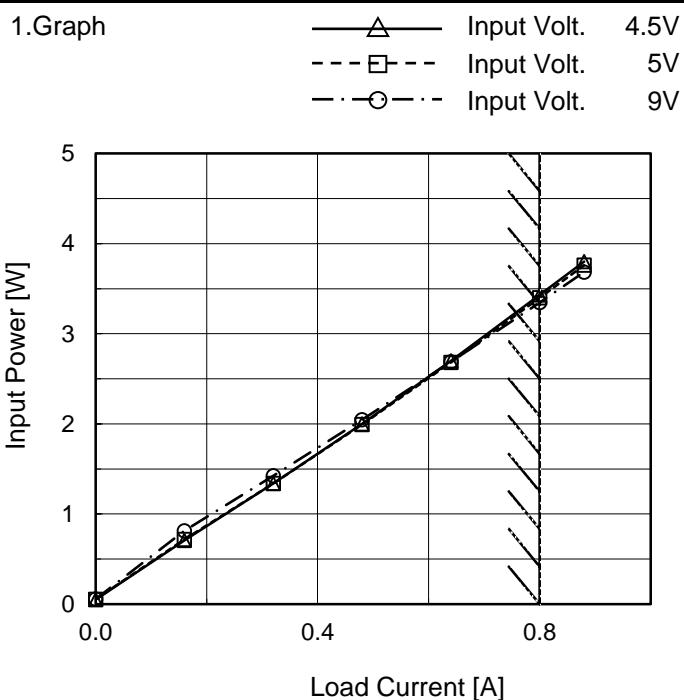

Note: Slanted line shows the range of the rated load current.

Temperature 25°C  
Testing Circuitry Figure A

## 2.Values

Load Current [A]	Input Power [W]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	0.05	0.05	0.06
0.16	0.71	0.72	0.81
0.32	1.34	1.34	1.42
0.48	2.00	1.99	2.04
0.64	2.70	2.68	2.69
0.80	3.43	3.40	3.35
0.88	3.80	3.76	3.69
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


**COSEL**

Model MGS3053R3

Item Efficiency (by Input Voltage)

Object \_\_\_\_\_

## 1.Graph

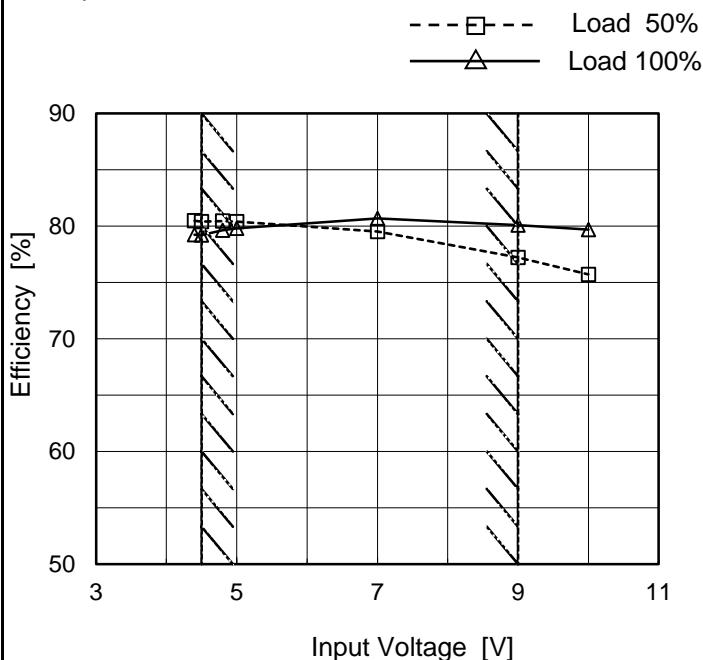

Note: Slanted line shows the range of the rated input voltage.

 Temperature 25°C  
 Testing Circuitry Figure A

## 2.Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
4.4	80.5	79.2
4.5	80.4	79.2
4.8	80.5	79.6
5.0	80.4	79.8
7.0	79.5	80.7
9.0	77.2	80.1
10.0	75.7	79.7
--	-	-
--	-	-

# COSEL


Model MGS3053R3

Item Efficiency (by Load Current)

Object \_\_\_\_\_

1.Graph

—△— Input Volt. 4.5V  
 - - -□--- Input Volt. 5V  
 - - ○ - - Input Volt. 9V

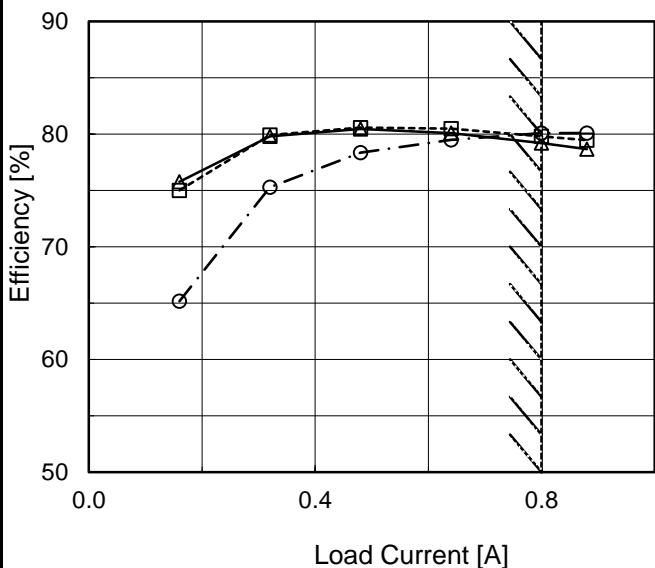

Note: Slanted line shows the range of the rated load current.

Temperature 25°C  
 Testing Circuitry Figure A

2.Values

Load Current [A]	Efficiency [%]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	-	-	-
0.16	75.8	75.0	65.2
0.32	79.8	79.9	75.3
0.48	80.5	80.6	78.3
0.64	80.1	80.5	79.5
0.80	79.2	79.8	80.1
0.88	78.7	79.5	80.1
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

**COSEL**


Model MGS3053R3

Item Line Regulation

Object +3.3V0.8A

Temperature 25°C  
Testing Circuitry Figure A

## 1.Graph

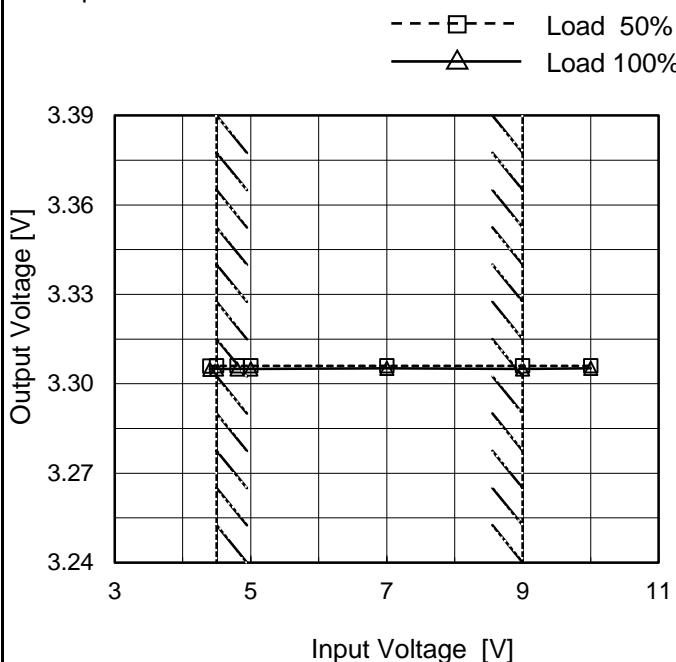


## 2.Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
4.4	3.306	3.305
4.5	3.306	3.305
4.8	3.306	3.305
5.0	3.306	3.305
7.0	3.306	3.305
9.0	3.306	3.305
10.0	3.306	3.305
--	-	-
--	-	-

Note: Slanted line shows the range of the rated input voltage.

**COSEL**

Model	MGS3053R3
Item	Load Regulation
Object	+3.3V0.8A

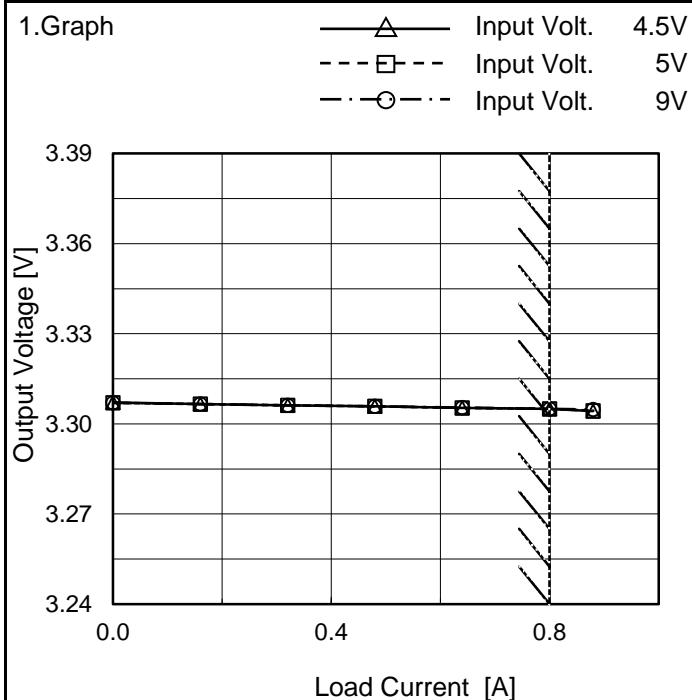

Note: Slanted line shows the range of the rated load current.

Temperature 25°C  
Testing Circuitry Figure A


## 2.Values

Load Current [A]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	3.307	3.307	3.307
0.16	3.307	3.307	3.307
0.32	3.306	3.306	3.306
0.48	3.306	3.306	3.306
0.64	3.305	3.305	3.305
0.80	3.305	3.305	3.305
0.88	3.304	3.304	3.305
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


**COSEL**

Model	MGS3053R3	Temperature	25°C
Item	Dynamic Load Response	Testing Circuitry	Figure A
Object	+3.3V0.8A		


Input Volt. 5 V  
 Cycle 1000 ms

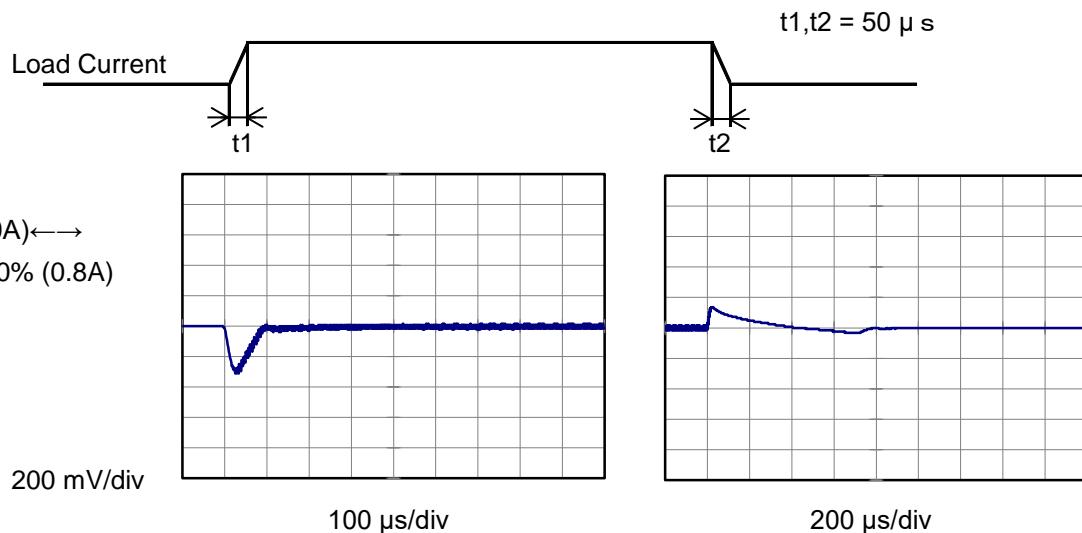

Min.Load (0A)  $\longleftrightarrow$   
 Load 50% (0.4A)

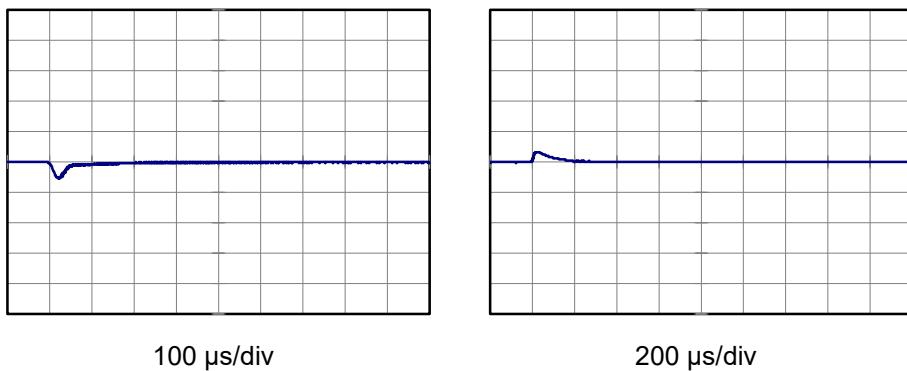

Load 50% (0.4A)  $\longleftrightarrow$   
 Load 100% (0.8A)

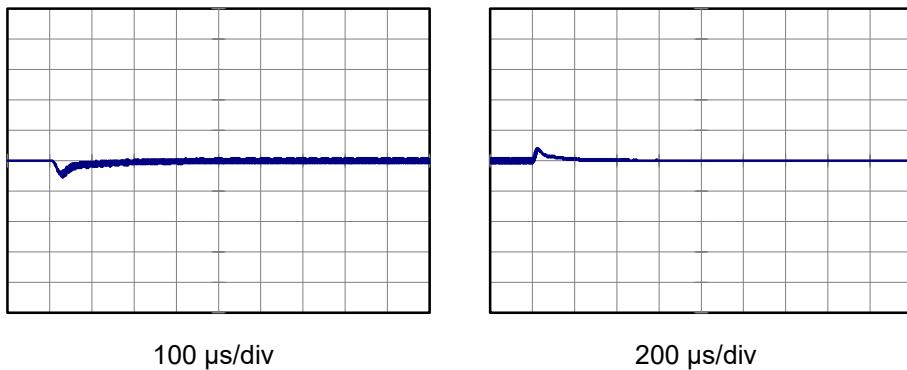


**COSEL**

Model	MGS3053R3
Item	Ripple Voltage (by Load Current)
Object	+3.3V0.8A

Temperature 25°C  
Testing Circuitry Figure B

## 1. Graph

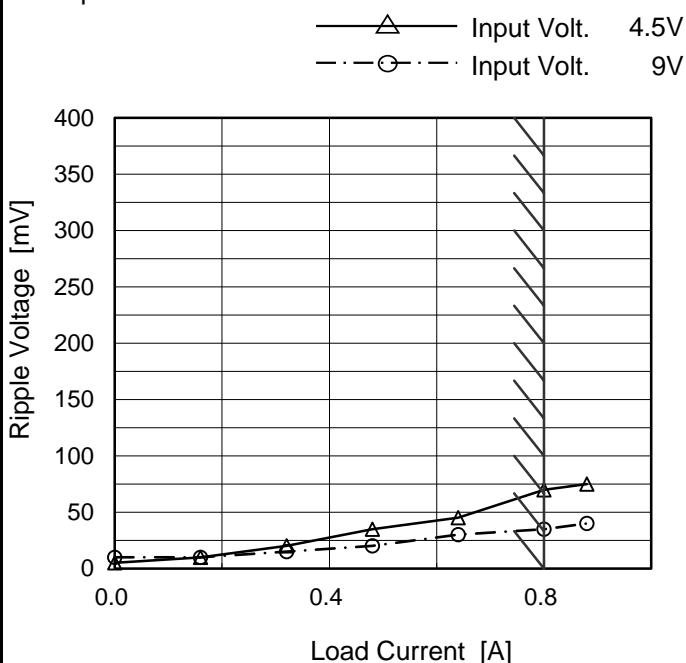

## 2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	5	10
0.16	10	10
0.32	20	15
0.48	35	20
0.64	45	30
0.80	70	35
0.88	75	40
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

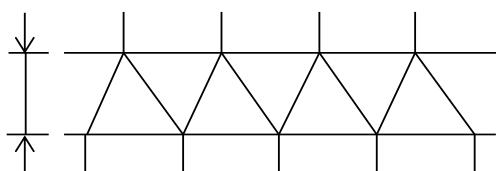



Fig.Complex Ripple Wave Form

**COSEL**

Model	MGS3053R3
Item	Ripple-Noise
Object	+3.3V0.8A

Temperature 25°C  
Testing Circuitry Figure B

## 1. Graph

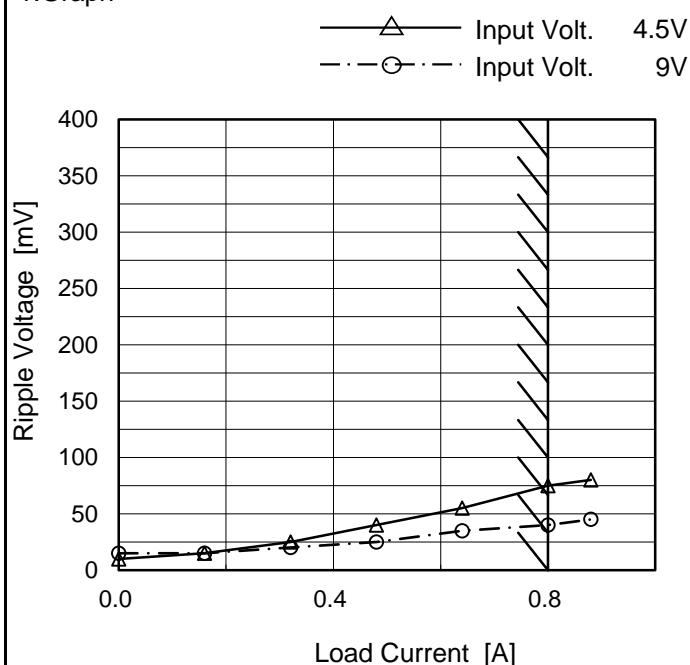

## 2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	10	15
0.16	15	15
0.32	25	20
0.48	40	25
0.64	55	35
0.80	75	40
0.88	80	45
--	-	-
--	-	-
--	-	-
--	-	-

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple Noise[mVp-p]

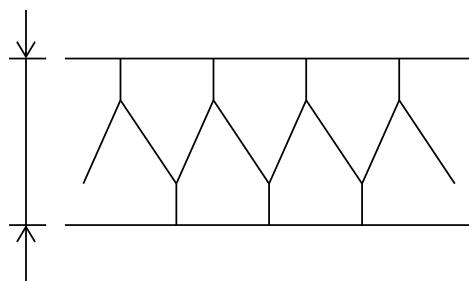


Fig.Complex Ripple Noise Wave Form


**COSEL**

Model MGS3053R3

Item Ripple Voltage (by Ambient Temp.)

Object +3.3V0.8A

## 1.Graph

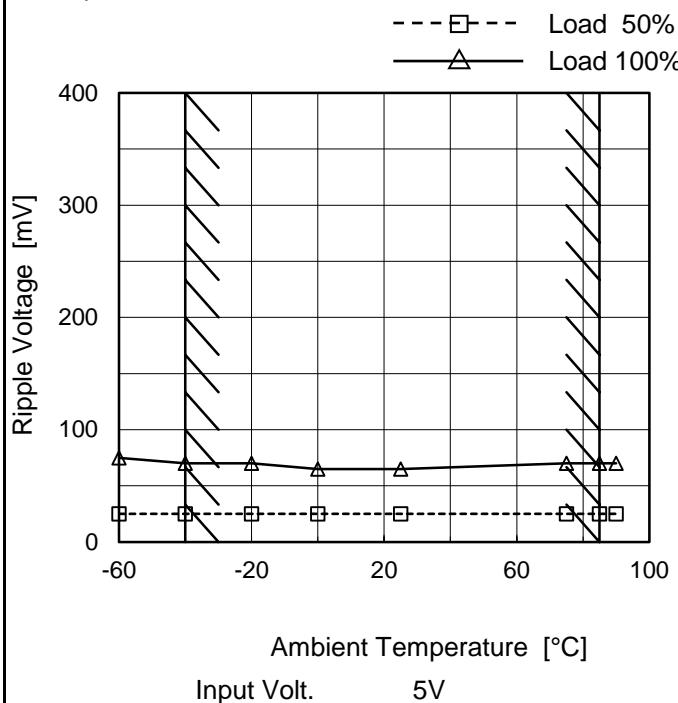

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure B

## 2.Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	25	75
-40	25	70
-20	25	70
0	25	65
25	25	65
75	25	70
85	25	70
90	25	70
--	-	-
--	-	-
--	-	-

**COSEL**


Model MGS3053R3

Item Ambient Temperature Drift

Object +3.3V0.8A

1.Graph

—△— Input Volt. 4.5V  
 - - -□--- Input Volt. 5V  
 - - -○--- Input Volt. 9V

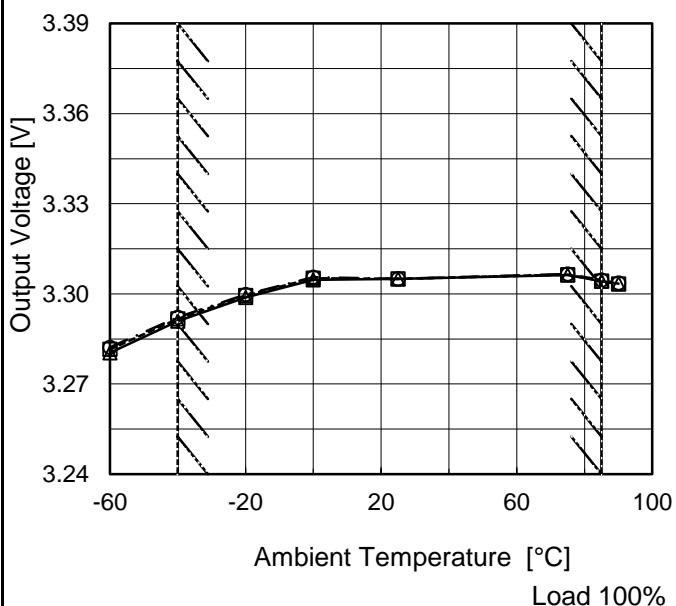

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-60	3.280	3.282	3.282
-40	3.291	3.292	3.292
-20	3.299	3.299	3.300
0	3.305	3.305	3.306
25	3.305	3.305	3.305
75	3.306	3.306	3.307
85	3.304	3.304	3.305
90	3.303	3.303	3.304
--	-	-	-
--	-	-	-
--	-	-	-



Model	MGS3053R3	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+3.3V0.8A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 85°C

Input Voltage : 4.5 - 9V

Load Current : 0 - 0.8A

\* Output Voltage Accuracy =  $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	25	4.5	0	3.311	$\pm 10$	$\pm 0.3$
Minimum Voltage	-40	4.5	0.8	3.291		

**COSEL**


Model MGS3053R3

Item Time Lapse Drift

Object +3.3V0.8A

Temperature 25°C  
Testing Circuitry Figure A

## 1.Graph

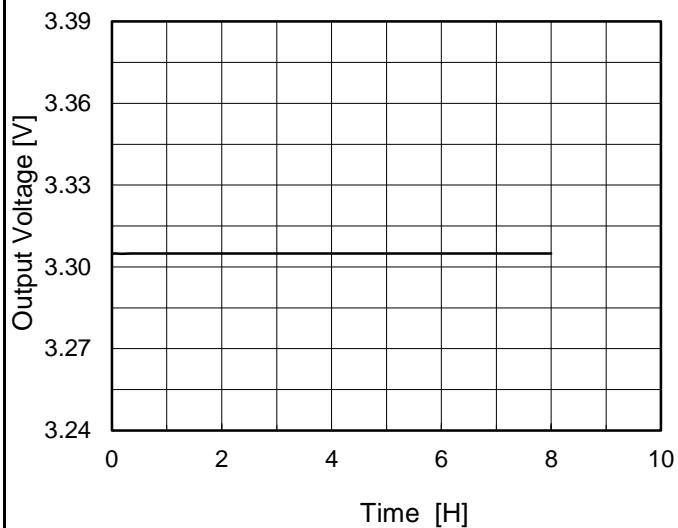


## 2.Values

Time since start [H]	Output Voltage [V]
0.0	3.305
0.5	3.305
1.0	3.305
2.0	3.305
3.0	3.305
4.0	3.305
5.0	3.305
6.0	3.305
7.0	3.305
8.0	3.305

**COSEL**


Model	MGS3053R3	Temperature	25°C
Item	Rise and Fall Time	Testing Circuitry	Figure A
Object	+3.3V0.8A		

## 1. Graph

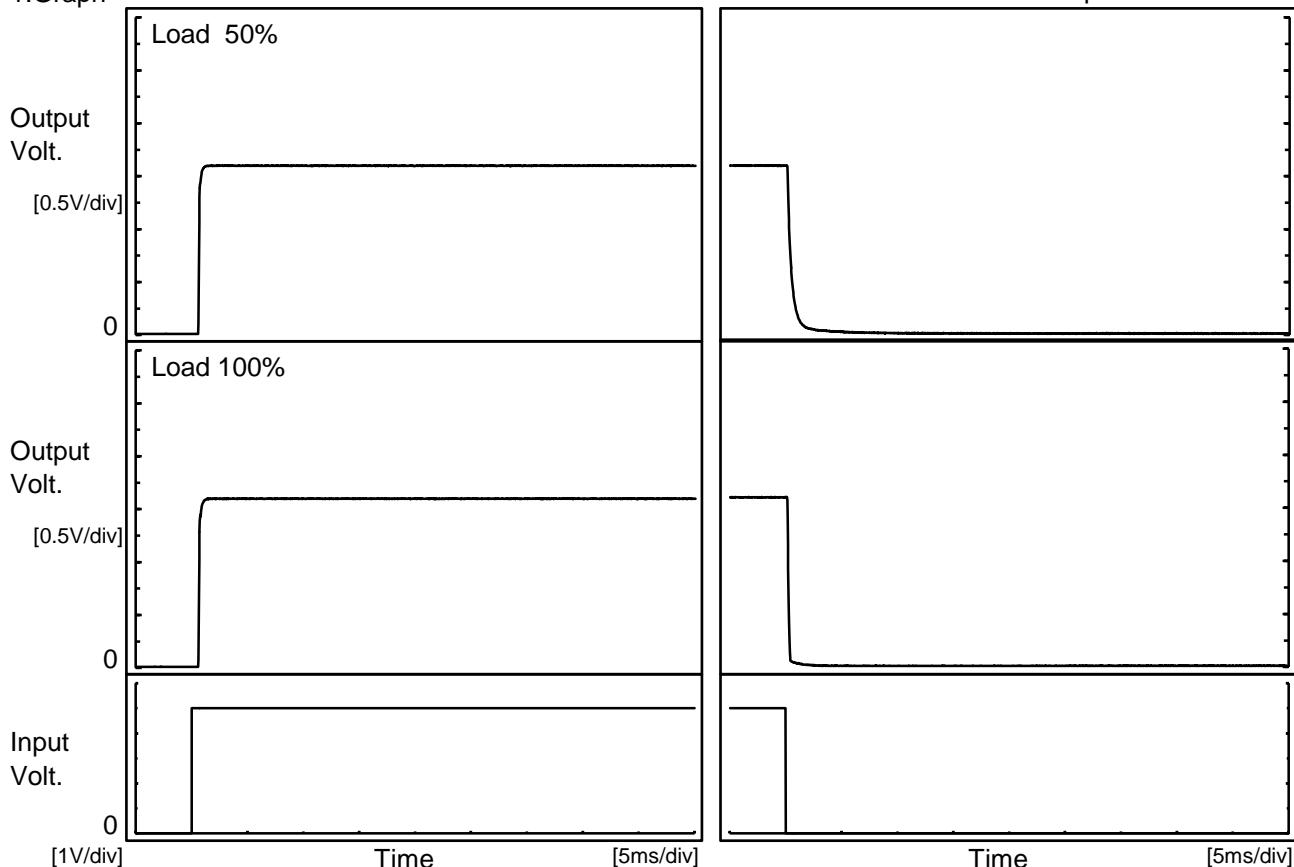

## 2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[ms]
50 %		0.6	0.2	0.8	0.2	0.9	
100 %		0.6	0.2	0.8	0.2	0.2	

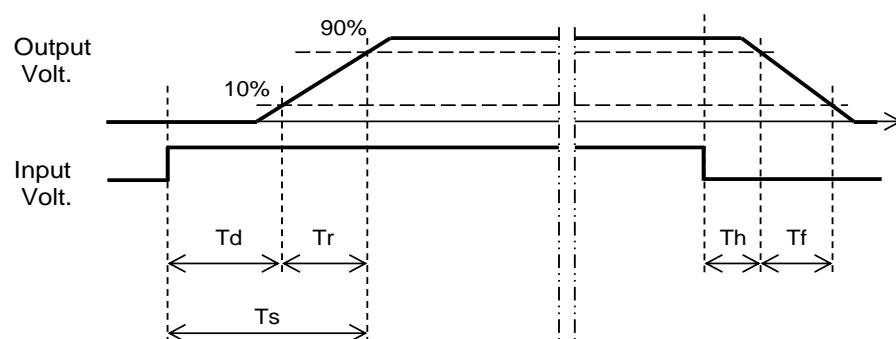


**COSEL**

Model MGS3053R3

Item Minimum Input Voltage  
for Regulated Output Voltage

Object +3.3V0.8A

## 1.Graph

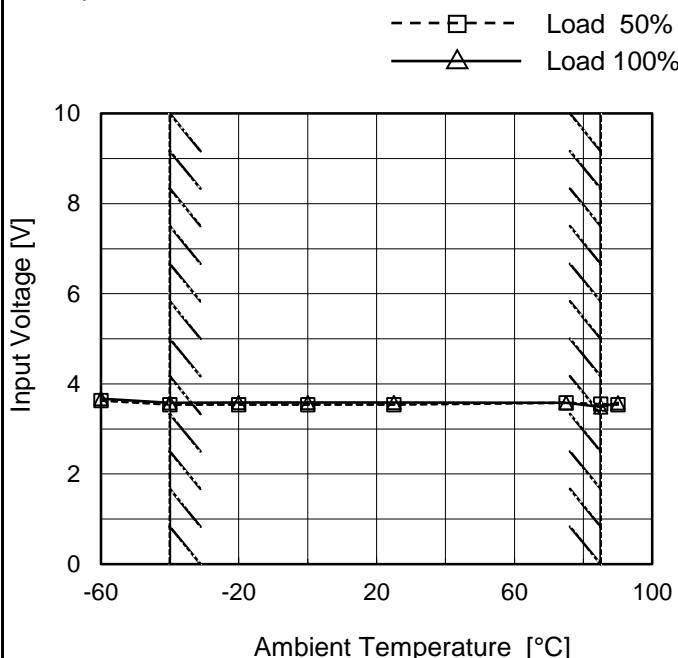

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A

## 2.Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-60	3.7	3.7
-40	3.6	3.6
-20	3.6	3.6
0	3.6	3.6
25	3.6	3.6
75	3.6	3.6
85	3.6	3.5
90	3.6	3.6
--	-	-
--	-	-
--	-	-


**COSEL**

Model MGS3053R3

Item Overcurrent Protection

Object +3.3V0.8A

1.Graph

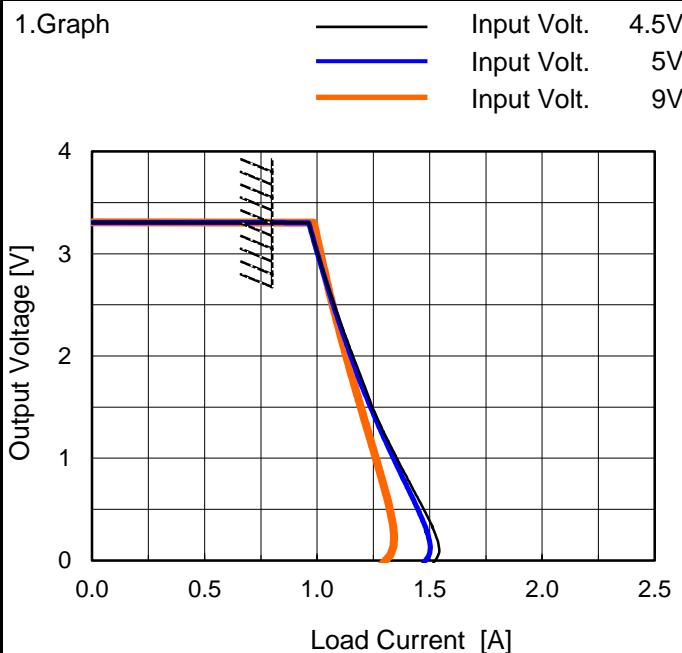

Note: Slanted line shows the range of the rated load current.


 Temperature 25°C  
 Testing Circuitry Figure A

2.Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
3.30	0.82	0.82	0.82
3.14	0.98	0.98	1.00
2.97	1.01	1.01	1.02
2.64	1.05	1.05	1.05
2.31	1.11	1.10	1.09
1.98	1.16	1.15	1.13
1.65	1.22	1.21	1.17
1.32	1.28	1.27	1.22
0.99	1.36	1.34	1.26
0.66	1.43	1.41	1.30
0.33	1.51	1.48	1.34
0.00	1.52	1.47	1.28

**COSEL**

Model	MGS3053R3
Item	Switching Frequency (by Load Current)
Object	+3.3V0.8A

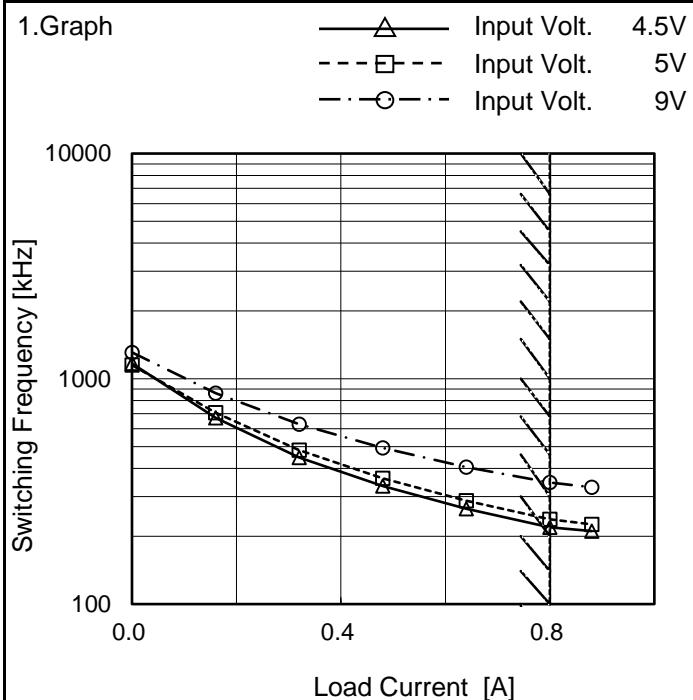
 Temperature 25°C  
 Testing Circuitry Figure A

## 2.Values

Load Current [A]	Frequency [kHz]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	1170	1150	1310
0.16	672	708	863
0.32	448	482	629
0.48	334	362	494
0.64	265	288	405
0.80	219	238	346
0.88	211	226	330
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

When load current is low, MG operates intermittently, so switching frequency would not become constant.

COSEL

