

Temperature increase of main components

Model: MGW1024□□

1. Conditions

- (1) Input :DC 24 [V]
- (2) Output :Rated output
- (3) Cooling method :Convection cooling
- (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

No.	Parts name	Symbol No.	Increase (ΔT)		Rated temp. [°C]	Reference
			[deg]			
			±12V	±15V		
1	Switching MOS-FET	TR11	47	43	150	Junction Temp.
2	Power control IC	IC11	46	43	150	Junction Temp.
3	Rectified diode (Output)	D201	55	49	150	Junction Temp.
4	Photocoupler	PC11	46	43	125	Junction Temp.
5	Transformer (PCB)	P2	51	47	130	
6	CASE	CASE	47	44	105	Top Surface Center
7						
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

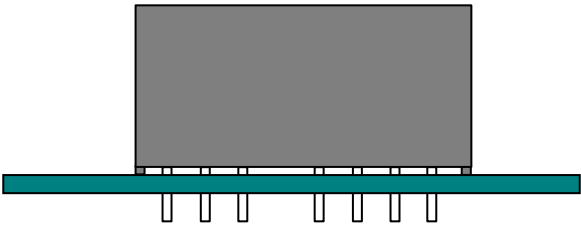


Fig.1.1 Mounting method