

Temperature increase of main components

Model: MGW1512□□

1. Conditions

- (1) Input :DC 12 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

Table 2-1 Temperature increase of main components							
No.	Parts name	Symbol No.	Increase (ΔT)			Rated temp. [°C]	Reference
			[deg]				
			$\pm 5V$	$\pm 12V$	$\pm 15V$		
1	Transformer	T101	76	58	50	155	
2	Switching MOS-FET	TR101	63	56	48	150	Junction Temp.
3	Rectified Diode(Output)	D201	66	55	44	150	Junction Temp.
4	Output Choke Coil	L201	66	53	43	130	
5	Bipolar Transistor	TR113	59	54	46	150	Junction Temp.
6	Case	—	58	47	36	—	
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

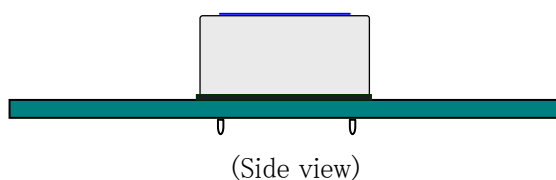


Fig.1.1 Mounting method
(Normal position)