



## TEST DATA OF R50A-5 (100V INPUT)

Regulated DC Power Supply

Date : Sep. 28. 1998

Approved by : Masanori Oshii  
Design Manager

Prepared by : Jun Uchida  
Design Engineer

コーセル株式会社  
**COSEL CO., LTD.**



## C O N T E N T S

1. Line Regulation	1
静的入力変動	
2. Input Current (by Load Current)	2
入力電流 (負荷特性)	
3. Input Power (by Load Current)	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage)	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current)	5
効率 (負荷特性)	
6. Power Factor (by Input Voltage)	6
力率 (入力電圧特性)	
7. Power Factor (by Load Current)	7
力率 (負荷特性)	
8. Hold-Up Time	8
出力保持時間	
9. Instantaneous Interruption Compensation	9
瞬時停電保障	
10. Load Regulation	10
静的負荷変動	
11. Ripple Voltage (by Load Current)	11
リップル電圧 (負荷特性)	
12. Ripple-Noise	12
リップルノイズ	
13. Overcurrent Protection	13
過電流保護	
14. Overvoltage Protection	14
過電圧保護	
15. Inrush Current	15
突入電流	
16. Dynamic Load Response	16
動的負荷変動	
17. Rise and Fall Time	17
立ち上り、立下がり時間	
18. Ambient Temperature Drift	18
周囲温度変動	
19. Minimum Input Voltage for Regulated Output Voltage	19
最低レギュレーション電圧	
20. Ripple Voltage (by Ambient Temperature)	20
リップル電圧 (周囲温度特性)	
21. Time Lapse Drift	21
経時ドリフト	
22. Output Voltage Accuracy	22
定電圧精度	
23. Condensation	23
結露特性	
24. Leakage Current	24
漏洩電流	
25. Line Noise Tolerance	25
入力雜音耐量	
26. Conducted Emission	26
雜音端子電圧	
27. Figure of Testing Circuitry	27
測定回路図	

(Final Page 28 )

**COSEL**

Model	R50A-5	Temperature Testing Circuitry	25°C Figure A																																
Item	Line Regulation 静的入力変動																																		
Object	+5.0V 10.00A																																		
1. Graph		<p>□ Load 50%            —△— Load 100%</p>																																	
2. Values		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th>Load 50%</th> <th>Load 100%</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>75</td><td>5.015</td><td>5.007</td></tr> <tr><td>80</td><td>5.015</td><td>5.007</td></tr> <tr><td>85</td><td>5.015</td><td>5.007</td></tr> <tr><td>90</td><td>5.015</td><td>5.007</td></tr> <tr><td>100</td><td>5.015</td><td>5.007</td></tr> <tr><td>110</td><td>5.015</td><td>5.007</td></tr> <tr><td>120</td><td>5.015</td><td>5.007</td></tr> <tr><td>132</td><td>5.015</td><td>5.007</td></tr> <tr><td>140</td><td>5.016</td><td>5.007</td></tr> </tbody> </table>		Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	75	5.015	5.007	80	5.015	5.007	85	5.015	5.007	90	5.015	5.007	100	5.015	5.007	110	5.015	5.007	120	5.015	5.007	132	5.015	5.007	140	5.016	5.007
Input Voltage [V]	Load 50%	Load 100%																																	
	Output Volt. [V]	Output Volt. [V]																																	
75	5.015	5.007																																	
80	5.015	5.007																																	
85	5.015	5.007																																	
90	5.015	5.007																																	
100	5.015	5.007																																	
110	5.015	5.007																																	
120	5.015	5.007																																	
132	5.015	5.007																																	
140	5.016	5.007																																	


Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

**COSEL**

Model	R50A-5
Item	Input Current (by Load Current) 入力電流 (負荷特性)
Output	_____

## 1. Graph

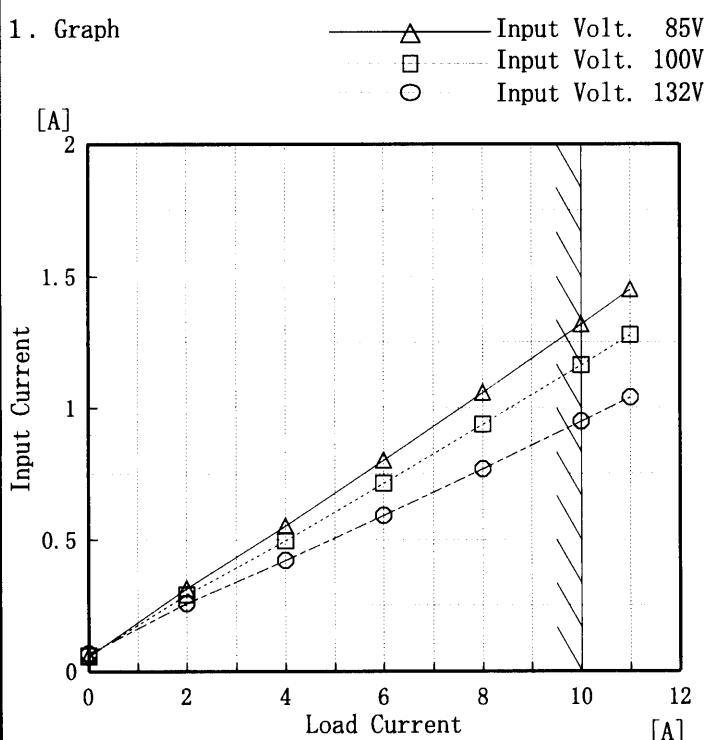

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values


Load Current [A]	Input Current [A]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0	0.056	0.060	0.066
2	0.314	0.291	0.257
4	0.553	0.497	0.421
6	0.802	0.714	0.593
8	1.058	0.938	0.770
10	1.317	1.163	0.949
11	1.450	1.278	1.040
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**

Model	R50A-5
Item	Input Power (by Load Current) 入力電力 (負荷特性)
Output	_____

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

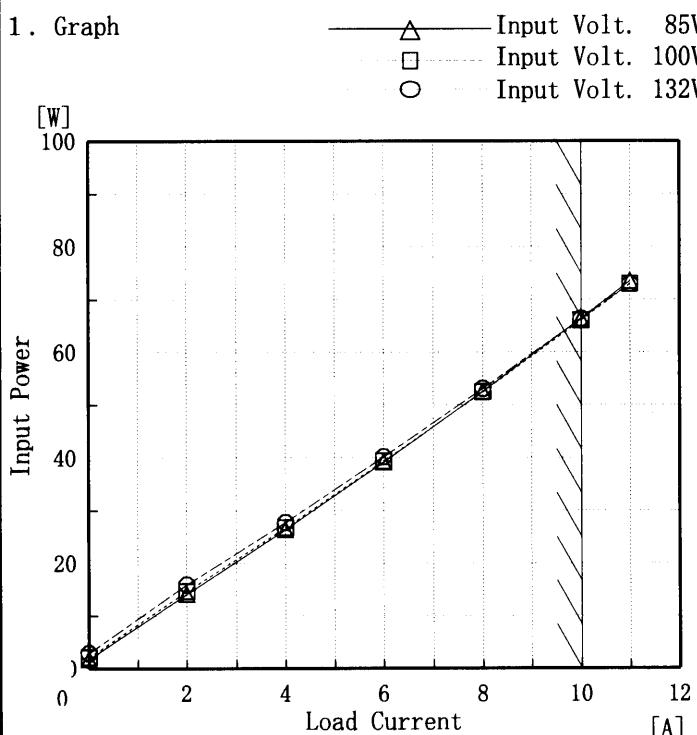


## 2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
0	1.70	2.06	2.85
2	14.11	14.61	15.88
4	26.36	26.68	27.76
6	39.16	39.33	40.18
8	52.56	52.49	53.10
10	66.40	66.04	66.30
11	73.53	73.00	73.00
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

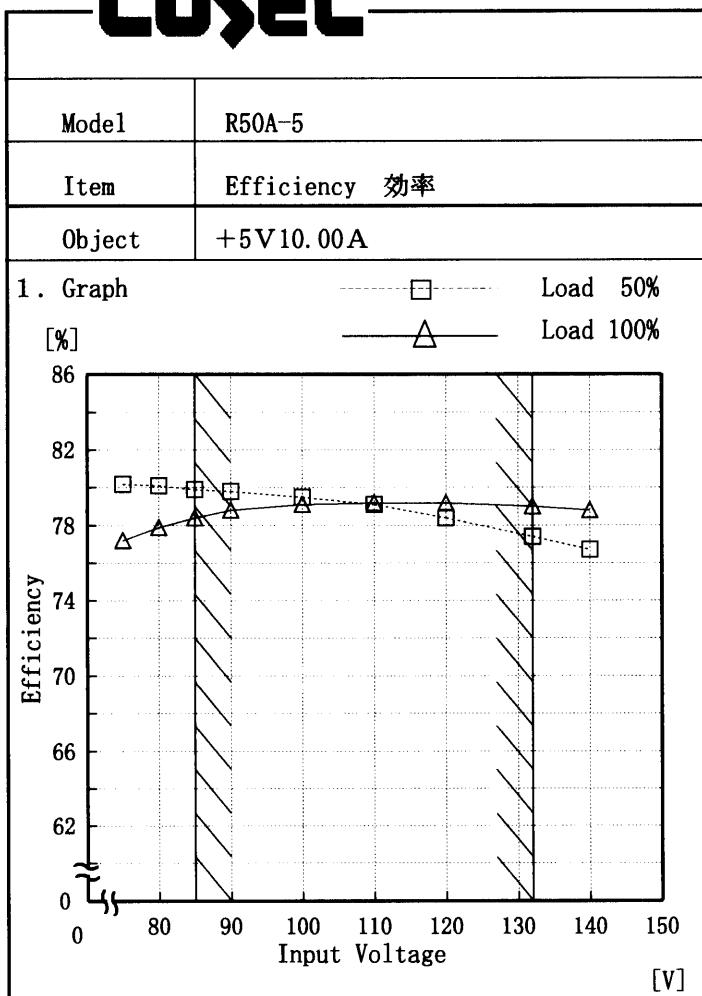**COSSEL**

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
75	80.2	77.2
80	80.1	77.9
85	79.9	78.4
90	79.8	78.8
100	79.5	79.1
110	79.1	79.2
120	78.4	79.2
132	77.4	79.0
140	76.7	78.8

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

**COSEL**

Model	R50A-5	Temperature	25°C																																																			
Item	Efficiency (by Load Current) 効率(負荷電流特性)	Testing Circuitry	Figure A																																																			
Output	_____																																																					
1. Graph																																																						
<p>The graph plots Efficiency [%] on the y-axis (40 to 90) against Load Current [A] on the x-axis (0 to 12). Three data series are shown for different input voltages: 85V (triangles), 100V (squares), and 132V (circles). All curves show efficiency increasing with load current until it plateaus or slightly decreases at higher currents. A slanted line on the right side of the graph indicates the rated load current range.</p> <table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency 85V [%]</th> <th>Efficiency 100V [%]</th> <th>Efficiency 132V [%]</th> </tr> </thead> <tbody> <tr><td>2</td><td>71.0</td><td>68.9</td><td>63.5</td></tr> <tr><td>4</td><td>76.0</td><td>75.2</td><td>72.4</td></tr> <tr><td>6</td><td>76.9</td><td>76.7</td><td>75.1</td></tr> <tr><td>8</td><td>76.5</td><td>76.7</td><td>75.8</td></tr> <tr><td>10</td><td>75.6</td><td>76.0</td><td>75.8</td></tr> <tr><td>11</td><td>75.0</td><td>75.6</td><td>75.6</td></tr> </tbody> </table>				Load Current [A]	Efficiency 85V [%]	Efficiency 100V [%]	Efficiency 132V [%]	2	71.0	68.9	63.5	4	76.0	75.2	72.4	6	76.9	76.7	75.1	8	76.5	76.7	75.8	10	75.6	76.0	75.8	11	75.0	75.6	75.6																							
Load Current [A]	Efficiency 85V [%]	Efficiency 100V [%]	Efficiency 132V [%]																																																			
2	71.0	68.9	63.5																																																			
4	76.0	75.2	72.4																																																			
6	76.9	76.7	75.1																																																			
8	76.5	76.7	75.8																																																			
10	75.6	76.0	75.8																																																			
11	75.0	75.6	75.6																																																			
2. Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> </thead> <tbody> <tr><td>2</td><td>71.0</td><td>68.9</td><td>63.5</td></tr> <tr><td>4</td><td>76.0</td><td>75.2</td><td>72.4</td></tr> <tr><td>6</td><td>76.9</td><td>76.7</td><td>75.1</td></tr> <tr><td>8</td><td>76.5</td><td>76.7</td><td>75.8</td></tr> <tr><td>10</td><td>75.6</td><td>76.0</td><td>75.8</td></tr> <tr><td>11</td><td>75.0</td><td>75.6</td><td>75.6</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]			Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	2	71.0	68.9	63.5	4	76.0	75.2	72.4	6	76.9	76.7	75.1	8	76.5	76.7	75.8	10	75.6	76.0	75.8	11	75.0	75.6	75.6	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																																			
2	71.0	68.9	63.5																																																			
4	76.0	75.2	72.4																																																			
6	76.9	76.7	75.1																																																			
8	76.5	76.7	75.8																																																			
10	75.6	76.0	75.8																																																			
11	75.0	75.6	75.6																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

**COSSEL**


Model R50A-5

Item Power Factor (by Input Voltage)  
力率(入力電圧特性)

Object

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

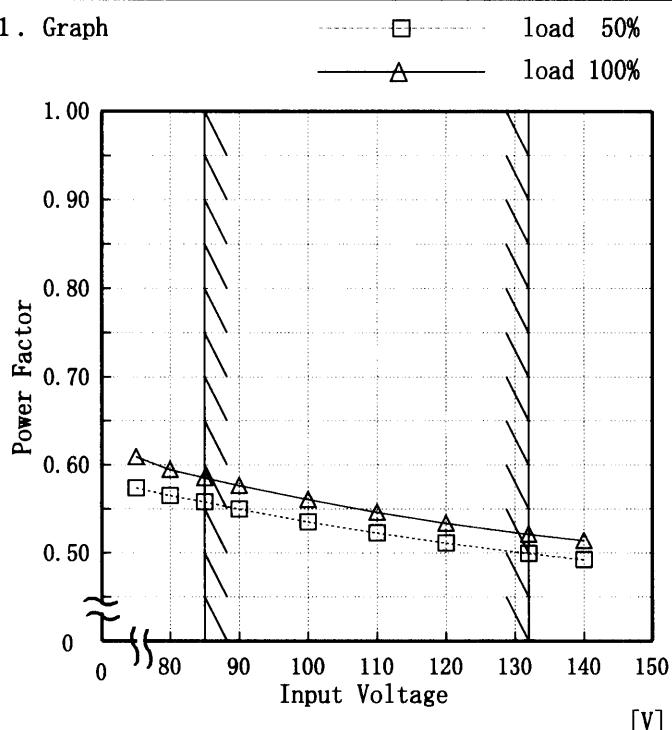

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

## 2. Values


Input Voltage [V]	load 50%	load 100%
	Power Factor	Power Factor
75	0.57	0.61
80	0.57	0.59
85	0.56	0.59
90	0.55	0.58
100	0.54	0.56
110	0.52	0.55
120	0.51	0.53
132	0.50	0.52
140	0.49	0.51

**COSEL**

Model	R50A-5
Item	Power Factor (by Load Current) 力率 (負荷電流特性)
Output	_____

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

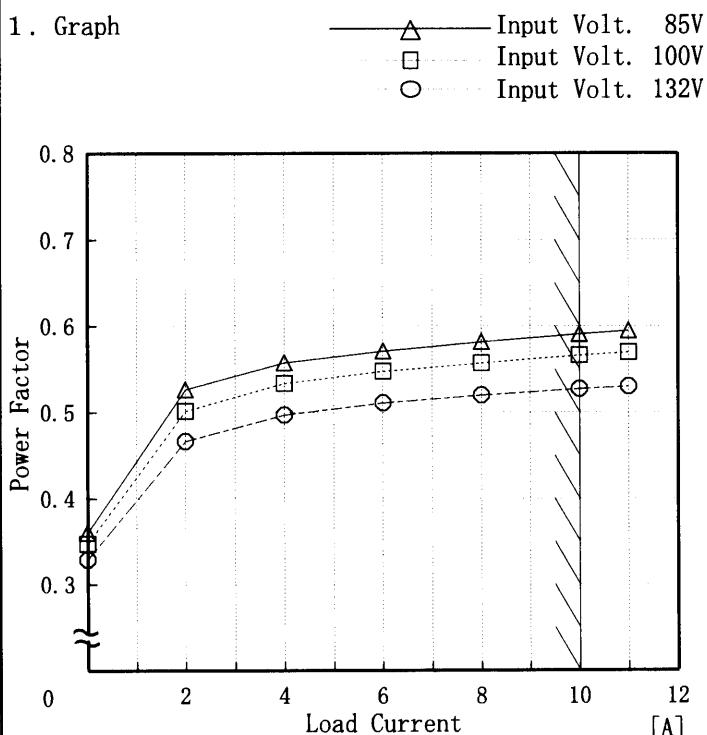

## 2. Values

Load Current [A]	Power Factor		
	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
—	0.36	0.35	0.33
2	0.53	0.50	0.47
4	0.56	0.53	0.50
6	0.57	0.55	0.51
8	0.58	0.56	0.52
10	0.59	0.57	0.53
11	0.59	0.57	0.53
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—


Note: Slanted line shows the range of the rated load current

(注)斜線は定格負荷電流範囲を示す。

**COSEL**

Model	R50A-5
Item	Hold-Up Time 出力保持時間
Object	+5.0V 10A

Temperature 25°C  
Testing Circuitry Figure A

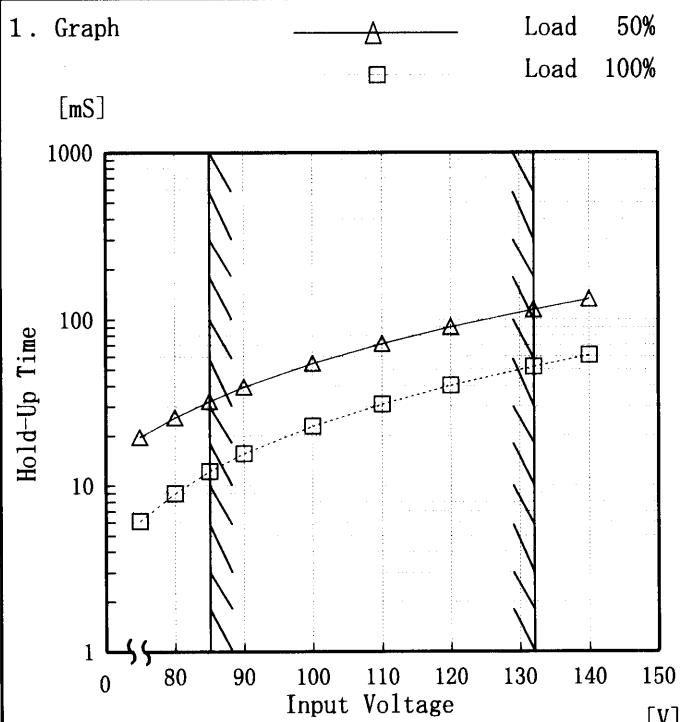

## 2. Values

Input Voltage [V]	Load 50%	Load 100%
	Hold-Up Time [ms]	Hold-Up Time [ms]
75	20	6
80	26	9
85	32	12
90	39	16
100	55	23
110	72	31
120	90	40
132	115	52
140	133	61

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.


Note: Slanted line shows the range of the rated input voltage.

出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。

(注)斜線は定格入力電圧範囲を示す。

**COSEL**

Model	R50A-5
Item	Instantaneous Interruption Compensation 瞬時停電保障
Object	+5.0V 10.00A

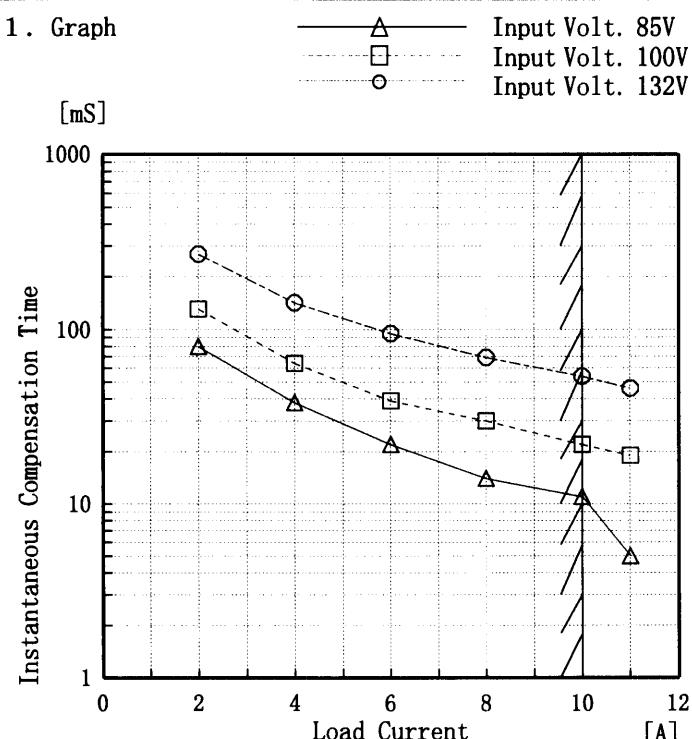

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.

瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間という。

(注) 斜線は定格負荷電流範囲を示す。

Testing Circuitry Figure A

## 2. Values

Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Time [mS]		
0.00	—	—	—
2.00	80	131	270
4.00	38	64	142
6.00	22	39	95
8.00	14	30	69
10.00	11	22	54
11.00	5	19	46
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—

**COSEL**


Model	R50A-5	Temperature Testing Circuitry	25°C Figure A																																															
Item	Load Regulation 靜的負荷変動																																																	
Object	+5.0V 10.00A																																																	
1. Graph		2. Values																																																
<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Legend:</p> <ul style="list-style-type: none"> <li>Input Volt. 85V (Triangle)</li> <li>Input Volt. 100V (Square)</li> <li>Input Volt. 132V (Circle)</li> </ul>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 85[V]</th> <th>Input Volt. 100[V]</th> <th>Input Volt. 132[V]</th> </tr> <tr> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> <th>Output Volt. [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.024</td><td>5.024</td><td>5.024</td></tr> <tr><td>2.0</td><td>5.020</td><td>5.020</td><td>5.020</td></tr> <tr><td>4.0</td><td>5.017</td><td>5.017</td><td>5.017</td></tr> <tr><td>6.0</td><td>5.014</td><td>5.014</td><td>5.014</td></tr> <tr><td>8.0</td><td>5.010</td><td>5.010</td><td>5.010</td></tr> <tr><td>10.0</td><td>5.007</td><td>5.007</td><td>5.007</td></tr> <tr><td>11.0</td><td>5.005</td><td>5.005</td><td>5.005</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.0	5.024	5.024	5.024	2.0	5.020	5.020	5.020	4.0	5.017	5.017	5.017	6.0	5.014	5.014	5.014	8.0	5.010	5.010	5.010	10.0	5.007	5.007	5.007	11.0	5.005	5.005	5.005	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.0	5.024	5.024	5.024																																															
2.0	5.020	5.020	5.020																																															
4.0	5.017	5.017	5.017																																															
6.0	5.014	5.014	5.014																																															
8.0	5.010	5.010	5.010																																															
10.0	5.007	5.007	5.007																																															
11.0	5.005	5.005	5.005																																															
—	—	—	—																																															
—	—	—	—																																															
—	—	—	—																																															

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

**COSEL**

Model	R50A-5	Temperature Testing Circuitry 25°C Figure A																								
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)																									
Object	+5V 10.00A																									
1. Graph	<p>Input Volt. 85V [mV]      Input Volt. 132V [mV]</p> <table border="1"> <caption>Data extracted from Figure 1 graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Ripple Output Volt. 85V [mV]</th> <th>Ripple Output Volt. 132V [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>20</td><td>20</td></tr> <tr><td>2.0</td><td>30</td><td>30</td></tr> <tr><td>4.0</td><td>40</td><td>40</td></tr> <tr><td>6.0</td><td>40</td><td>40</td></tr> <tr><td>8.0</td><td>40</td><td>40</td></tr> <tr><td>10.0</td><td>40</td><td>50</td></tr> <tr><td>11.0</td><td>50</td><td>50</td></tr> </tbody> </table>	Load Current [A]	Ripple Output Volt. 85V [mV]	Ripple Output Volt. 132V [mV]	0.0	20	20	2.0	30	30	4.0	40	40	6.0	40	40	8.0	40	40	10.0	40	50	11.0	50	50	2. Values
Load Current [A]	Ripple Output Volt. 85V [mV]	Ripple Output Volt. 132V [mV]																								
0.0	20	20																								
2.0	30	30																								
4.0	40	40																								
6.0	40	40																								
8.0	40	40																								
10.0	40	50																								
11.0	50	50																								
2. Values																										

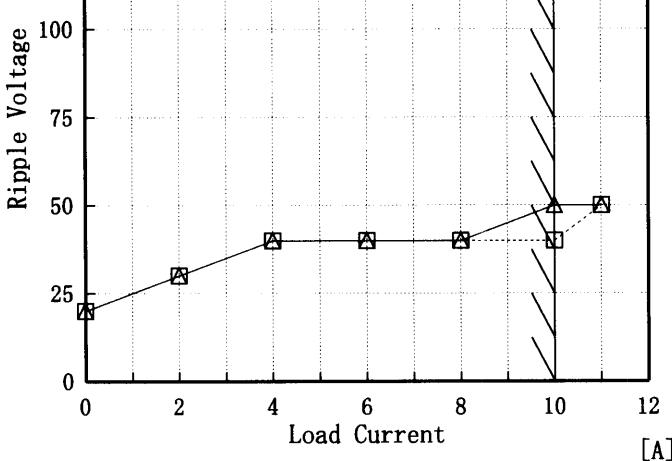

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

- T1: Due to AC Input Line  
      入力商用周期
- T2: Due to Switching  
      スイッチング周期

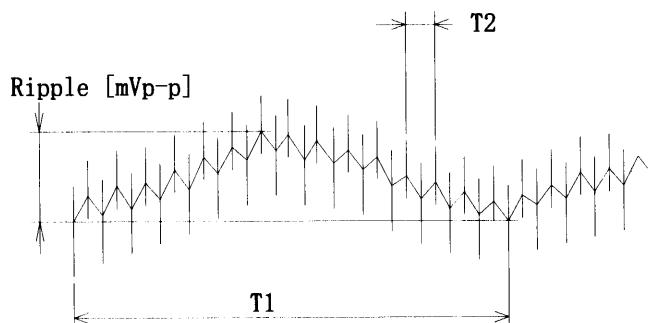


Fig. Complex Ripple Wave Form

図 リップル波形詳細図

Load Current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.0	20	20
2.0	30	30
4.0	40	40
6.0	40	40
8.0	40	40
10.0	40	50
11.0	50	50
—	—	—
—	—	—
—	—	—
—	—	—

COSEL

Model	R50A-5	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																								
Object	+5V 10.00A																																								
1. Graph	<table border="1"> <caption>Data extracted from Graph 1.1</caption> <thead> <tr> <th>Load Current [A]</th> <th>Ripple-Noise 85V [mV] (□)</th> <th>Ripple-Noise 132V [mV] (△)</th> </tr> </thead> <tbody> <tr><td>0</td><td>30</td><td>35</td></tr> <tr><td>2</td><td>50</td><td>50</td></tr> <tr><td>4</td><td>50</td><td>50</td></tr> <tr><td>6</td><td>50</td><td>60</td></tr> <tr><td>8</td><td>60</td><td>60</td></tr> <tr><td>10</td><td>60</td><td>60</td></tr> <tr><td>11</td><td>70</td><td>70</td></tr> </tbody> </table>			Load Current [A]	Ripple-Noise 85V [mV] (□)	Ripple-Noise 132V [mV] (△)	0	30	35	2	50	50	4	50	50	6	50	60	8	60	60	10	60	60	11	70	70														
Load Current [A]	Ripple-Noise 85V [mV] (□)	Ripple-Noise 132V [mV] (△)																																							
0	30	35																																							
2	50	50																																							
4	50	50																																							
6	50	60																																							
8	60	60																																							
10	60	60																																							
11	70	70																																							
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 85 [V]</th> <th>Input Volt. 132 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>30</td><td>40</td></tr> <tr><td>2.0</td><td>50</td><td>50</td></tr> <tr><td>4.0</td><td>50</td><td>50</td></tr> <tr><td>6.0</td><td>50</td><td>60</td></tr> <tr><td>8.0</td><td>60</td><td>60</td></tr> <tr><td>10.0</td><td>60</td><td>60</td></tr> <tr><td>11.0</td><td>70</td><td>70</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.0	30	40	2.0	50	50	4.0	50	50	6.0	50	60	8.0	60	60	10.0	60	60	11.0	70	70	—	—	—	—	—	—	—	—	—	—	—	—
Load current [A]	Input Volt. 85 [V]	Input Volt. 132 [V]																																							
	Ripple-Noise [mV]	Ripple-Noise [mV]																																							
0.0	30	40																																							
2.0	50	50																																							
4.0	50	50																																							
6.0	50	60																																							
8.0	60	60																																							
10.0	60	60																																							
11.0	70	70																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p>Ripple-Noise is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																									

**COSSEL**


Model	R50A-5	Temperature 25°C Testing Circuitry Figure A		
Item	Overcurrent Protection 過電流保護			
Object	+5.0V 10.00A			
1. Graph	<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Input Volt. 85 V Input Volt. 100 V Input Volt. 132 V</p>			
2. Values	Output Voltage [V]	Input Volt. 85[V] Load Current [A]	Input Volt. 100[V] Load Current [A]	Input Volt. 132[V] Load Current [A]
5.00	12.44	12.37	12.33	
4.75	12.46	12.38	12.33	
4.50	12.48	12.39	12.33	
4.00	12.51	12.42	12.36	
3.50	12.57	12.44	12.37	
3.00	12.54	12.46	12.39	
2.50	12.55	12.48	12.41	
2.00	12.56	12.50	12.41	
1.50	12.57	12.51	12.40	
1.00	12.55	12.49	12.37	
0.50	12.50	12.43	12.28	
0.00	12.38	12.30	12.15	

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	R50A-5
Item	Overvoltage Protection 過電圧保護
Object	+5.0V 10.00A

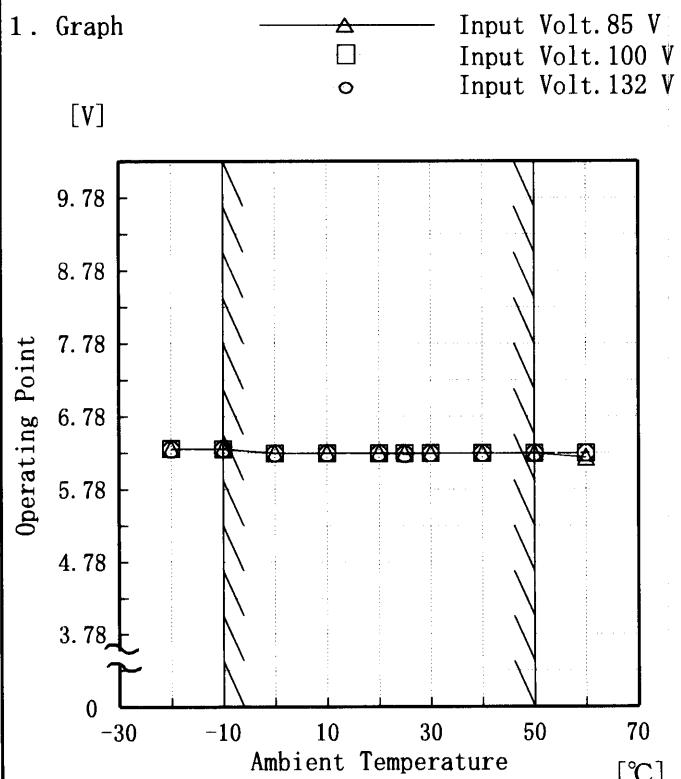

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


Testing Circuitry      Figure A

2. Values

Ambient Temp. [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Operating Point [V]		
-20	6.3	6.3	6.3
-10	6.3	6.3	6.3
0	6.3	6.3	6.3
10	6.3	6.3	6.3
20	6.3	6.3	6.3
25	6.3	6.3	6.3
30	6.3	6.3	6.3
40	6.3	6.3	6.3
50	6.3	6.3	6.3
60	6.2	6.3	6.3
—	—	—	—

COSEL

Model	R50A-5	Temperature Testing Circuitry Figure A	25°C
Item	Inrush Current 突入電流		
Object	—		

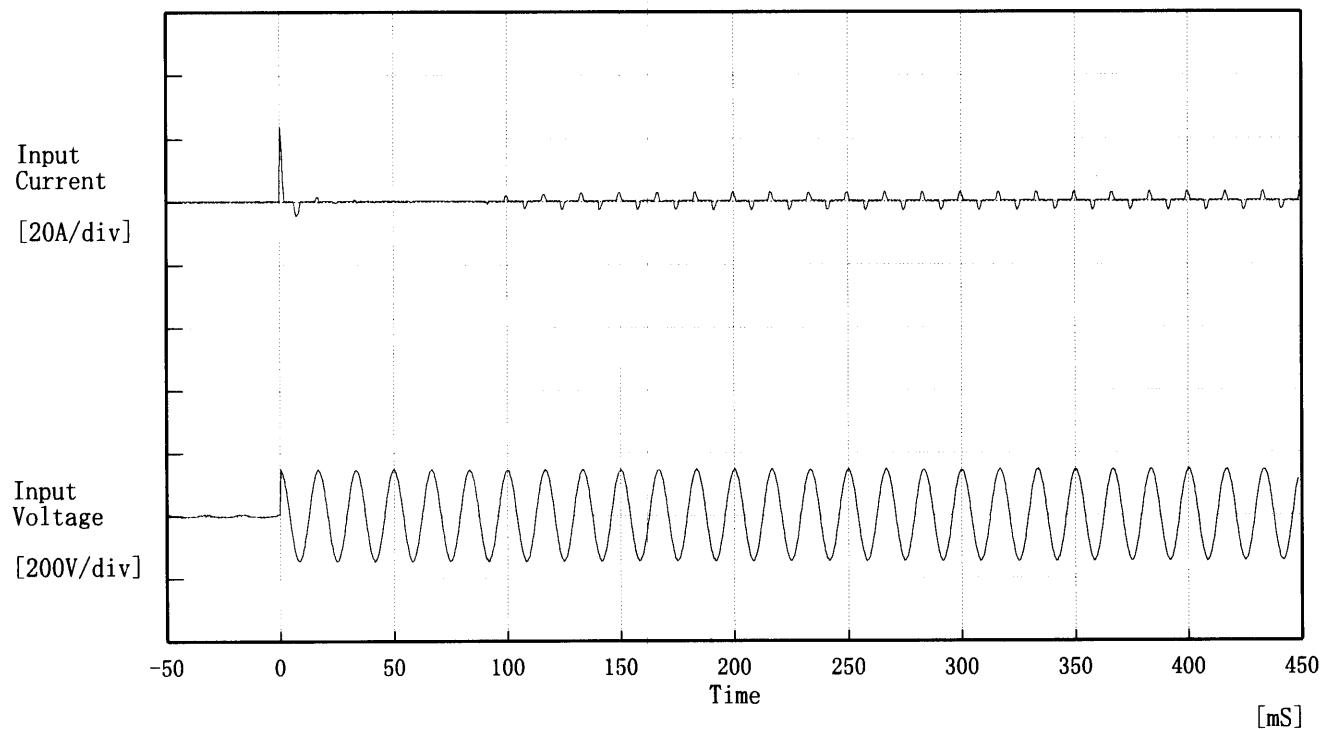

Input Voltage 100 V


Frequency 60 Hz

Load 100 %

Inrush Current

① 23.96 [A]


② 3.16 [A]

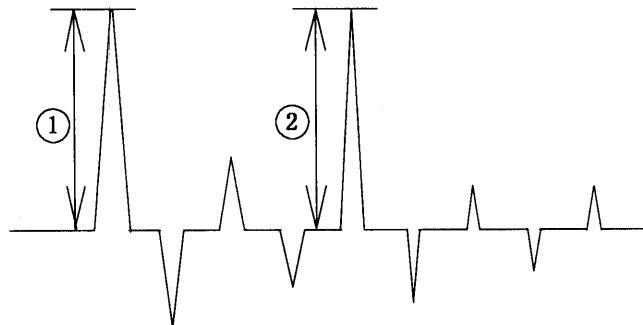



**COSEL**

Model	R50A-5	Temperature Testing Circuitry 25°C Figure A
Item	Dynamic Load Response 動的負荷變動	
Object	+5V 10.00A	



Input Volt. 100 V  
 Cycle 200 mS



Min. Load ↔  
 Load 100 %

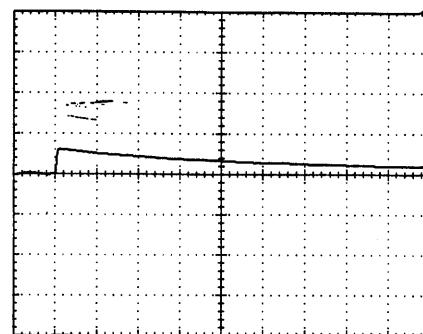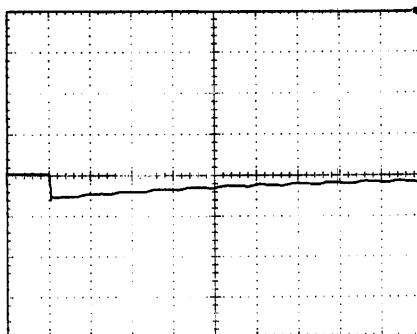

Min. Load ↔  
 Load 50 %

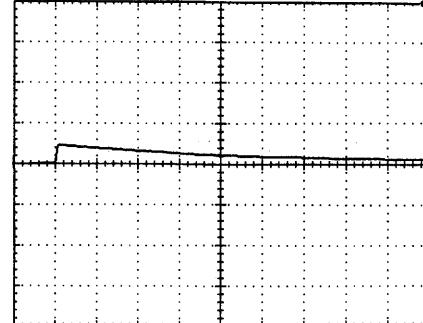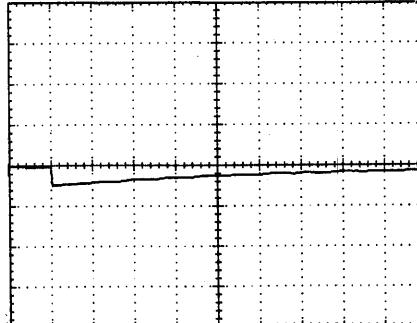

100 mV/div


10 mS/div

**COSEL**

Model	R50A-5
Item	Rise and Fall Time 立上り、立下り時間
Object	+5.0V 10.00A


Temperature 25°C  
Testing Circuitry Figure A


## 1. Graph

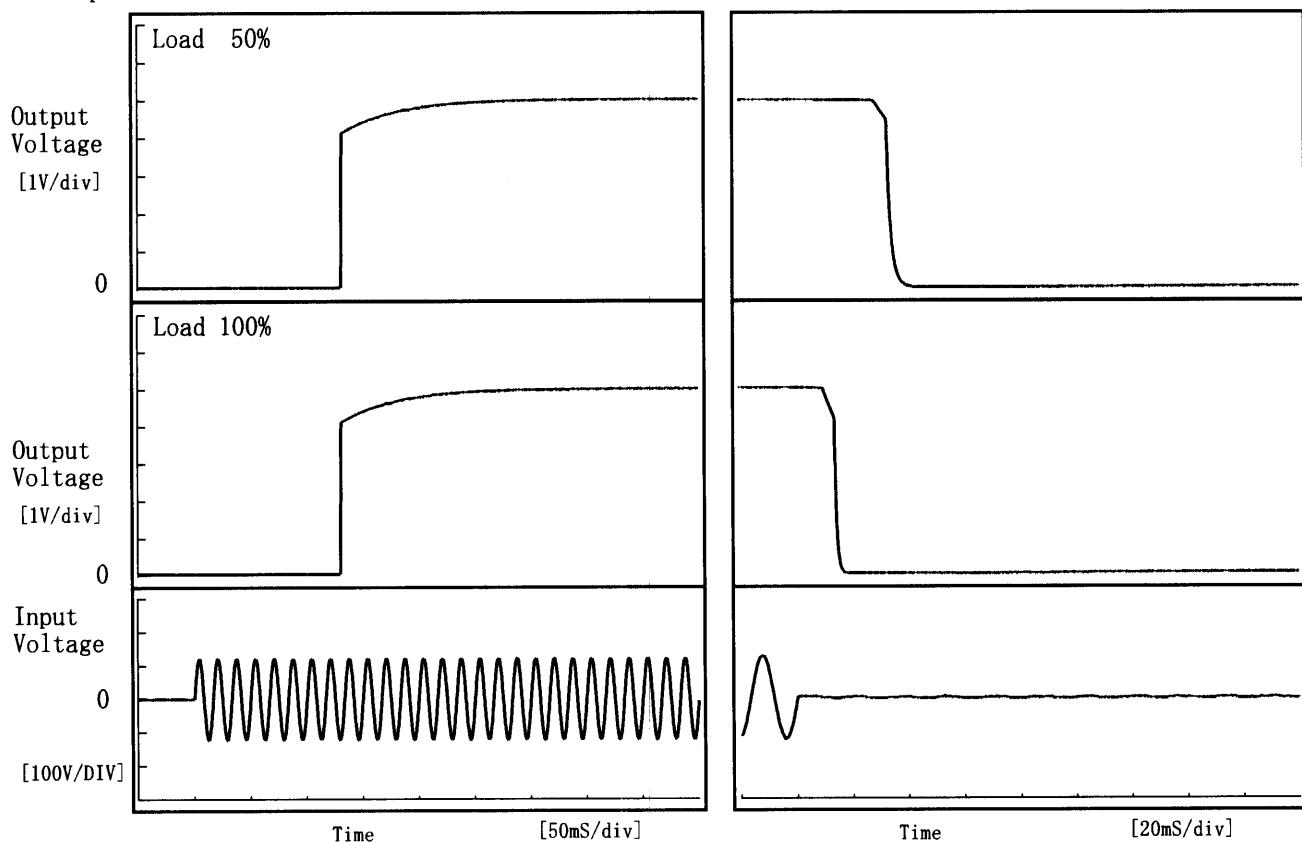

## 2. Values

Load	Time	T d	T r	T s	T h	T f	[mS]
50 %		130.8	31.0	161.8	32.0	4.2	
100 %		130.0	32.3	162.3	12.0	3.7	

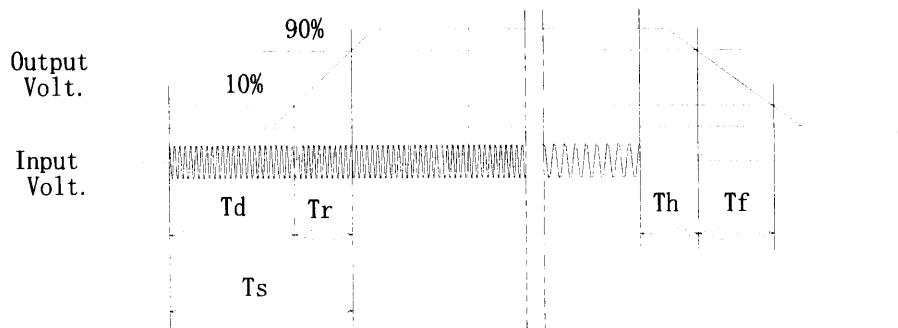

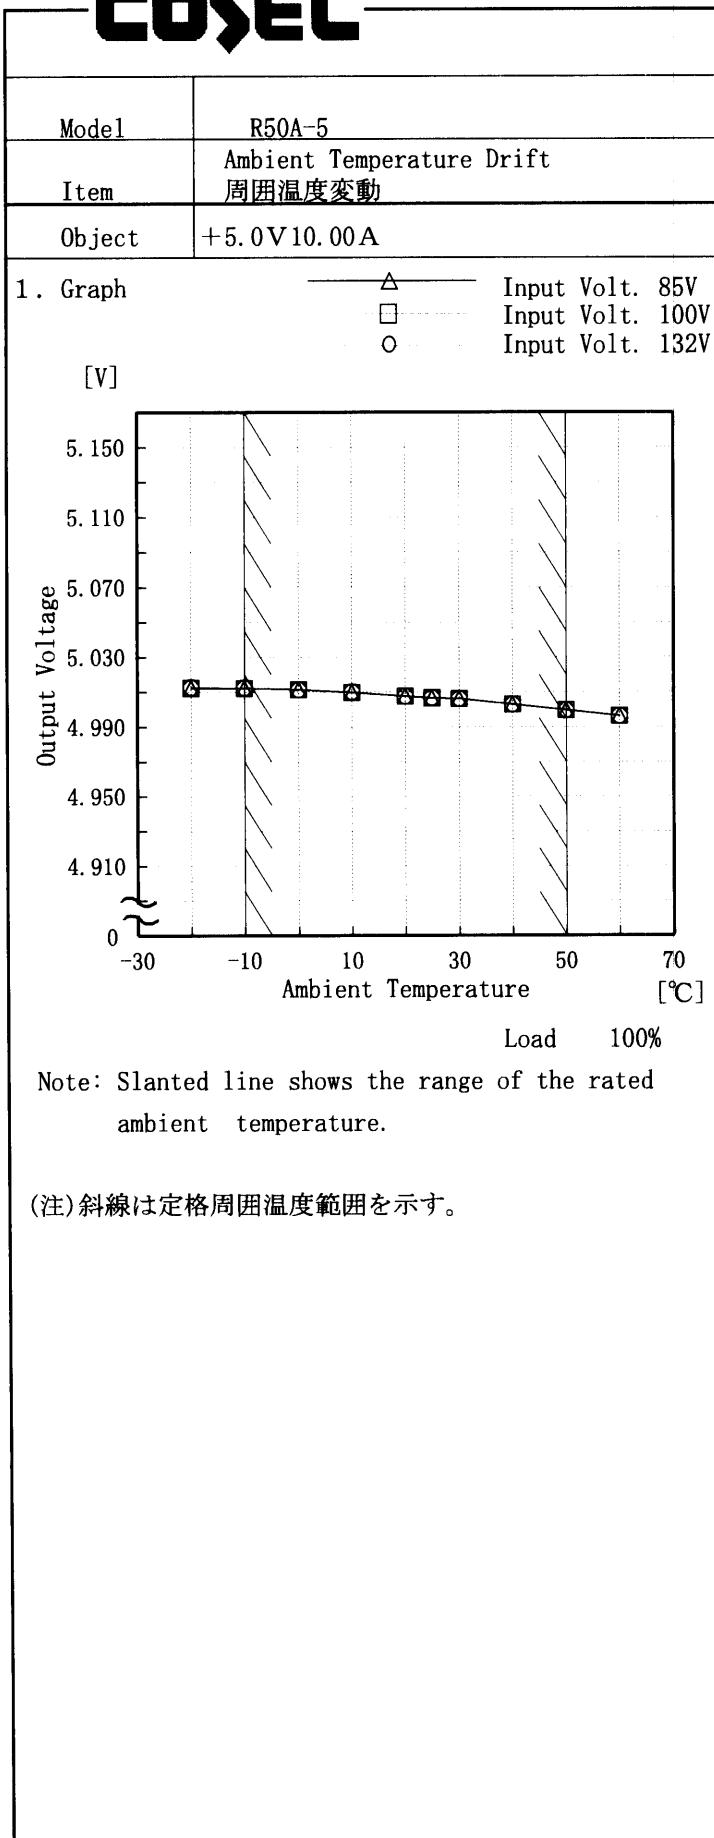**COSEL**


Testing Circuitry Figure A

## 2. Values

Temperature [°C]	Input Volt. 85[V]	Input Volt. 100[V]	Input Volt. 132[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-20	5.012	5.013	5.013
-10	5.012	5.012	5.012
0	5.011	5.011	5.011
10	5.010	5.010	5.010
20	5.008	5.008	5.008
25	5.007	5.007	5.007
30	5.006	5.006	5.006
40	5.003	5.003	5.003
50	5.000	5.000	5.000
60	4.996	4.996	4.996
—	—	—	—

COSEL

Model	R50A-5
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+5.0V 10.00A

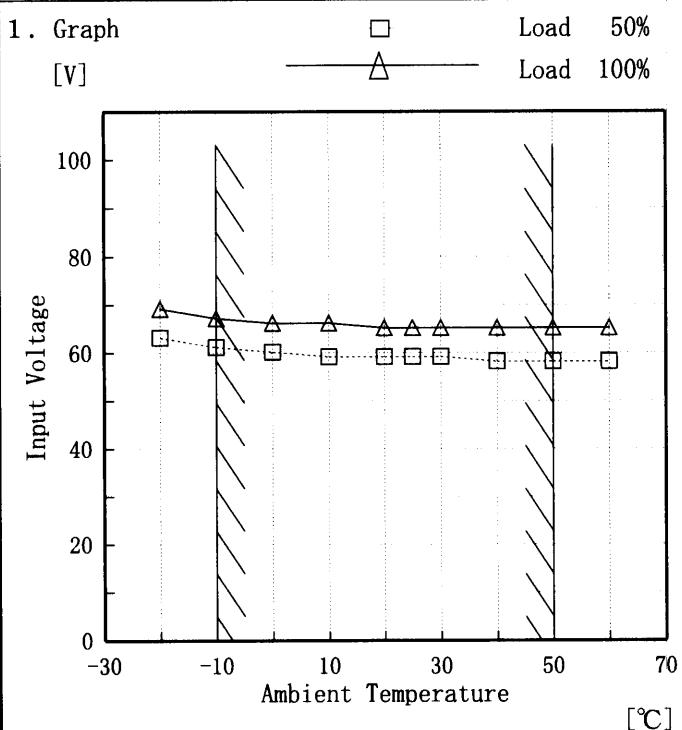

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A


2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-20	63	69
-10	61	67
0	60	66
10	59	66
20	59	65
25	59	65
30	59	65
40	58	65
50	58	65
60	58	65
—	—	—

**COSEL**

Model	R50A-5
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)

Object	+5V 10.00A
--------	------------

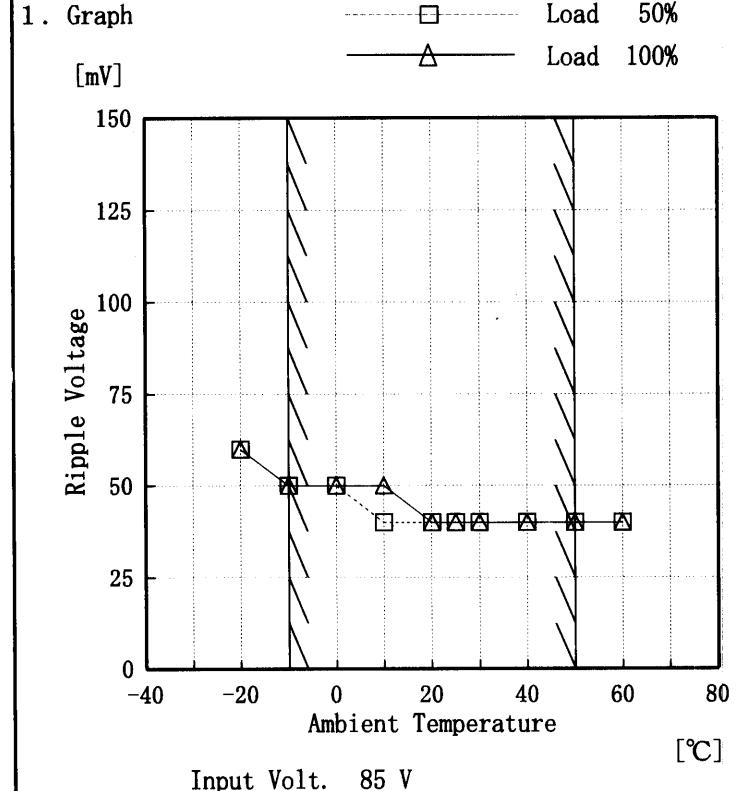

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry      Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-20	60	60
-10	50	50
0	50	50
10	40	50
20	40	40
25	40	40
30	40	40
40	40	40
50	40	40
60	40	40
—	—	—

**COSEL**

Model	R50A-5	Temperature	25 °C																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+5.0V 10.00A																								
1. Graph																									
<p>[V]</p> <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 100V Load 100%</p>																									
2. Values			<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5.009</td></tr> <tr><td>0.5</td><td>5.007</td></tr> <tr><td>1.0</td><td>5.007</td></tr> <tr><td>2.0</td><td>5.007</td></tr> <tr><td>3.0</td><td>5.007</td></tr> <tr><td>4.0</td><td>5.007</td></tr> <tr><td>5.0</td><td>5.007</td></tr> <tr><td>6.0</td><td>5.007</td></tr> <tr><td>7.0</td><td>5.007</td></tr> <tr><td>8.0</td><td>5.007</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	5.009	0.5	5.007	1.0	5.007	2.0	5.007	3.0	5.007	4.0	5.007	5.0	5.007	6.0	5.007	7.0	5.007	8.0	5.007
Time since start [H]	Output Voltage [V]																								
0.0	5.009																								
0.5	5.007																								
1.0	5.007																								
2.0	5.007																								
3.0	5.007																								
4.0	5.007																								
5.0	5.007																								
6.0	5.007																								
7.0	5.007																								
8.0	5.007																								



Model	R50A-5	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+5.0V 10.00A	

#### Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 85~132 V

Load Current : 0.00~10.00 A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

#### 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -10~50 °C

入力電圧 85~132 V

負荷電流 0.00~10.00 A

\* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-10	132	0.00	5.029	±16	±0.4
Minimum Voltage	50	132	10.00	4.999		



Model	R50A-5		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+5V10.00A		

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics (Output Voltage, Ripple Voltage, Ripple noise) of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性（出力電圧、リップル、リップルノイズ）の測定を3度行い、異常のないことを確認する。

### 2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.029	40	50
	2	5.029	40	50
	3	5.029	40	50
Load 100 %	1	5.013	40	50
	2	5.013	40	50
	3	5.013	40	50

Input Volt. 100 V



Model	R50A-5	
Item	Leakage Current 漏洩電流	Testing Circuitry Figure A
Object	+5.0V 10.00A	

### 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132[V]
(A) DENTORI	0.20	0.24	0.31
(B) U L	0.20	0.24	0.30
(C) C S A	0.20	0.24	0.30

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 220 [V]	Input Volt. 264 [V]
(D) V D E	-	-	-

### 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力の両相について測定し、その大きい方を漏洩電流測定値とする。

Load 100 %

(A) Input Resistance :1KΩ

(B) Input Resistance :1.5KΩ  
Input Capacitance :0.15 μF

(C) Input Resistance :1.5KΩ  
Input Capacitance :0.15 μF

(D) Input Resistance :2KΩ  
Input Capacitance :0.1 μF



Model	R50A-5	Testing Circuitry Figure A
Item	Line Noise Tolerance 入力雑音耐量	
Object	+5V 10.00A	

## 1. Results

Pulse Width [nS]	MODE	Operating Point of Overvoltage Protection [V] 過電圧保護動作値	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	6.5	no regulation
	NORMAL	6.5	no regulation
1000	COMMON	6.5	no regulation
	NORMAL	6.5	no regulation

## Conditions

Input Voltage : 100 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration: 1 min. or more  
 Load : 100 %

Model	R50A-5	Testing Circuitry Figure D
Item	Conducted Emission 雑音端子電圧	
Object	+5V 10.00A	

## 1. Graph



## Remarks

Input Volt. 120 V  
Load 100 %

Note: Slanted line shows the range of Tolerance.

(注)斜線は許容値を示す。

NO	Standards	Standards Complied	Frequency [MHz]	Tolerance [dB/μV]
1	FCC class A		0.45~1.6	60
			1.6~30	69.5
2	FCC class B	○	0.45~30	48
3	VCCI -1		0.15~0.5	79
			0.5~30	73
4	VCCI -2	○	0.15~0.5	66~56
			0.5~5	56
			5~30	60
5	CISPR22-A		0.01~0.15	91~69.5
			0.15~0.5	66
			0.5~30	60
6	CISPR22-B		0.01~0.05	110
			0.05~0.15	90~80
			0.15~0.5	66~56
			0.5~5	56
			5~30	60

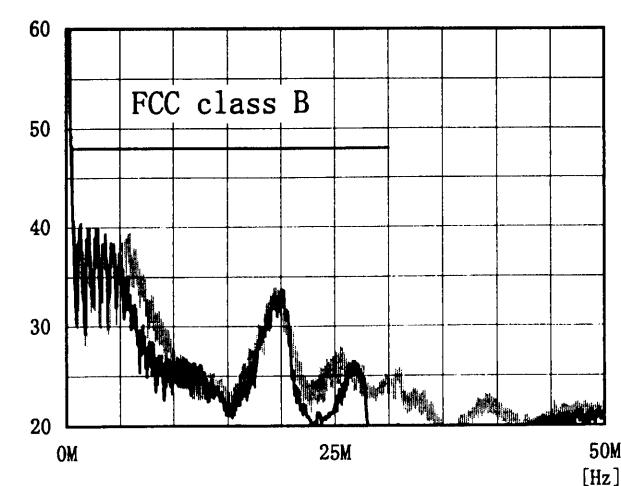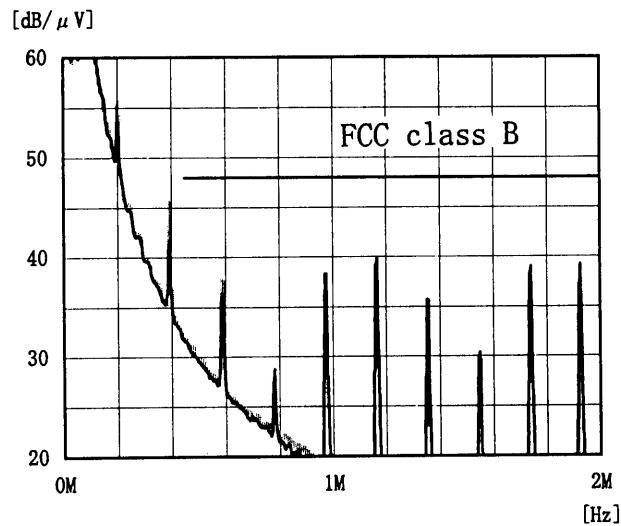

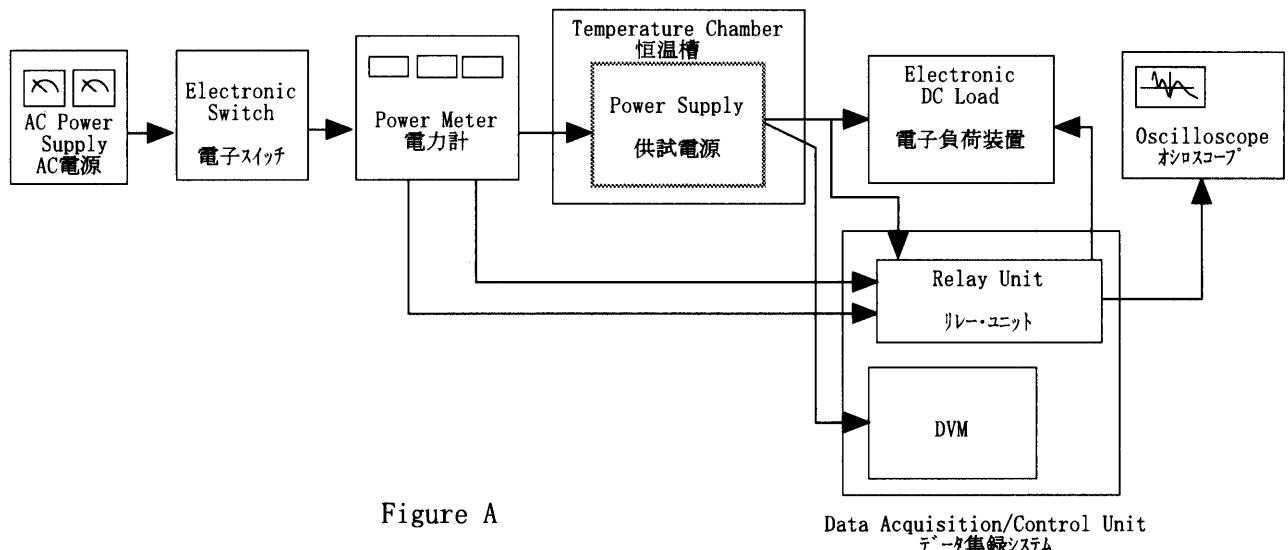


Figure A

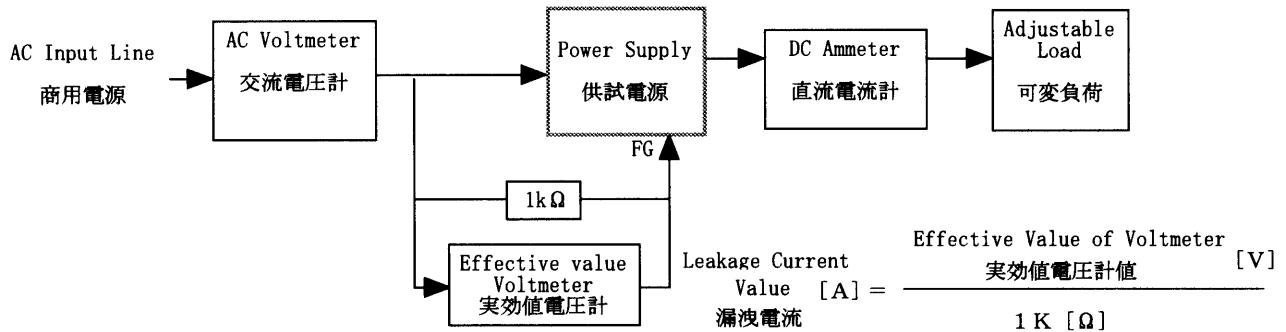
Data Acquisition/Control Unit  
データ集録システム

Figure B (DENTORI)

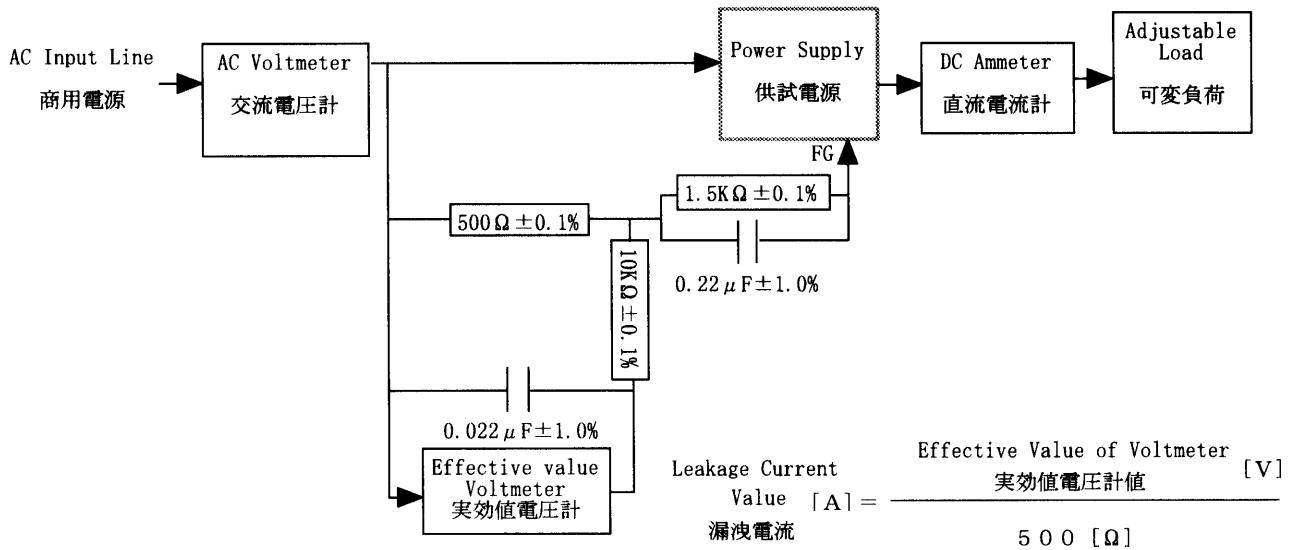


Figure B (UL, CSA, VDE)

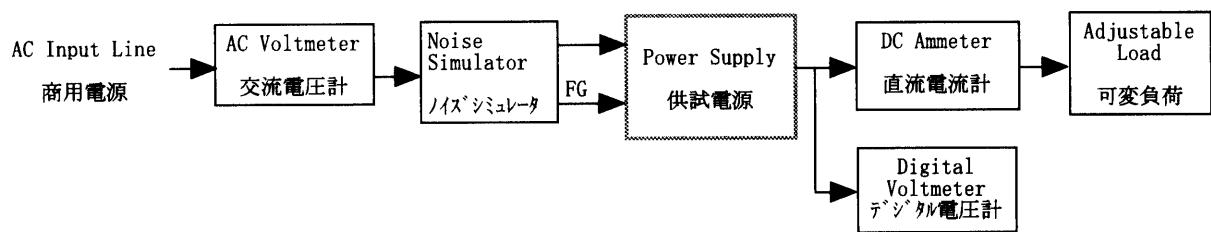


Figure C

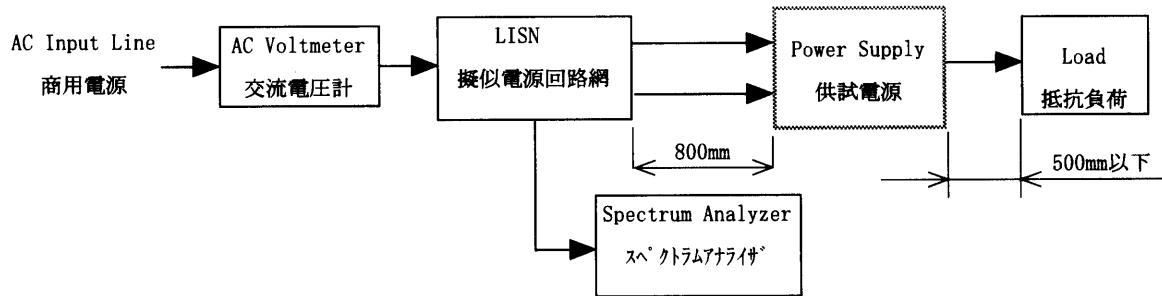


Figure D

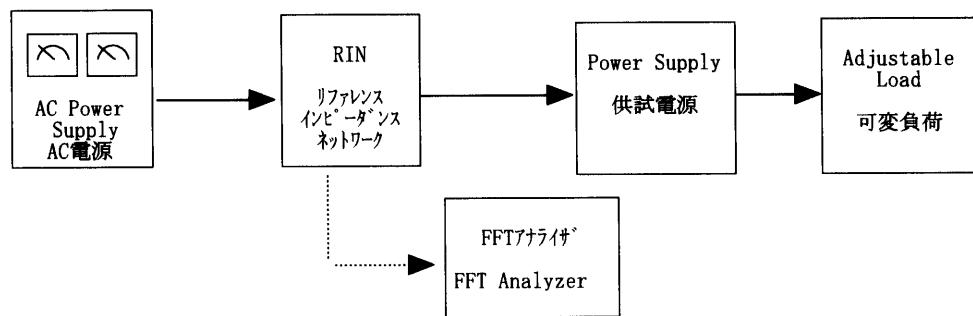


Figure E