

TEST DATA OF SUS1R5053R3

Regulated DC Power Supply
Sep 13, 2004

Approved by : Tetsuo Sugimori
Tetsuo Sugimori Design Manager

Prepared by : Masahiro Shima
Masahiro Shima Design Engineer

COSEL CO.,LTD.



CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

COSSEL


Model SUS1R5053R3

Item Input Current (by Input Voltage)

Object _____

1. Graph

— △ — Load 100%
 - - - □ - - Load 50%
 - - ○ - - Load 0%

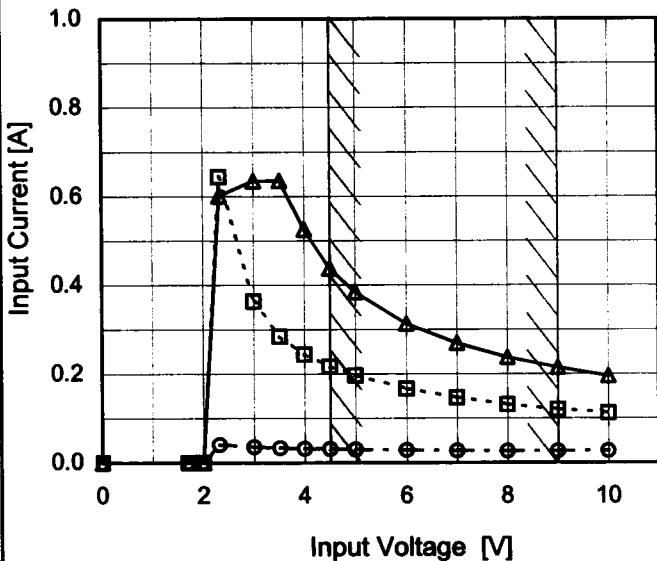

Note: Slanted line shows the range of the rated input voltage.

 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
1.7	0.000	0.000	0.000
2.0	0.000	0.000	0.000
2.3	0.040	0.644	0.601
3.0	0.035	0.364	0.635
3.5	0.033	0.285	0.636
4.0	0.032	0.245	0.526
4.5	0.031	0.217	0.438
5.0	0.030	0.197	0.385
6.0	0.028	0.166	0.314
7.0	0.027	0.147	0.270
8.0	0.026	0.131	0.238
9.0	0.026	0.120	0.215
10.0	0.026	0.112	0.195
-	-	-	-
-	-	-	-

COSEL

Model	SUS1R5053R3	Temperature	25°C																																																			
Item	Input Current (by Load Current)	Testing Circuitry	Figure A																																																			
Object	—	—	—																																																			
1. Graph		2. Values																																																				
<p>Graph showing Input Current [A] vs Load Current [A] for three input voltages: 4.5V, 5V, and 9V. The x-axis ranges from 0.00 to 0.40 A, and the y-axis ranges from 0.0 to 1.0 A. Three curves are plotted: a solid line for 4.5V, a dashed line for 5V, and a dash-dot line for 9V. All curves show an increasing trend. A slanted line indicates the rated load current range.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.030</td><td>0.029</td><td>0.026</td></tr> <tr><td>0.08</td><td>0.103</td><td>0.096</td><td>0.066</td></tr> <tr><td>0.16</td><td>0.179</td><td>0.163</td><td>0.102</td></tr> <tr><td>0.24</td><td>0.254</td><td>0.230</td><td>0.138</td></tr> <tr><td>0.32</td><td>0.341</td><td>0.305</td><td>0.175</td></tr> <tr><td>0.40</td><td>0.427</td><td>0.377</td><td>0.213</td></tr> <tr><td>0.44</td><td>0.477</td><td>0.420</td><td>0.233</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Current [A]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.030	0.029	0.026	0.08	0.103	0.096	0.066	0.16	0.179	0.163	0.102	0.24	0.254	0.230	0.138	0.32	0.341	0.305	0.175	0.40	0.427	0.377	0.213	0.44	0.477	0.420	0.233	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.030	0.029	0.026																																																			
0.08	0.103	0.096	0.066																																																			
0.16	0.179	0.163	0.102																																																			
0.24	0.254	0.230	0.138																																																			
0.32	0.341	0.305	0.175																																																			
0.40	0.427	0.377	0.213																																																			
0.44	0.477	0.420	0.233																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						

COSEL

Model	SUS1R5053R3	Temperature	25°C																																																			
Item	Input Power (by Load Current)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph																																																						
<p>—△— Input Volt. 4.5V - - -□- - Input Volt. 5V - - ○ - Input Volt. 9V</p>																																																						
2.Values																																																						
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.14</td><td>0.15</td><td>0.23</td></tr> <tr><td>0.08</td><td>0.47</td><td>0.48</td><td>0.59</td></tr> <tr><td>0.16</td><td>0.80</td><td>0.80</td><td>0.92</td></tr> <tr><td>0.24</td><td>1.15</td><td>1.15</td><td>1.25</td></tr> <tr><td>0.32</td><td>1.52</td><td>1.51</td><td>1.58</td></tr> <tr><td>0.40</td><td>1.92</td><td>1.89</td><td>1.91</td></tr> <tr><td>0.44</td><td>2.14</td><td>2.09</td><td>2.09</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	0.14	0.15	0.23	0.08	0.47	0.48	0.59	0.16	0.80	0.80	0.92	0.24	1.15	1.15	1.25	0.32	1.52	1.51	1.58	0.40	1.92	1.89	1.91	0.44	2.14	2.09	2.09	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	0.14	0.15	0.23																																																			
0.08	0.47	0.48	0.59																																																			
0.16	0.80	0.80	0.92																																																			
0.24	1.15	1.15	1.25																																																			
0.32	1.52	1.51	1.58																																																			
0.40	1.92	1.89	1.91																																																			
0.44	2.14	2.09	2.09																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
<p>Note: Slanted line shows the range of the rated load current.</p>																																																						

COSEL

Model	SUS1R5053R3
Item	Efficiency (by Input Voltage)
Object	_____

1. Graph

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
4.0	68.9	66.0
4.5	68.7	68.8
5.0	68.4	70.3
6.0	67.1	71.2
7.0	65.7	71.2
8.0	63.8	70.5
9.0	61.8	69.7
10.0	59.7	68.6
--	-	-

Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
4.0	68.9	66.0
4.5	68.7	68.8
5.0	68.4	70.3
6.0	67.1	71.2
7.0	65.7	71.2
8.0	63.8	70.5
9.0	61.8	69.7
10.0	59.7	68.6
--	-	-

COSEL

Model	SUS1R5053R3	Temperature	25°C																																																			
Item	Efficiency (by Load Current)	Testing Circuitry	Figure A																																																			
Object	<hr/>																																																					
1.Graph	<p>—▲— Input Volt. 4.5V - - -□- - Input Volt. 5V - - ○ - Input Volt. 9V</p> <table border="1"> <caption>Data points estimated from Graph 1</caption> <thead> <tr> <th>Load Current [A]</th> <th>4.5V (%)</th> <th>5V (%)</th> <th>9V (%)</th> </tr> </thead> <tbody> <tr><td>0.10</td><td>57.5</td><td>56.0</td><td>45.4</td></tr> <tr><td>0.16</td><td>66.8</td><td>66.3</td><td>57.9</td></tr> <tr><td>0.24</td><td>69.5</td><td>69.4</td><td>64.0</td></tr> <tr><td>0.32</td><td>69.8</td><td>70.4</td><td>67.4</td></tr> <tr><td>0.40</td><td>69.0</td><td>70.3</td><td>69.3</td></tr> <tr><td>0.44</td><td>68.2</td><td>69.8</td><td>70.0</td></tr> </tbody> </table>			Load Current [A]	4.5V (%)	5V (%)	9V (%)	0.10	57.5	56.0	45.4	0.16	66.8	66.3	57.9	0.24	69.5	69.4	64.0	0.32	69.8	70.4	67.4	0.40	69.0	70.3	69.3	0.44	68.2	69.8	70.0																							
Load Current [A]	4.5V (%)	5V (%)	9V (%)																																																			
0.10	57.5	56.0	45.4																																																			
0.16	66.8	66.3	57.9																																																			
0.24	69.5	69.4	64.0																																																			
0.32	69.8	70.4	67.4																																																			
0.40	69.0	70.3	69.3																																																			
0.44	68.2	69.8	70.0																																																			
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 4.5[V]</th> <th>Input Volt. 5[V]</th> <th>Input Volt. 9[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>0.08</td><td>57.5</td><td>56.0</td><td>45.4</td></tr> <tr><td>0.16</td><td>66.8</td><td>66.3</td><td>57.9</td></tr> <tr><td>0.24</td><td>69.5</td><td>69.4</td><td>64.0</td></tr> <tr><td>0.32</td><td>69.8</td><td>70.4</td><td>67.4</td></tr> <tr><td>0.40</td><td>69.0</td><td>70.3</td><td>69.3</td></tr> <tr><td>0.44</td><td>68.2</td><td>69.8</td><td>70.0</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>—</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Load Current [A]	Efficiency [%]			Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]	0.00	-	-	-	0.08	57.5	56.0	45.4	0.16	66.8	66.3	57.9	0.24	69.5	69.4	64.0	0.32	69.8	70.4	67.4	0.40	69.0	70.3	69.3	0.44	68.2	69.8	70.0	—	-	-	-	—	-	-	-	—	-	-	-	—	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]																																																			
0.00	-	-	-																																																			
0.08	57.5	56.0	45.4																																																			
0.16	66.8	66.3	57.9																																																			
0.24	69.5	69.4	64.0																																																			
0.32	69.8	70.4	67.4																																																			
0.40	69.0	70.3	69.3																																																			
0.44	68.2	69.8	70.0																																																			
—	-	-	-																																																			
—	-	-	-																																																			
—	-	-	-																																																			
—	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

COSEL


Model SUS1R5053R3

Item Line Regulation

Object +3.3V0.4A

1. Graph

---□--- Load 50%
 —△— Load 100%

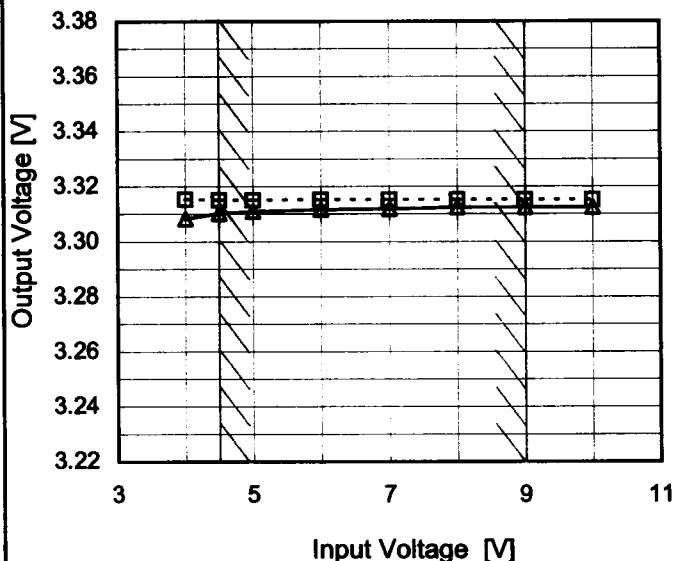

Note: Slanted line shows the range of the rated input voltage.

Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
4.0	3.315	3.308
4.5	3.315	3.310
5.0	3.315	3.311
6.0	3.315	3.312
7.0	3.315	3.312
8.0	3.315	3.312
9.0	3.315	3.313
10.0	3.315	3.312
--	-	-


COSEL

Model	SUS1R5053R3	Temperature Testing Circuitry 25°C Figure A																															
Item	Load Regulation																																
Object	+3.3V0.4A																																
1.Graph	<p>—△— Input Volt. 4.5V - -□--- Input Volt. 5V - -○--- Input Volt. 9V</p> <table border="1"> <caption>Data points estimated from Graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Output Voltage [V] (4.5V)</th> <th>Output Voltage [V] (5V)</th> <th>Output Voltage [V] (9V)</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>3.318</td><td>3.318</td><td>3.318</td></tr> <tr><td>0.08</td><td>3.317</td><td>3.317</td><td>3.317</td></tr> <tr><td>0.16</td><td>3.316</td><td>3.316</td><td>3.316</td></tr> <tr><td>0.24</td><td>3.314</td><td>3.314</td><td>3.314</td></tr> <tr><td>0.32</td><td>3.313</td><td>3.313</td><td>3.313</td></tr> <tr><td>0.40</td><td>3.310</td><td>3.311</td><td>3.312</td></tr> <tr><td>0.44</td><td>3.308</td><td>3.309</td><td>3.311</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V] (4.5V)	Output Voltage [V] (5V)	Output Voltage [V] (9V)	0.00	3.318	3.318	3.318	0.08	3.317	3.317	3.317	0.16	3.316	3.316	3.316	0.24	3.314	3.314	3.314	0.32	3.313	3.313	3.313	0.40	3.310	3.311	3.312	0.44	3.308	3.309	3.311
Load Current [A]	Output Voltage [V] (4.5V)	Output Voltage [V] (5V)	Output Voltage [V] (9V)																														
0.00	3.318	3.318	3.318																														
0.08	3.317	3.317	3.317																														
0.16	3.316	3.316	3.316																														
0.24	3.314	3.314	3.314																														
0.32	3.313	3.313	3.313																														
0.40	3.310	3.311	3.312																														
0.44	3.308	3.309	3.311																														
2.Values																																	

Note: Slanted line shows the range of the rated load current.

Load Current [A]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
0.00	3.318	3.318	3.318
0.08	3.317	3.317	3.317
0.16	3.316	3.316	3.316
0.24	3.314	3.314	3.314
0.32	3.313	3.313	3.313
0.40	3.310	3.311	3.312
0.44	3.308	3.309	3.311
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

COSEL

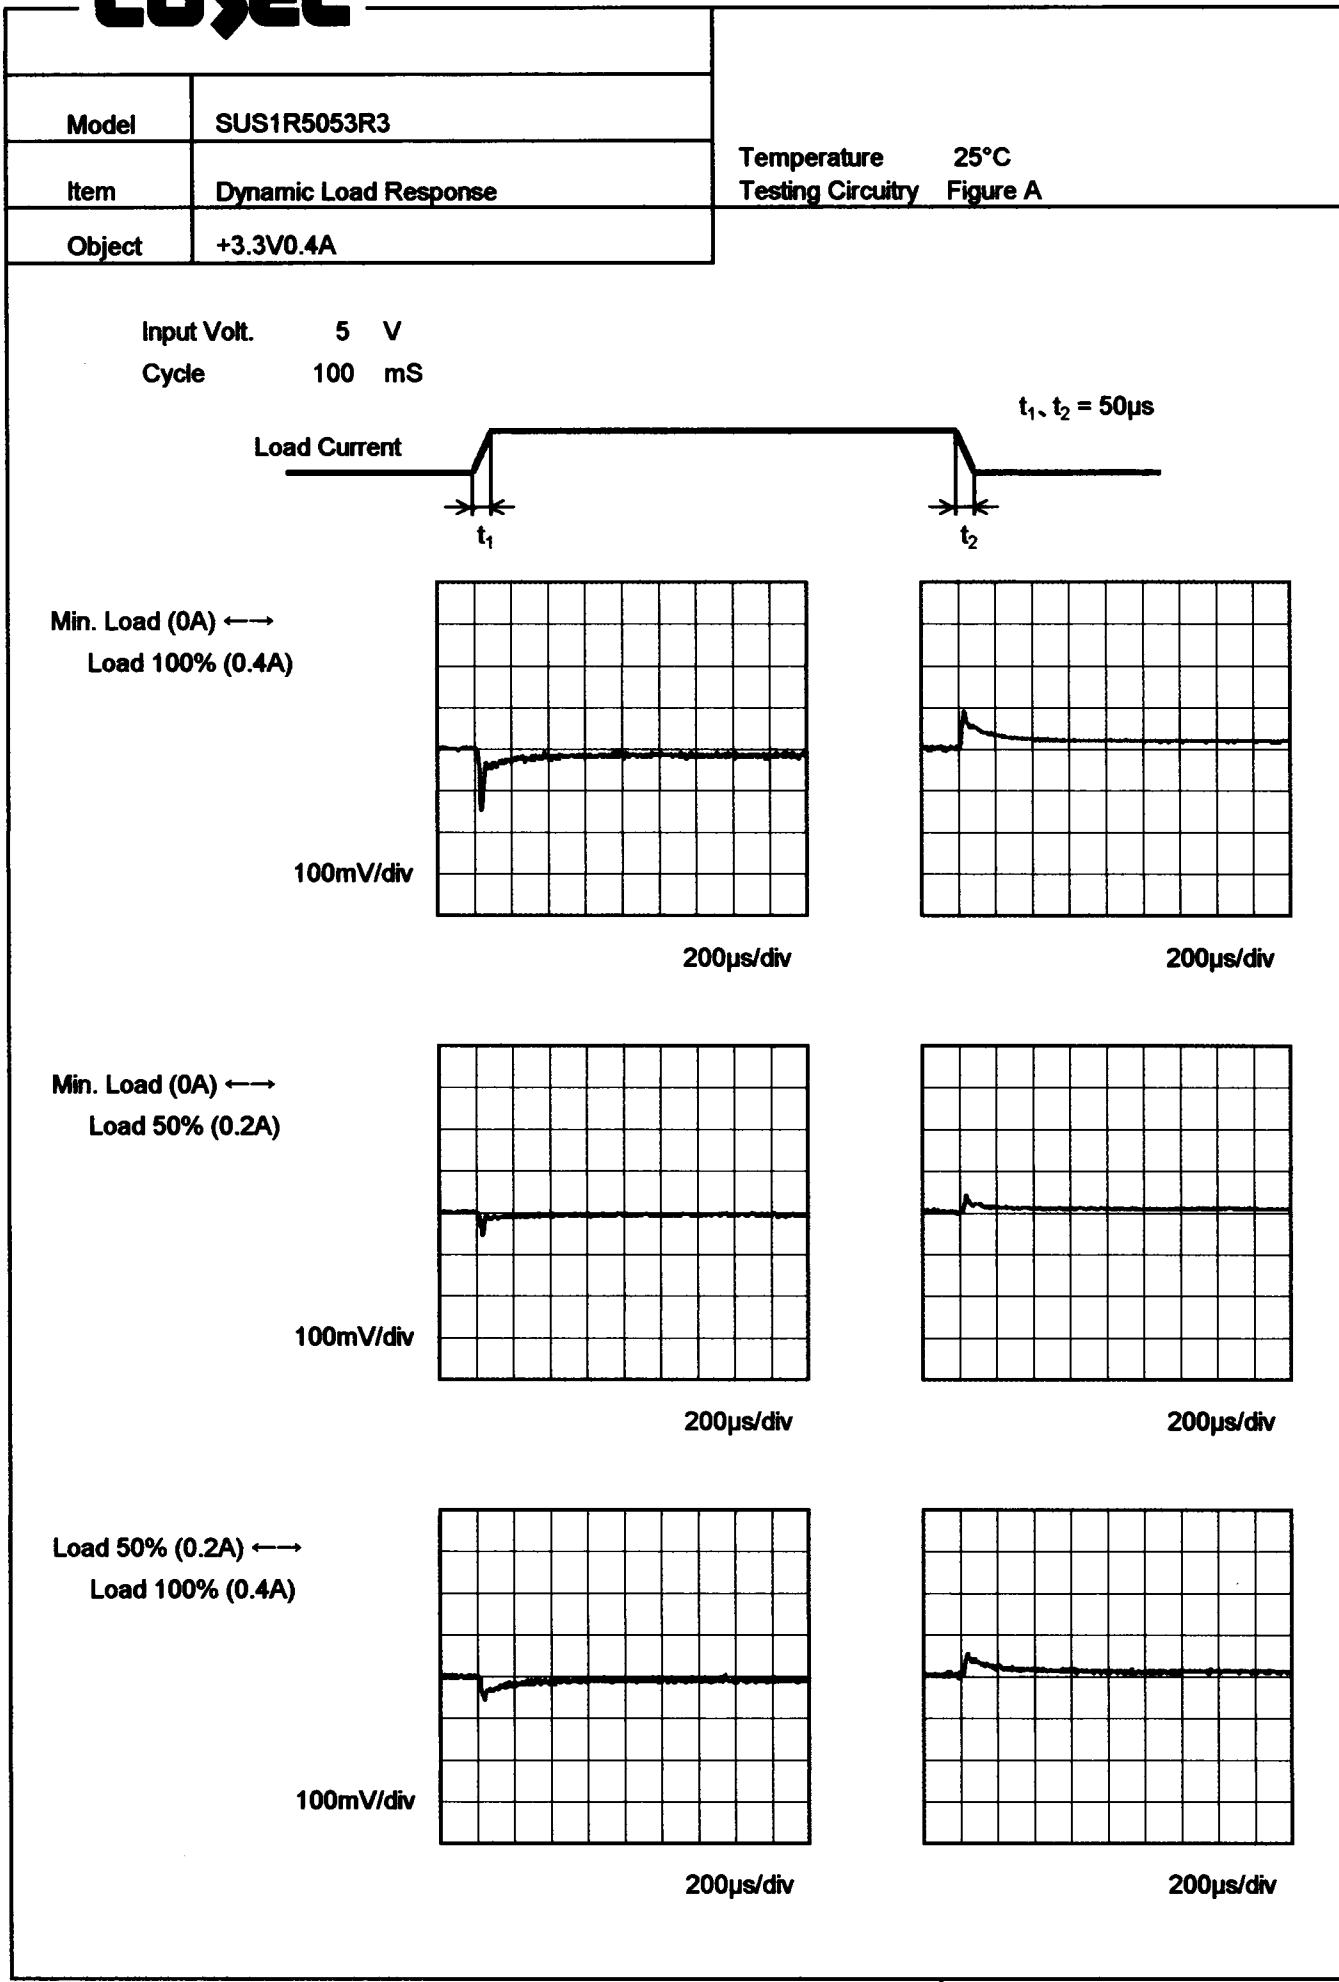


COSEL

Model	SUS1R5053R3
Item	Ripple Voltage (by Load Current)
Object	+3.3V0.4A

Temperature 25°C
Testing Circuitry Figure B

1. Graph

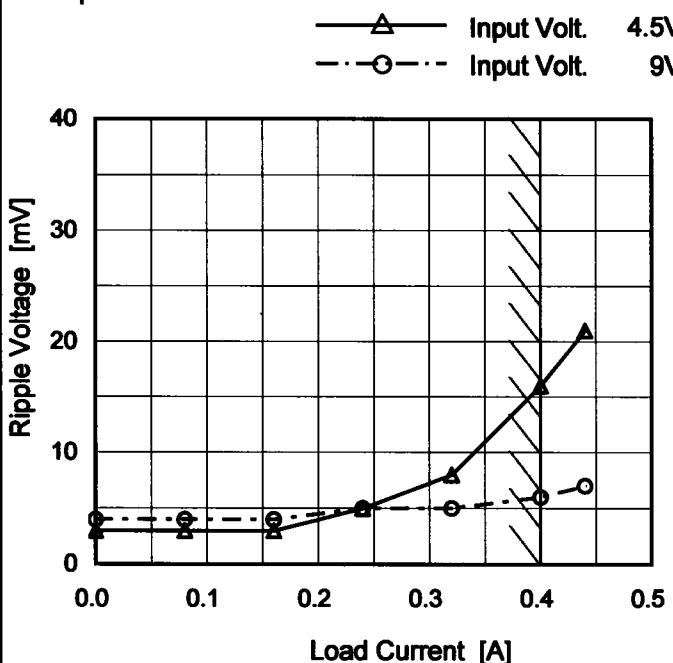

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	3	4
0.08	3	4
0.16	3	4
0.24	5	5
0.32	8	5
0.40	16	6
0.44	21	7
-	-	-
-	-	-
-	-	-
-	-	-

Measured by 100 MHz Oscilloscope.

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Ripple [mVp-p]

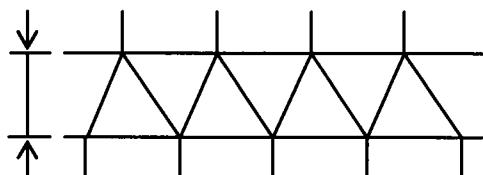


Fig.Complex Ripple Wave Form

COSEL


Model SUS1R5053R3

Item Ripple-Noise

Object +3.3V0.4A

1. Graph

—△— Input Volt. 4.5V
 -○--- Input Volt. 9V

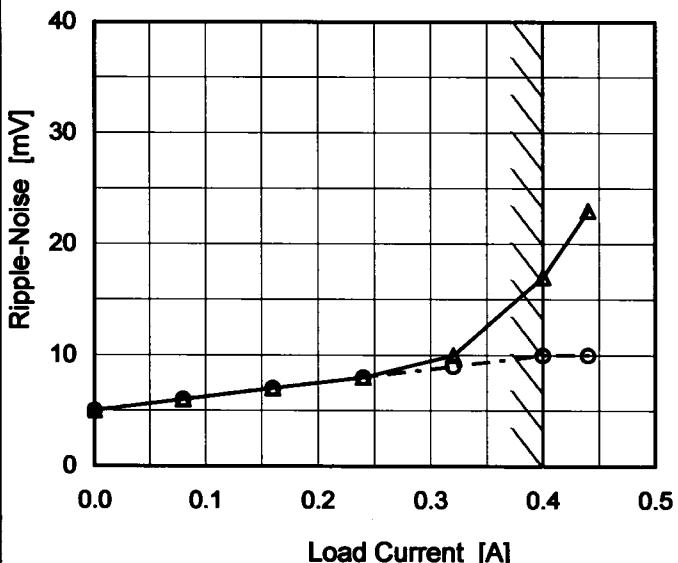

Measured by 100 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure B

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 4.5 [V]	Input Volt. 9 [V]
0.00	5	5
0.08	6	6
0.16	7	7
0.24	8	8
0.32	10	9
0.40	17	10
0.44	23	10
-	-	-
-	-	-
-	-	-
-	-	-


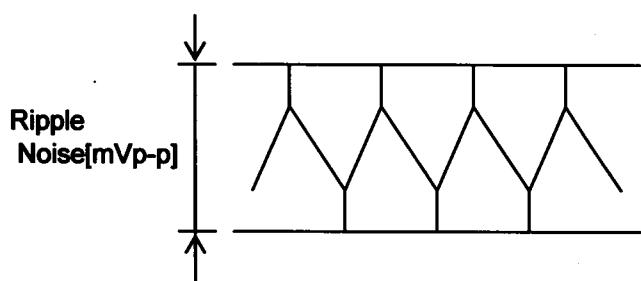


Fig.Complex Ripple Noise Wave Form

COSEL

Model	SUS1R5053R3
Item	Ripple Voltage (by Ambient Temp.)
Object	+3.3V0.4A

1. Graph

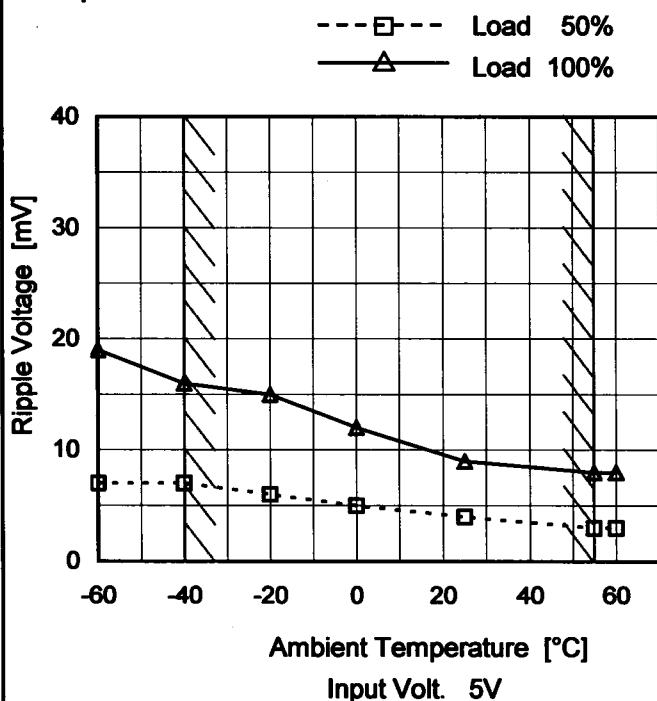

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.


Testing Circuitry Figure B

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-60	7	19
-40	7	16
-20	6	15
0	5	12
25	4	9
55	3	8
60	3	8
-	-	-
-	-	-
-	-	-
-	-	-

COSEL
Model SUS1R5053R3
Item Ambient Temperature Drift
Object +3.3V0.4A
1.Graph

- △— Input Volt. 4.5V
- - -□- - - Input Volt. 5V
- - ○ - - Input Volt. 9V

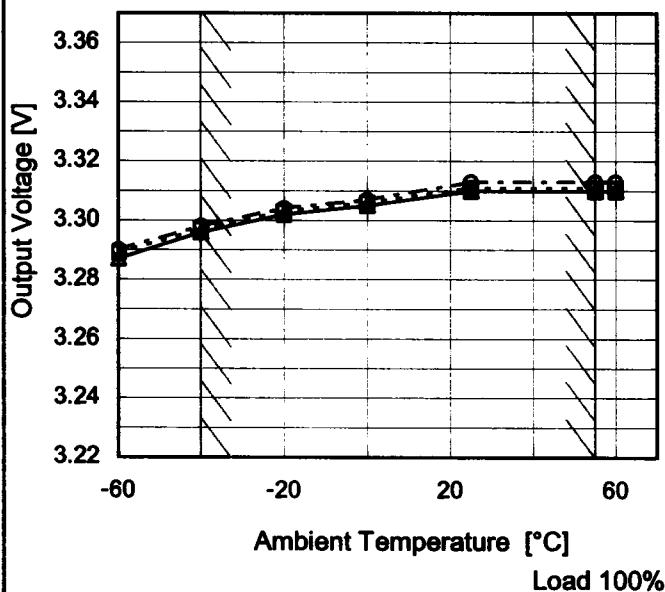

Note: Slanted line shows the range of the rated ambient temperature.

Testing Circuitry Figure A
2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
-60	3.287	3.289	3.290
-40	3.296	3.297	3.298
-20	3.302	3.303	3.304
0	3.305	3.306	3.307
25	3.310	3.311	3.313
55	3.310	3.311	3.313
60	3.310	3.311	3.313
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-



Model	SUS1R5053R3	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+3.3V0.4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 55°C

Input Voltage : 4.5 - 9V

Load Current : 0 - 0.4A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	55	5	0	3.318	±11	±0.3
Minimum Voltage	-40	4.5	0.4	3.296		

COSEL

Model	SUS1R5053R3
Item	Time Lapse Drift
Object	+3.3V0.4A

1.Graph

Output Voltage [V]	3.38 3.36 3.34 3.32 3.30 3.28 3.26 3.24 3.22
Time [H]	0 2 4 6 8 10

Input Volt. 5V
Load 100%

Temperature 25°C
Testing Circuitry Figure A

2.Values

Time since start [H]	Output Voltage [V]
0.0	3.304
0.5	3.305
1.0	3.305
2.0	3.305
3.0	3.304
4.0	3.304
5.0	3.304
6.0	3.304
7.0	3.305
8.0	3.305

COSEL


Model SUS1R5053R3

Item Rise and Fall Time

Object +3.3V0.4A


Temperature 25°C
Testing Circuitry Figure A

1. Graph

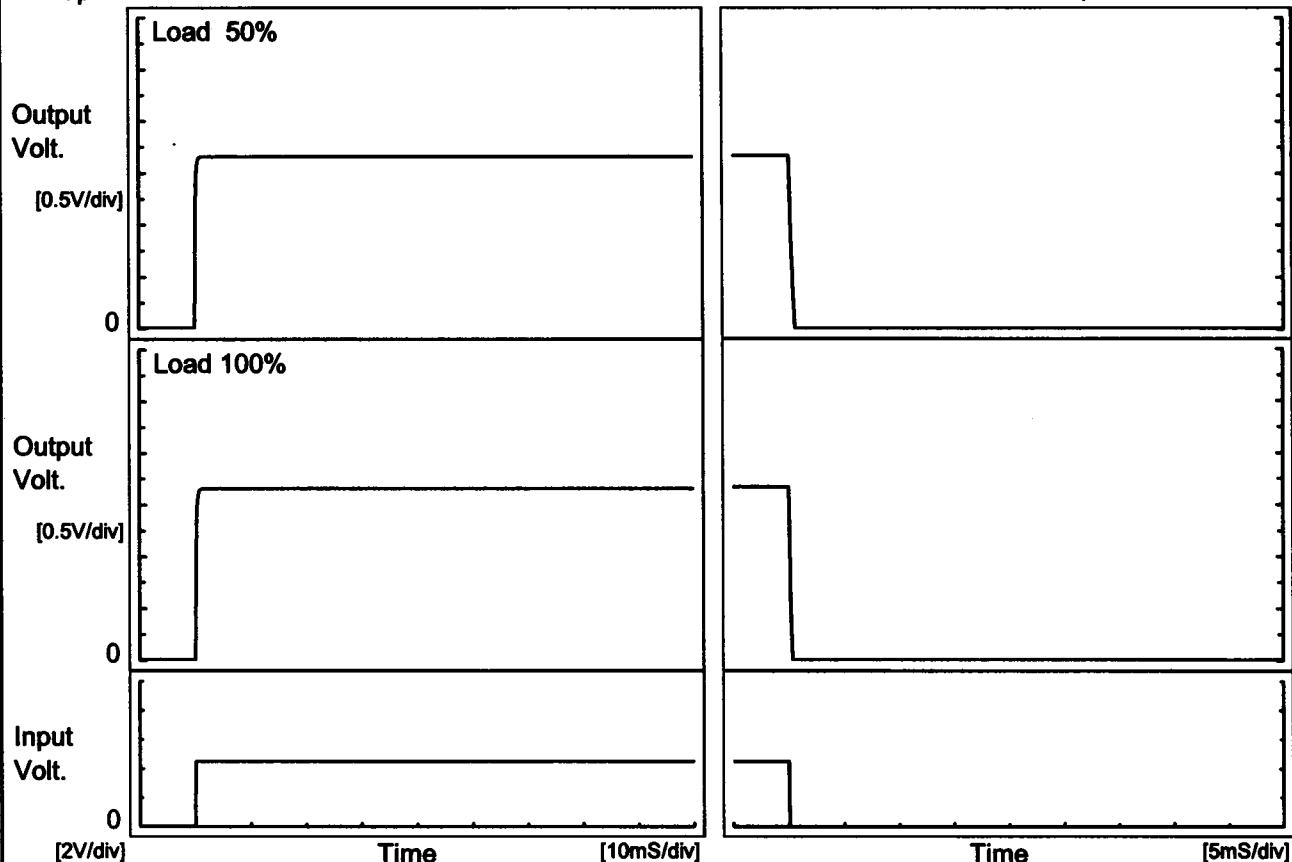

2. Values

Load	Time	Td	Tr	Ts	Th	Tf	[mS]
50 %		0.1	0.4	0.5	0.1	1.0	
100 %		0.1	0.4	0.5	0.0	0.5	

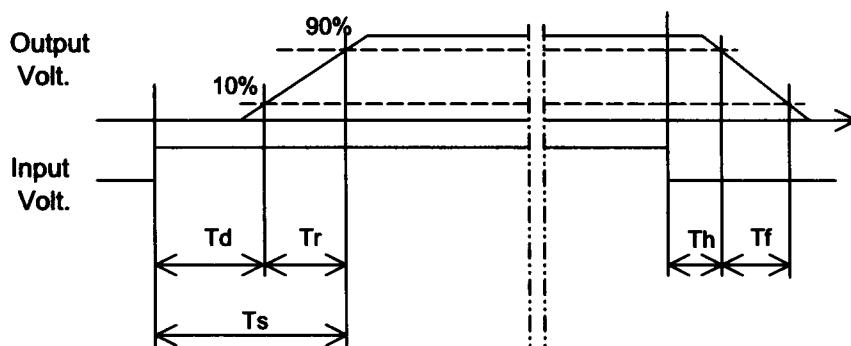

COSEL

<p>Model SUS1R5053R3</p> <p>Item Minimum Input Voltage for Regulated Output Voltage</p> <p>Object +3.3V0.4A</p>	Testing Circuitry Figure A																																						
	2.Values																																						
	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-60</td><td>2.2</td><td>3.1</td></tr> <tr><td>-40</td><td>2.1</td><td>3.2</td></tr> <tr><td>-20</td><td>2.2</td><td>3.2</td></tr> <tr><td>0</td><td>2.2</td><td>3.3</td></tr> <tr><td>25</td><td>2.2</td><td>3.4</td></tr> <tr><td>55</td><td>2.2</td><td>3.5</td></tr> <tr><td>60</td><td>2.3</td><td>3.5</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>		Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-60	2.2	3.1	-40	2.1	3.2	-20	2.2	3.2	0	2.2	3.3	25	2.2	3.4	55	2.2	3.5	60	2.3	3.5	--	-	-	--	-	-	--	-	-	--	-
Ambient Temperature [°C]	Input Voltage [V]																																						
	Load 50%	Load 100%																																					
-60	2.2	3.1																																					
-40	2.1	3.2																																					
-20	2.2	3.2																																					
0	2.2	3.3																																					
25	2.2	3.4																																					
55	2.2	3.5																																					
60	2.3	3.5																																					
--	-	-																																					
--	-	-																																					
--	-	-																																					
--	-	-																																					
<p>1.Graph</p> <p>Input Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Legend:</p> <ul style="list-style-type: none"> Load 50% (Dashed line with squares) Load 100% (Solid line with triangles) 																																							
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																							

COSEL

Model	SUS1R5053R3
Item	Overcurrent Protection
Object	+3.3V0.4A

1. Graph

Output Voltage [V]

Load Current [A]

Note: Slanted line shows the range of the rated load current.

Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 4.5[V]	Input Volt. 5[V]	Input Volt. 9[V]
3.300	0.40	0.40	0.40
3.135	0.54	0.58	0.54
2.970	0.56	0.59	0.55
2.640	0.59	0.62	0.56
2.310	0.62	0.65	0.58
1.980	0.66	0.69	0.58
1.650	0.69	0.71	0.59
1.320	0.71	0.74	0.59
0.990	0.74	0.76	0.58
0.660	0.75	0.76	0.55
0.330	0.74	0.74	0.52
0.000	0.74	0.80	0.54

COSEL

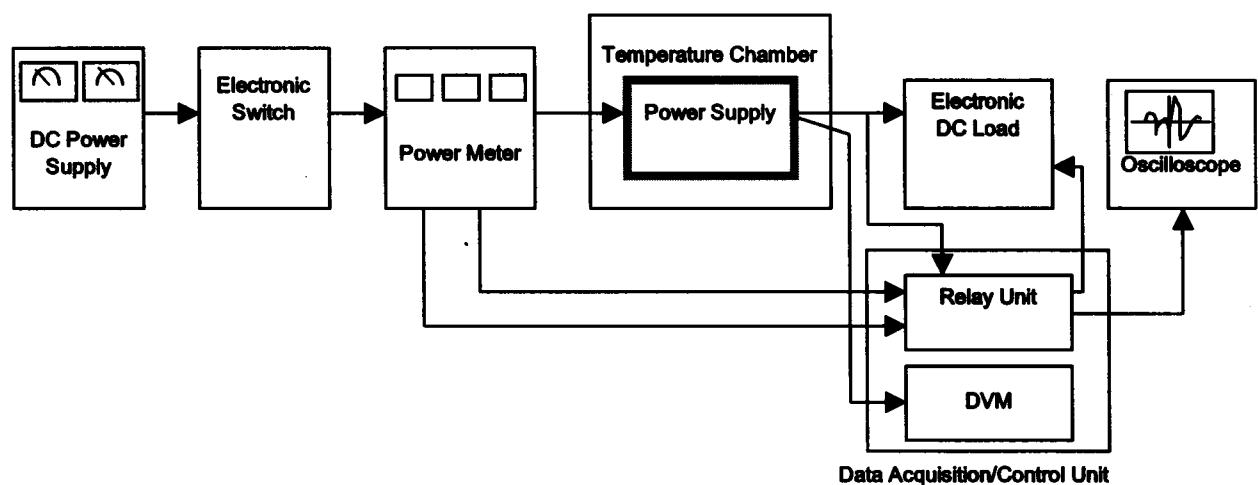


Figure A

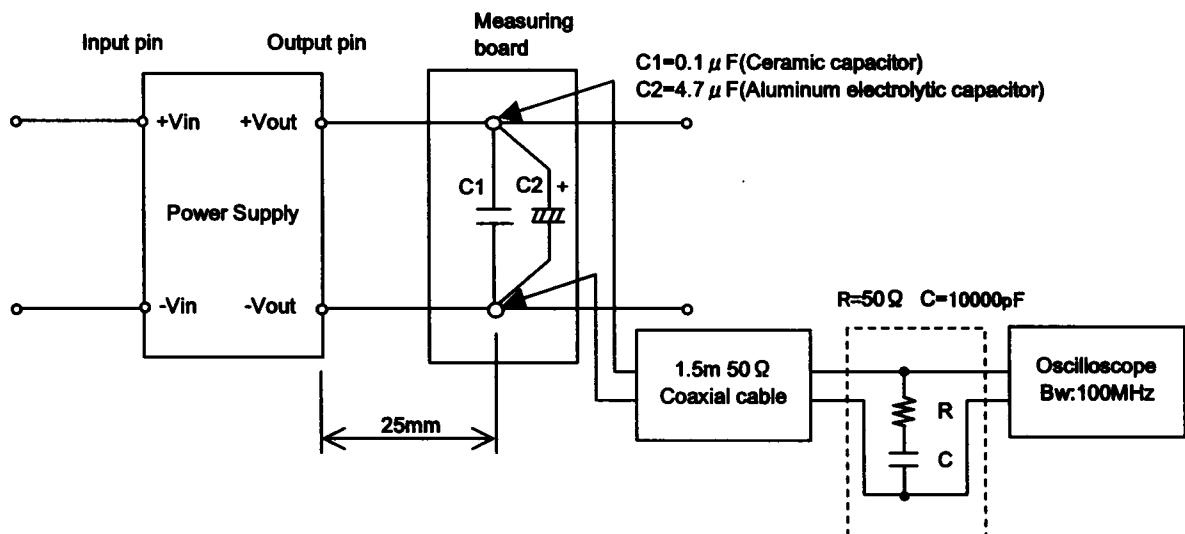


Figure B (Ripple and Ripple noise Characteristic)