

TEST DATA OF WMA350H-48

(230V INPUT)

Regulated DC Power Supply
December 5, 2019

Approved by :


Takashi Kajii
Design Manager

Prepared by :


Ryo Takahashi
Design Engineer

COSEL CO.,LTD.



CONTENTS

1.Input Current (by Load Current)	1
2.Input Power (by Load Current)	2
3.Efficiency (by Input Voltage)	3
4.Efficiency (by Load Current)	4
5.Power Factor (by Input Voltage)	5
6.Power Factor (by Load Current)	6
7.Inrush Current	7
8.Leakage Current	8
9.Line Regulation	9
10.Load Regulation	10
11.Dynamic Load Response	11
12.Ripple-Noise (by Load Current)	12
13.Ripple-Noise (by Ambient Temperature)	13
14.Ambient Temperature Drift	14
15.Output Voltage Accuracy	15
16.Time Lapse Drift	16
17.Rise and Fall Time	17
18.Hold-Up Time	18
19.Instantaneous Interruption Compensation	19
20.Minimum Input Voltage for Regulated Output Voltage	20
21.Overcurrent Protection	21
22.Overvoltage Protection	22
23.Figure of Testing Circuitry	23


(Final Page 23)

COSEL

Model	WMA350H-48
Item	Input Current (by Load Current)
Object	_____

1. Graph

—△— Input Volt. 200V
 - -□--- Input Volt. 230V
 - ·○--- Input Volt. 264V

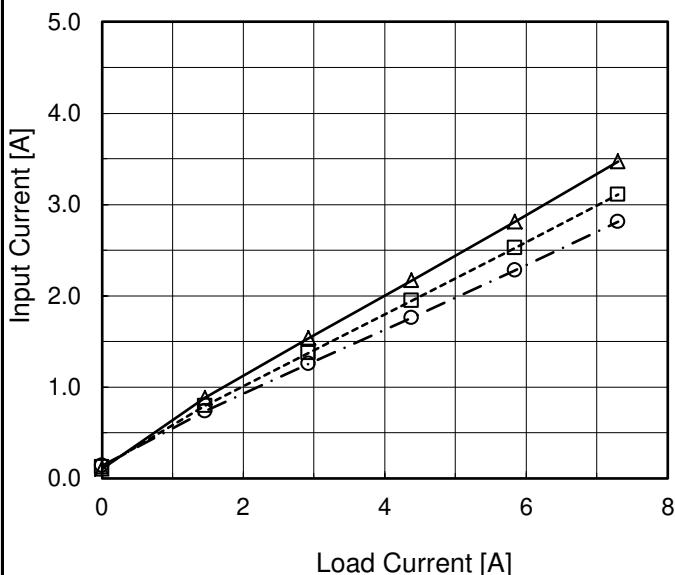
 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]
0.00	0.106	0.119	0.136
1.46	0.880	0.794	0.735
2.92	1.533	1.371	1.255
4.38	2.166	1.944	1.759
5.84	2.809	2.521	2.277
7.30	3.469	3.110	2.810
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL


Model WMA350H-48

Item Input Power (by Load Current)

Object _____

1. Graph

—△— Input Volt. 200V
 - - - □ - - Input Volt. 230V
 - · ○ - - Input Volt. 264V

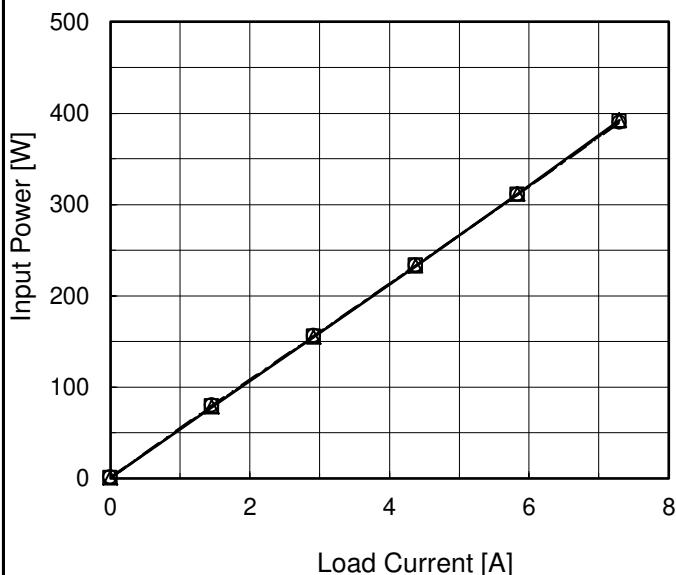
 Temperature 25°C
 Testing Circuitry Figure A


2. Values

Load Current [A]	Input Power [W]		
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]
0.00	0.6	0.6	0.8
1.46	78.0	78.7	79.8
2.92	154.6	155.2	155.9
4.38	232.5	233.0	233.0
5.84	311.6	311.0	311.0
7.30	392.0	391.0	390.0
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	WMA350H-48
Item	Efficiency (by Input Voltage)
Object	+48V7.3A

1. Graph

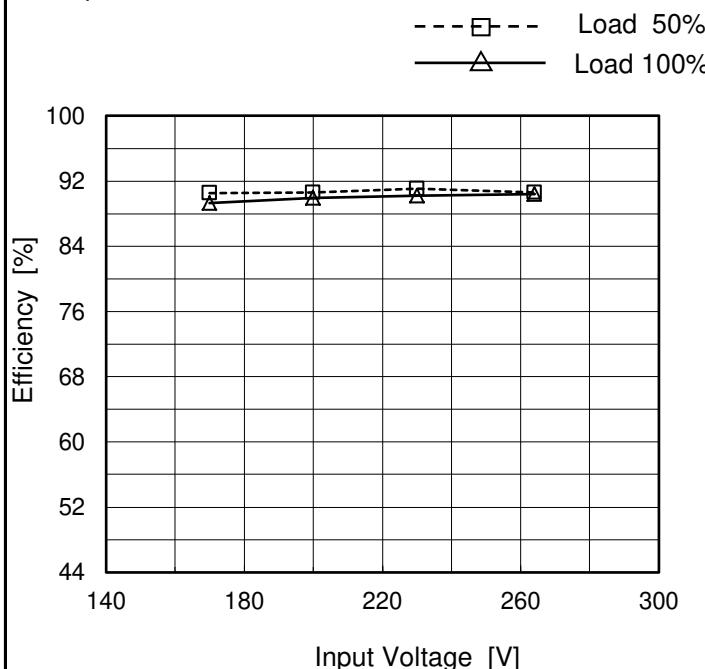
 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
170	90.5	89.3
200	90.6	90.0
230	91.1	90.2
264	90.6	90.4
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-


COSEL

Model	WMA350H-48																																																					
Item	Efficiency (by Load Current)	Temperature Testing Circuitry	25°C Figure A																																																			
Object	_____																																																					
1.Graph	_____		2.Values																																																			
<p>—△— Input Volt. 200V - - - □ - - Input Volt. 230V - · ○ - - Input Volt. 264V</p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [200V] (%)</th> <th>Efficiency [230V] (%)</th> <th>Efficiency [264V] (%)</th> </tr> </thead> <tbody> <tr><td>1.46</td><td>89.8</td><td>89.0</td><td>87.8</td></tr> <tr><td>2.92</td><td>91.0</td><td>90.7</td><td>90.3</td></tr> <tr><td>4.38</td><td>90.7</td><td>90.5</td><td>90.5</td></tr> <tr><td>5.84</td><td>90.1</td><td>90.3</td><td>90.3</td></tr> <tr><td>7.30</td><td>89.5</td><td>90.1</td><td>90.0</td></tr> </tbody> </table>				Load Current [A]	Efficiency [200V] (%)	Efficiency [230V] (%)	Efficiency [264V] (%)	1.46	89.8	89.0	87.8	2.92	91.0	90.7	90.3	4.38	90.7	90.5	90.5	5.84	90.1	90.3	90.3	7.30	89.5	90.1	90.0																											
Load Current [A]	Efficiency [200V] (%)	Efficiency [230V] (%)	Efficiency [264V] (%)																																																			
1.46	89.8	89.0	87.8																																																			
2.92	91.0	90.7	90.3																																																			
4.38	90.7	90.5	90.5																																																			
5.84	90.1	90.3	90.3																																																			
7.30	89.5	90.1	90.0																																																			
<table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>Efficiency [200V] (%)</th> <th>Efficiency [230V] (%)</th> <th>Efficiency [264V] (%)</th> </tr> </thead> <tbody> <tr><td>1.46</td><td>89.8</td><td>89.0</td><td>87.8</td></tr> <tr><td>2.92</td><td>91.0</td><td>90.7</td><td>90.3</td></tr> <tr><td>4.38</td><td>90.7</td><td>90.5</td><td>90.5</td></tr> <tr><td>5.84</td><td>90.1</td><td>90.3</td><td>90.3</td></tr> <tr><td>7.30</td><td>89.5</td><td>90.1</td><td>90.0</td></tr> </tbody> </table>				Load Current [A]	Efficiency [200V] (%)	Efficiency [230V] (%)	Efficiency [264V] (%)	1.46	89.8	89.0	87.8	2.92	91.0	90.7	90.3	4.38	90.7	90.5	90.5	5.84	90.1	90.3	90.3	7.30	89.5	90.1	90.0																											
Load Current [A]	Efficiency [200V] (%)	Efficiency [230V] (%)	Efficiency [264V] (%)																																																			
1.46	89.8	89.0	87.8																																																			
2.92	91.0	90.7	90.3																																																			
4.38	90.7	90.5	90.5																																																			
5.84	90.1	90.3	90.3																																																			
7.30	89.5	90.1	90.0																																																			
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>1.46</td><td>89.8</td><td>89.0</td><td>87.8</td></tr> <tr><td>2.92</td><td>91.0</td><td>90.7</td><td>90.3</td></tr> <tr><td>4.38</td><td>90.7</td><td>90.5</td><td>90.5</td></tr> <tr><td>5.84</td><td>90.1</td><td>90.3</td><td>90.3</td></tr> <tr><td>7.30</td><td>89.5</td><td>90.1</td><td>90.0</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Efficiency [%]			Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]	0.00	-	-	-	1.46	89.8	89.0	87.8	2.92	91.0	90.7	90.3	4.38	90.7	90.5	90.5	5.84	90.1	90.3	90.3	7.30	89.5	90.1	90.0	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]																																																			
0.00	-	-	-																																																			
1.46	89.8	89.0	87.8																																																			
2.92	91.0	90.7	90.3																																																			
4.38	90.7	90.5	90.5																																																			
5.84	90.1	90.3	90.3																																																			
7.30	89.5	90.1	90.0																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

COSEL

Model	WMA350H-48
Item	Power Factor (by Input Voltage)
Object	+48V7.3A

1.Graph

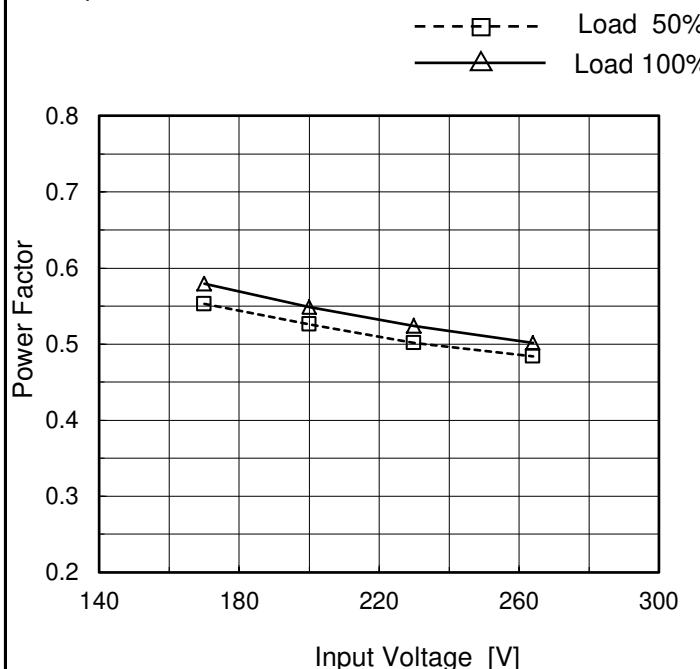

 Temperature 25°C
 Testing Circuitry Figure A

2.Values

Input Voltage [V]	Power Factor	
	Load 50%	Load 100%
170	0.553	0.580
200	0.526	0.549
230	0.501	0.524
264	0.484	0.501
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

Model	WMA350H-48
Item	Power Factor (by Load Current)
Object	_____

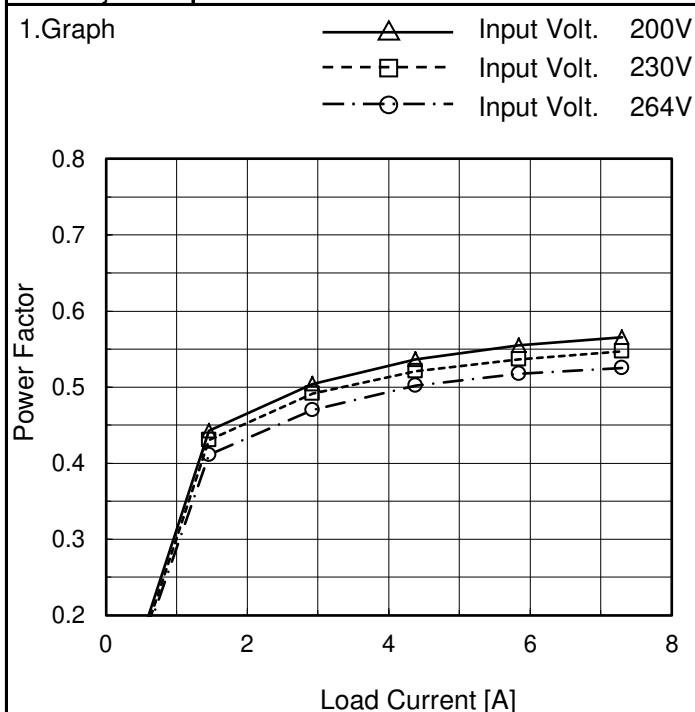

 Temperature 25°C
 Testing Circuitry Figure A

2. Values

Load Current [A]	Power Factor		
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]
0.00	0.029	0.021	0.022
1.46	0.443	0.431	0.411
2.92	0.504	0.492	0.470
4.38	0.537	0.521	0.502
5.84	0.555	0.536	0.517
7.30	0.565	0.547	0.526
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-


COSEL

Model	WMA350H-48	Temperature Testing Circuitry	25°C
Item	Inrush Current		Figure A
Object	_____		

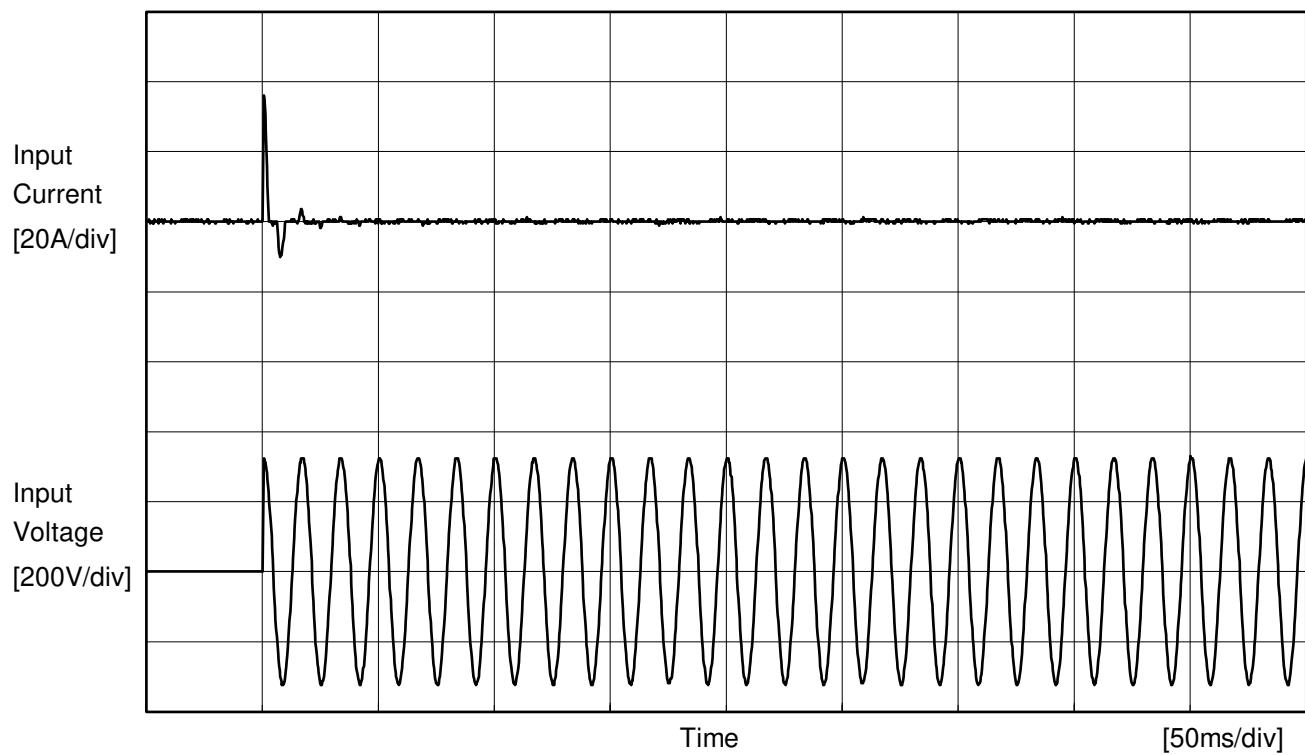

Input Voltage 230 V
 Frequency 60 Hz
 Load 100 %

Primary inrush current 36.0 A
 Secondary inrush current 1.2 A

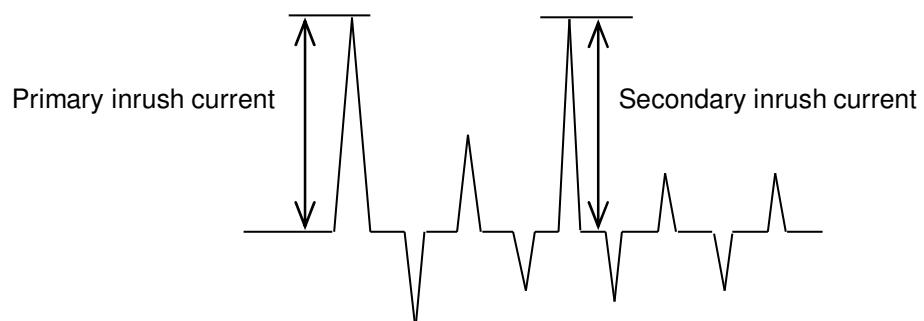



Model	WMA350H-48	Temperature	25°C
Item	Leakage Current	Testing Circuitry	Figure B
Object	<hr/>		

1. Results

Standards		Input Volt.			Note
		170 [V]	240 [V]	264 [V]	
IEC60601-1	Both phases	0.23	0.31	0.34	Operation
	One of phases	0.43	0.58	0.64	Stand by

The value for "One of phases" is the reference value only.

2. Condition


Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

COSEL

Model	WMA350H-48
Item	Line Regulation
Object	+48V7.3A

 Temperature 25°C
 Testing Circuitry Figure A

1. Graph

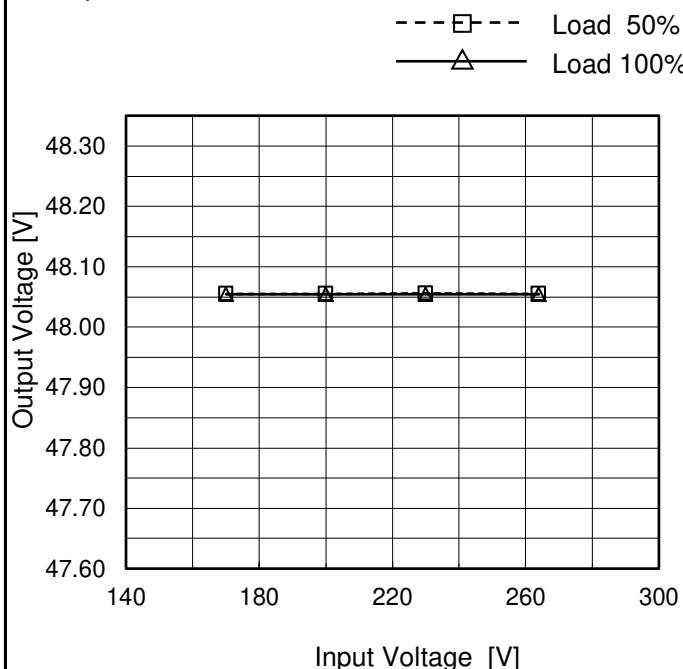

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
170	48.055	48.054
200	48.055	48.054
230	48.056	48.054
264	48.056	48.054
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL




Model	WMA350H-48	Temperature 25°C Testing Circuitry Figure A																																																					
Item	Load Regulation																																																						
Object	+48V7.3A																																																						
1.Graph	<p>—△— Input Volt. 200V ---□--- Input Volt. 230V -·○-· Input Volt. 264V</p>																																																						
	<p>48.40 48.30 48.20 48.10 48.00 47.90 47.80 47.70</p> <p>Output Voltage [V]</p> <p>0 2 4 6 8</p> <p>Load Current [A]</p>																																																						
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>48.067</td><td>48.067</td><td>48.067</td></tr> <tr> <td>1.46</td><td>48.066</td><td>48.066</td><td>48.067</td></tr> <tr> <td>2.92</td><td>48.066</td><td>48.066</td><td>48.066</td></tr> <tr> <td>4.38</td><td>48.065</td><td>48.065</td><td>48.065</td></tr> <tr> <td>5.84</td><td>48.064</td><td>48.065</td><td>48.065</td></tr> <tr> <td>7.30</td><td>48.062</td><td>48.063</td><td>48.063</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]	0.00	48.067	48.067	48.067	1.46	48.066	48.066	48.067	2.92	48.066	48.066	48.066	4.38	48.065	48.065	48.065	5.84	48.064	48.065	48.065	7.30	48.062	48.063	48.063	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																						
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]																																																				
0.00	48.067	48.067	48.067																																																				
1.46	48.066	48.066	48.067																																																				
2.92	48.066	48.066	48.066																																																				
4.38	48.065	48.065	48.065																																																				
5.84	48.064	48.065	48.065																																																				
7.30	48.062	48.063	48.063																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				
--	-	-	-																																																				

COSEL

Model	WMA350H-48
Item	Dynamic Load Response
Object	+48V7.3A

Temperature 25°C
Testing Circuitry Figure A


Input Volt. 230 V
Cycle 1000 ms

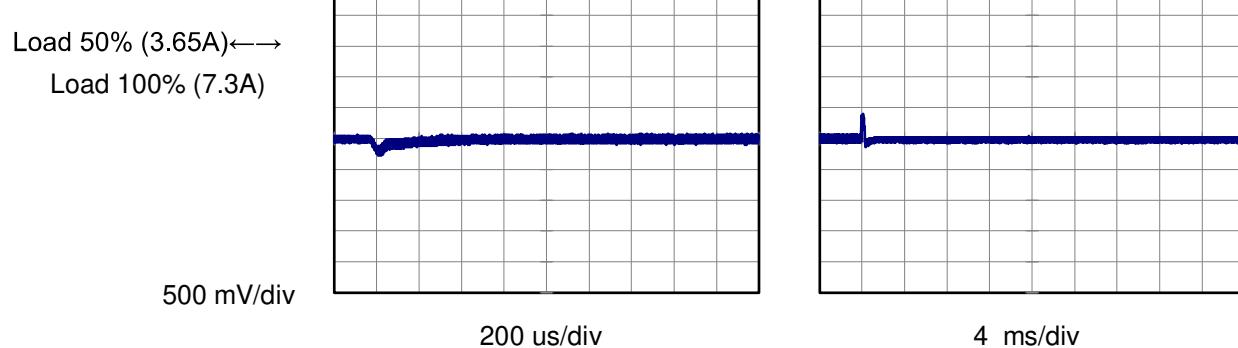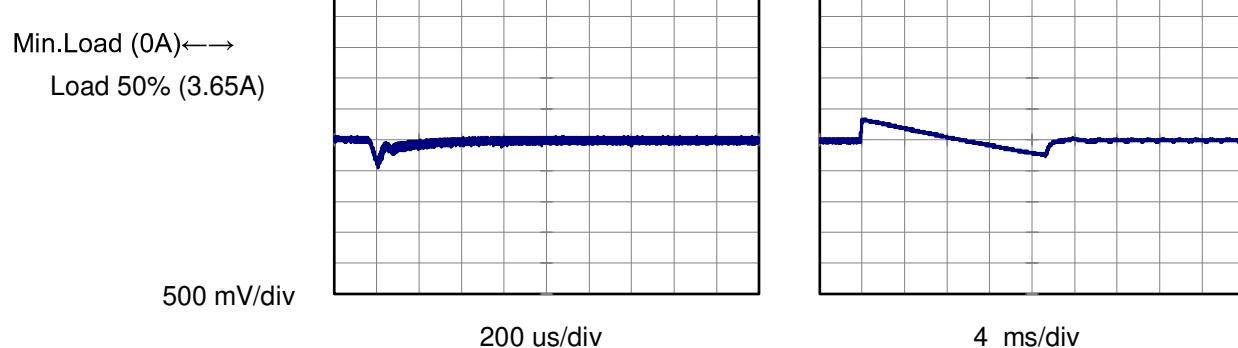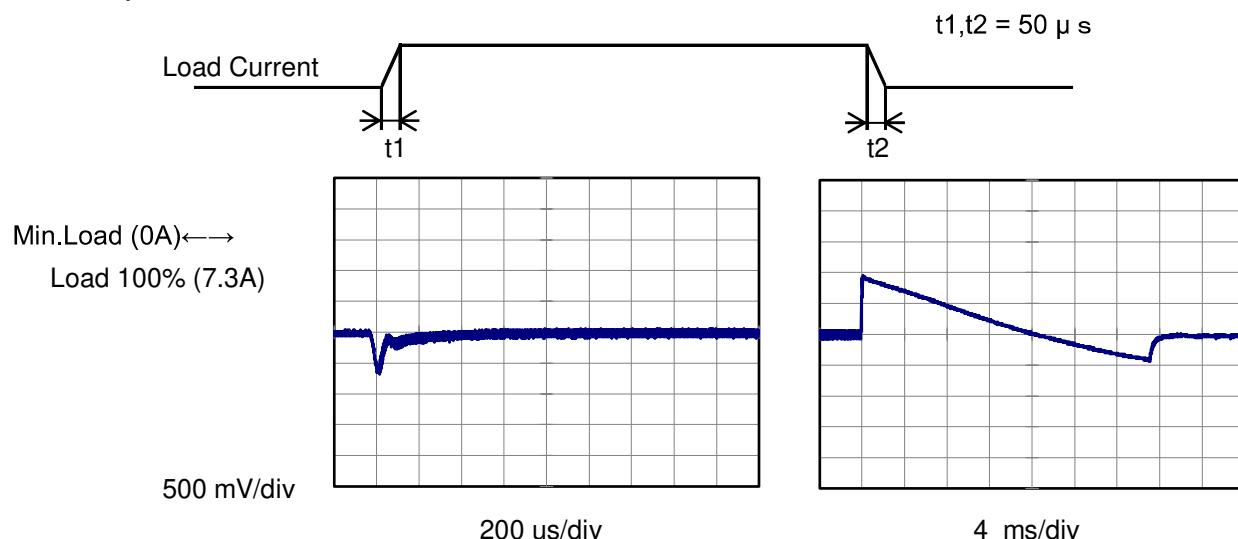

COSEL

Model	WMA350H-48
Item	Ripple Noise(by Load Current)
Object	+48V7.3A

1.Graph

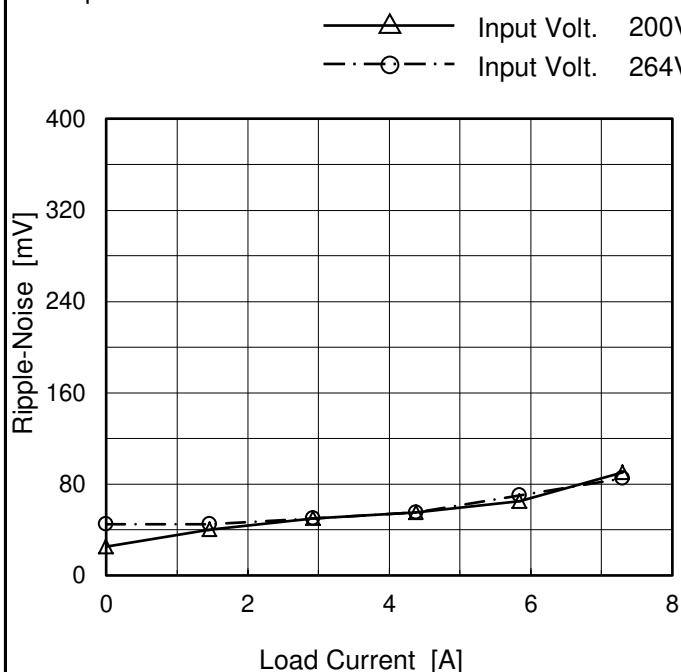

Measured by 20 MHz Oscilloscope.

Ripple-Noise is shown as p-p in the figure below.

 Temperature 25°C
 Testing Circuitry Figure C

2.Values

Load Current [A]	Ripple Noise [mV]	
	Input Volt. 200 [V]	Input Volt. 264 [V]
0.00	25	45
1.46	40	45
2.92	50	50
4.38	55	55
5.84	65	70
7.30	90	85
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-


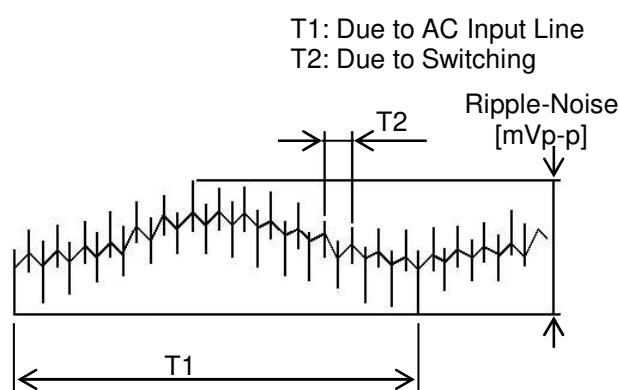


Fig. Complex Ripple Wave Form

COSEL

Model	WMA350H-48
Item	Ripple Noise (by Ambient Temp.)
Object	+48V7.3A

1.Graph

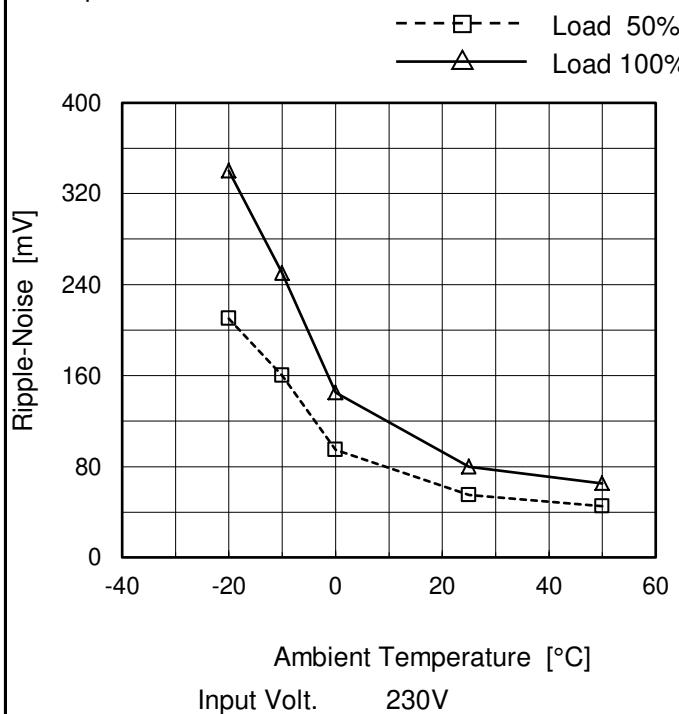

Measured by 20 MHz Oscilloscope.

Testing Circuitry Figure C

2.Values

Ambient Temperature [°C]	Ripple Noise [mV]	
	Load 50%	Load 100%
-20	210	340
-10	160	250
0	95	145
25	55	80
50	45	65
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL


Model WMA350H-48

Item Ambient Temperature Drift

Object +48V7.3A

1.Graph

—△— Input Volt. 200V
 - - - □ - - Input Volt. 230V
 - · ○ - - Input Volt. 264V

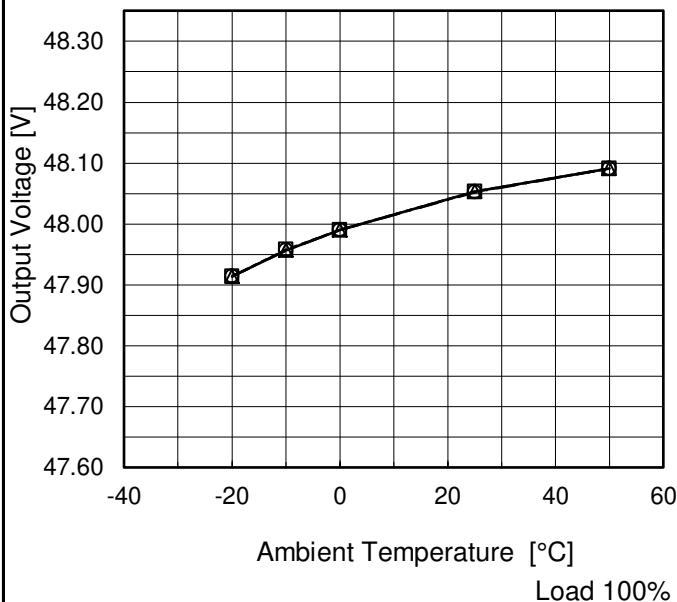

Testing Circuitry Figure A

2.Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]
-20	47.914	47.914	47.914
-10	47.957	47.958	47.957
0	47.990	47.990	47.990
25	48.053	48.053	48.053
50	48.091	48.090	48.091
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-



Model	WMA350H-48	Testing Circuitry Figure A
Item	Output Voltage Accuracy	
Object	+48V7.3A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10 - 50°C

Input Voltage : 200 - 264V

Load Current : 0 - 7.3A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

$$\text{* Output Voltage Accuracy (Ratio)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$


2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	50	230	0	48.097	±70	±0.1
Minimum Voltage	-10	200	7.3	47.957		

COSEL

Model	WMA350H-48
Item	Time Lapse Drift
Object	+48V7.3A

1.Graph

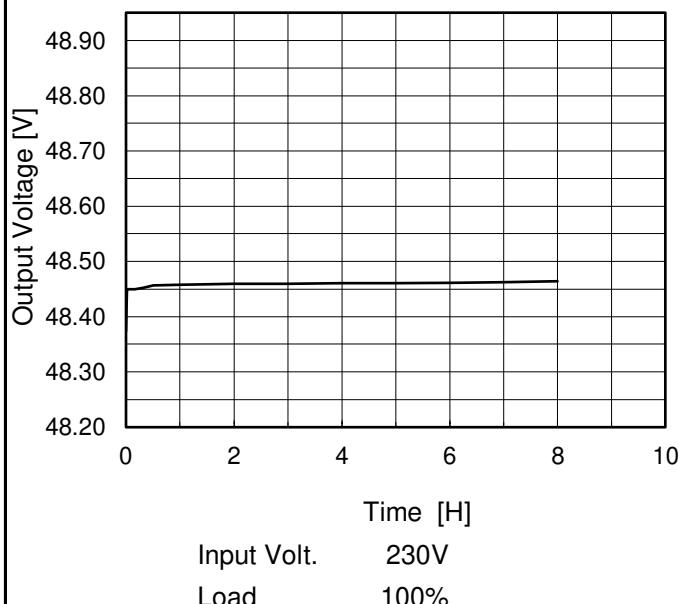
 Temperature 25°C
 Testing Circuitry Figure A

2.Values


Time since start [H]	Output Voltage [V]
0.0	48.374
0.5	48.457
1.0	48.458
2.0	48.460
3.0	48.460
4.0	48.461
5.0	48.461
6.0	48.462
7.0	48.463
8.0	48.464

COSEL

Model	WMA350H-48
Item	Rise and Fall Time
Object	+48V7.3A

Temperature
Testing Circuitry
25°C
Figure A


1. Graph

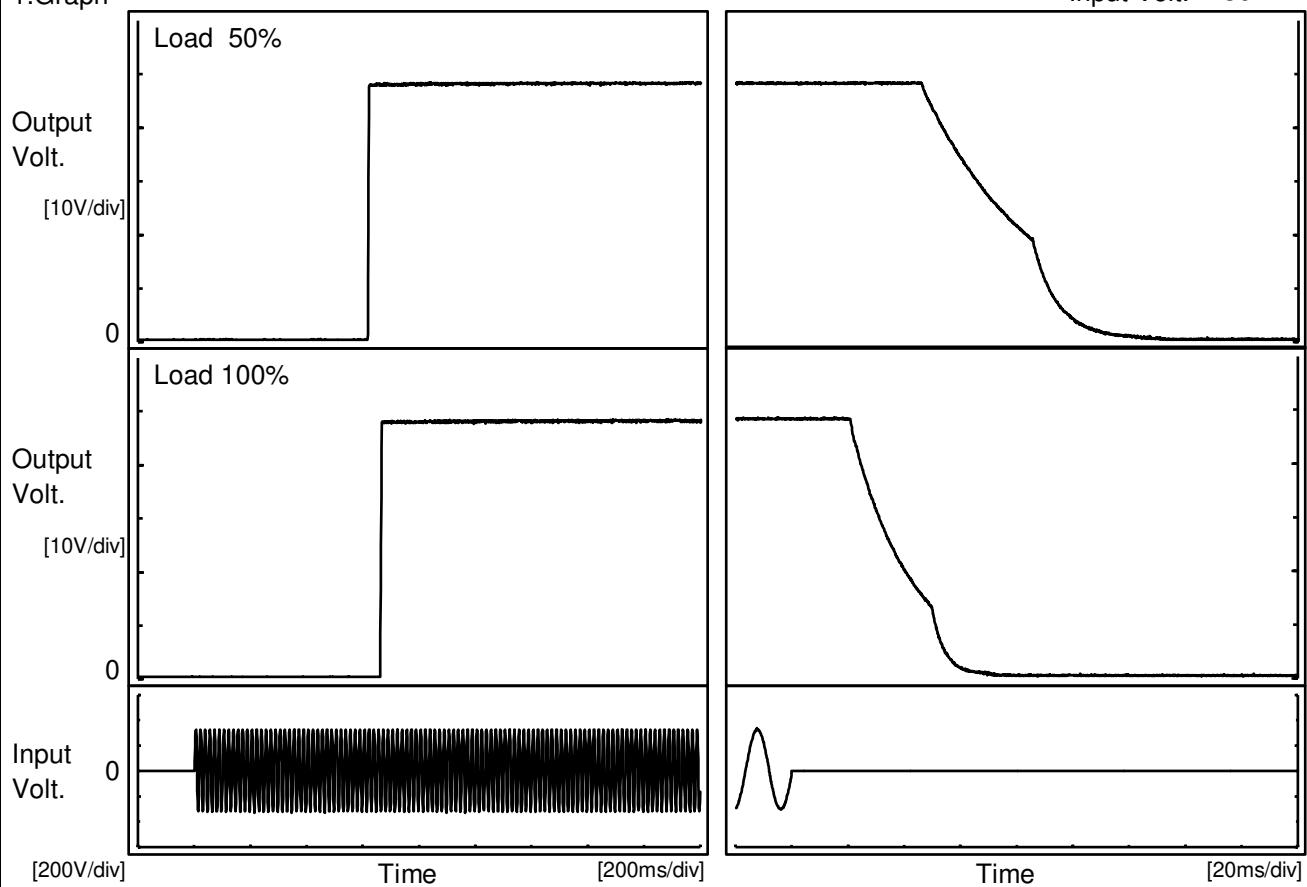

2. Values

[ms]

Load	Time	Td	Tr	Ts	Th	Tf
50 %		617.0	4.0	621.0	49.7	48.2
100 %		661.0	5.0	666.0	22.6	31.7

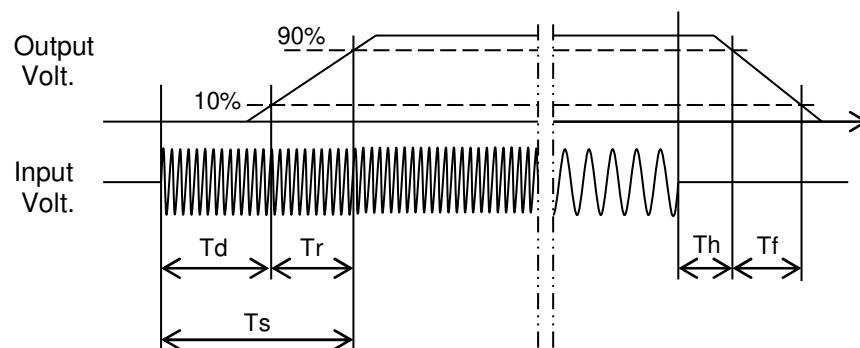




Model	WMA350H-48
Item	Hold-Up Time
Object	+48V7.3A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

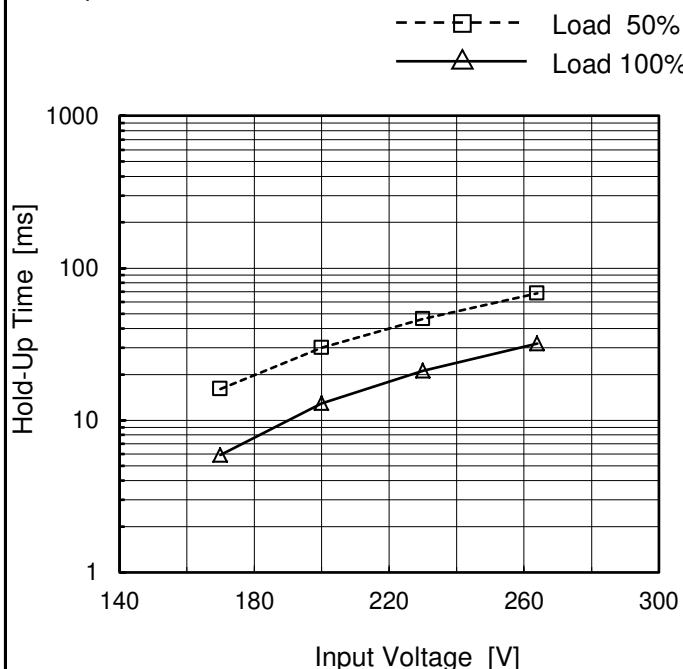


2. Values

Input Voltage [V]	Hold-Up Time [ms]	
	Load 50%	Load 100%
170	16	6
200	30	13
230	46	21
264	68	32
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

COSEL

Model	WMA350H-48
Item	Instantaneous Interruption Compensation
Object	+48V7.3A

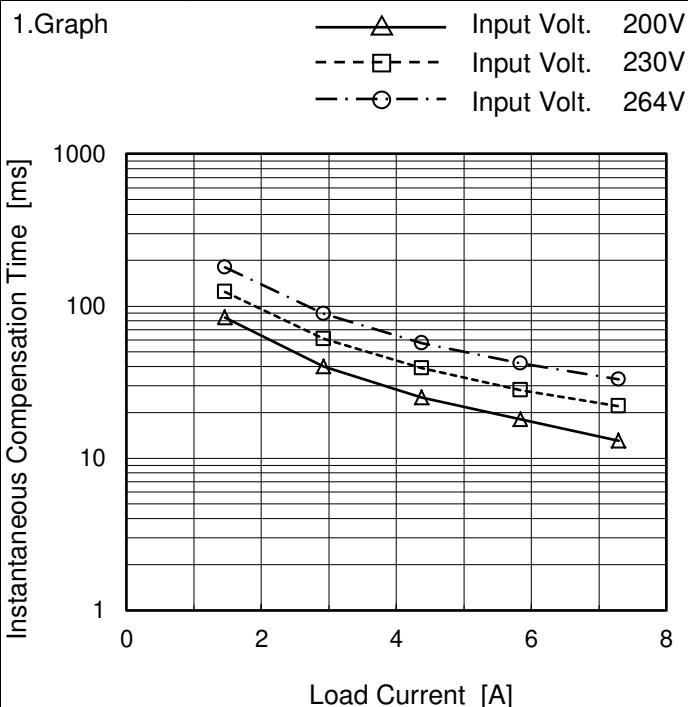 Temperature 25°C
 Testing Circuitry Figure A


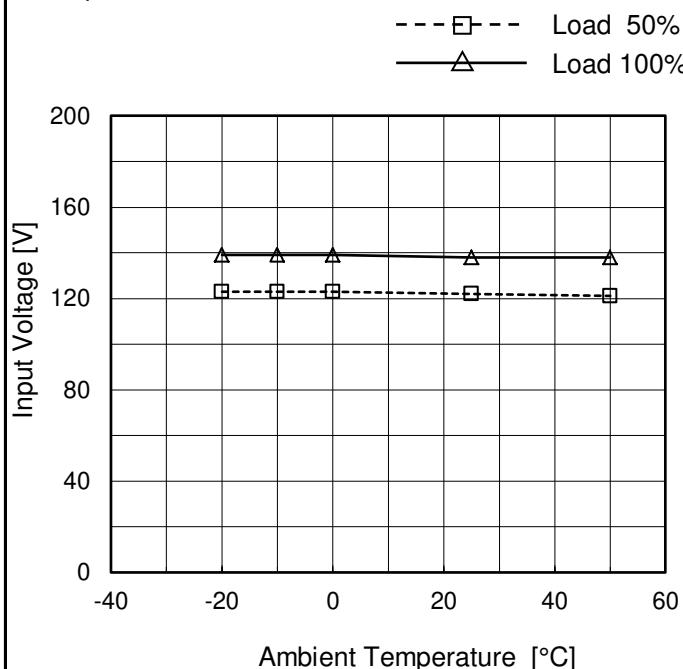
2. Values

Load Current [A]	Time [ms]		
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]
0.00	-	-	-
1.46	84	124	180
2.92	40	61	89
4.38	25	39	57
5.84	18	28	42
7.30	13	22	33
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-
--	-	-	-

COSEL

Model	WMA350H-48
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+48V7.3A

1. Graph



Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	123	139
-10	123	139
0	123	139
25	122	138
50	121	138
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-




Model	WMA350H-48																																																																									
Item	Overcurrent Protection	Temperature Testing Circuitry	25°C Figure A																																																																							
Object	+48V7.3A																																																																									
1.Graph	<p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																																																									
2.Values	<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 200[V]</th> <th>Input Volt. 230[V]</th> <th>Input Volt. 264[V]</th> </tr> </thead> <tbody> <tr> <td>48</td><td>8.81</td><td>8.95</td><td>9.14</td></tr> <tr> <td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>			Output Voltage [V]	Load Current [A]			Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]	48	8.81	8.95	9.14	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Output Voltage [V]	Load Current [A]																																																																									
	Input Volt. 200[V]	Input Volt. 230[V]	Input Volt. 264[V]																																																																							
48	8.81	8.95	9.14																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							
--	-	-	-																																																																							

COSEL

Model	WMA350H-48
Item	Oversupply Protection
Object	+48V7.3A

1. Graph

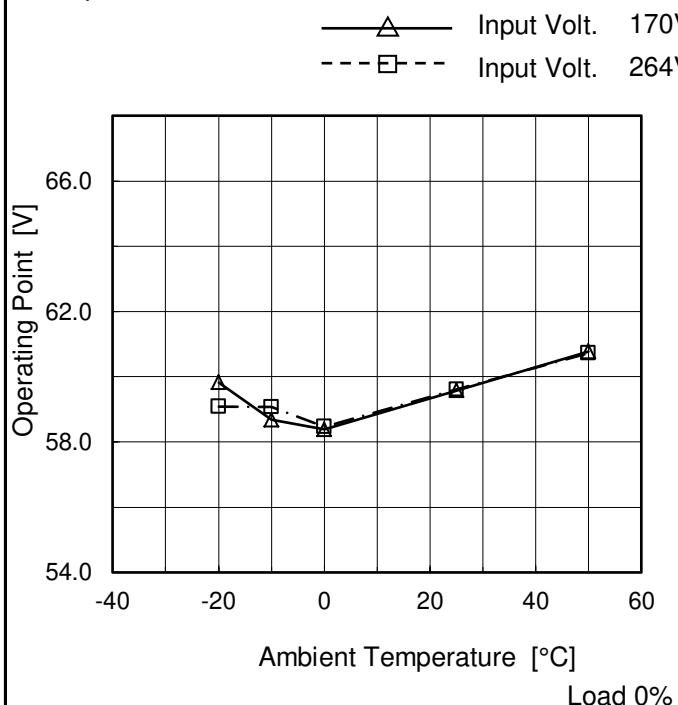

Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Operating Point [V]	
	Input Volt. 170[V]	Input Volt. 264[V]
-20	59.83	59.08
-10	58.67	59.07
0	58.38	58.47
25	59.58	59.61
50	60.78	60.72
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-
--	-	-

COSEL

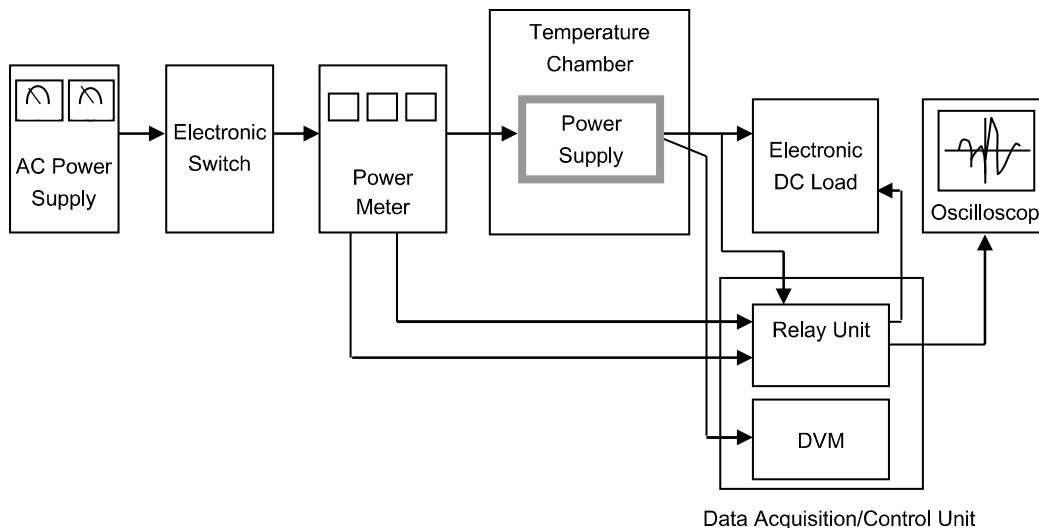


Figure A

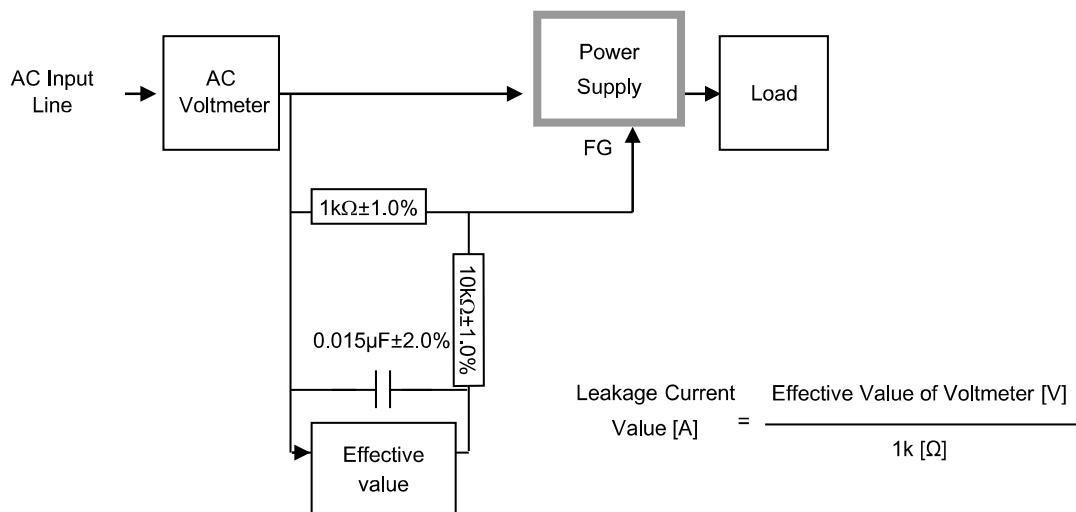


Figure B (IEC60601-1)

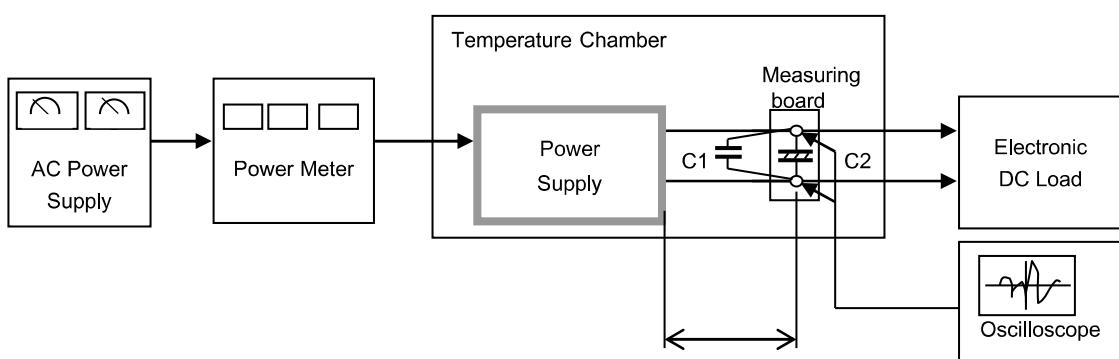


Figure C