

COSEL

TEST DATA OF ZUS101205
(12.0V INPUT)

Regulated DC Power Supply

Date : Sep 21. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : M. Takashima
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立ち上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSSEL


Model ZUS101205

Item Line Regulation 静的入力変動

Object +5V 2.000A

1. Graph

-----□----- Load 50%
 -----△----- Load 100%

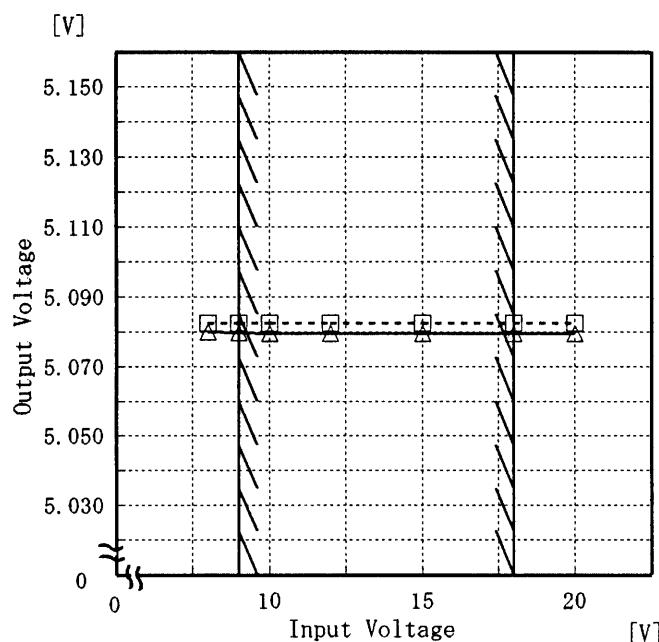

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

Temperature 25°C
 Testing Circuitry Figure A

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
8.0	5.082	5.080
9.0	5.082	5.080
10.0	5.082	5.079
12.0	5.082	5.080
15.0	5.082	5.080
18.0	5.082	5.079
20.0	5.082	5.080
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSEL


Model ZUS101205

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

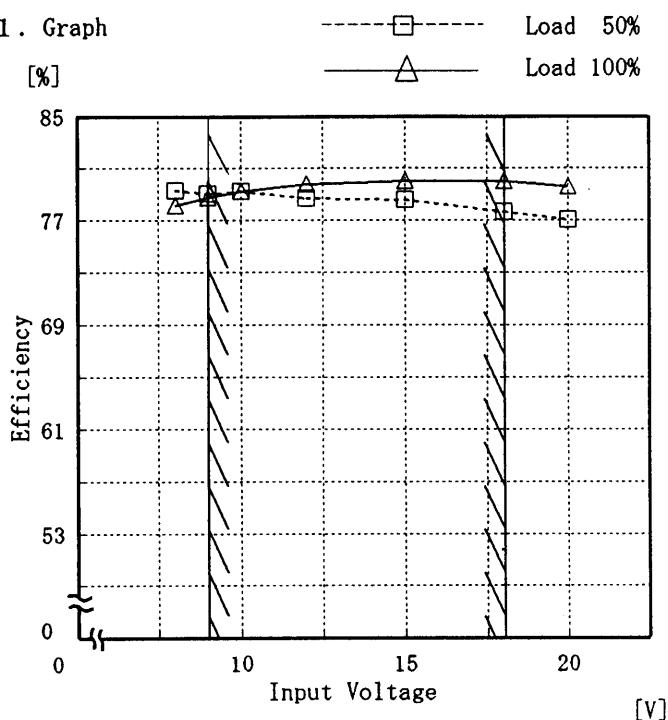

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
8.0	79.3	78.1
9.0	79.0	78.7
10.0	79.2	79.2
12.0	78.7	79.8
15.0	78.6	80.0
18.0	77.6	80.0
20.0	77.0	79.6
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

COSSEL

Model	ZUS101205
Item	Load Regulation 靜的負荷変動
Object	+5V 2.000 A
1. Graph	
<p style="text-align: center;"> △ Input Volt. 9.0V □ Input Volt. 12.0V ○ Input Volt. 18.0V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p>	
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>	

Temperature 25°C
 Testing Circuitry Figure A

2. Values

Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.00	5.085	5.085	5.084
0.40	5.084	5.083	5.083
0.80	5.083	5.082	5.082
1.20	5.082	5.081	5.081
1.60	5.081	5.081	5.080
2.00	5.080	5.080	5.080
2.20	5.080	5.079	5.079
—	—	—	—
—	—	—	—
—	—	—	—

COSEL

Model	ZUS101205	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)																																								
Object	+ 5 V 2 A																																								
1. Graph		2. Values																																							
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th>Input Volt. 9.0 [V]</th> <th>Input Volt. 18.0 [V]</th> </tr> <tr> <th>Ripple Output Volt. [mV]</th> <th>Ripple Output Volt. [mV]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>0.4</td><td>5</td><td>5</td></tr> <tr><td>0.8</td><td>9</td><td>9</td></tr> <tr><td>1.2</td><td>15</td><td>14</td></tr> <tr><td>1.6</td><td>21</td><td>20</td></tr> <tr><td>2.0</td><td>26</td><td>21</td></tr> <tr><td>2.2</td><td>30</td><td>25</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>		Load Current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.0	5	5	0.4	5	5	0.8	9	9	1.2	15	14	1.6	21	20	2.0	26	21	2.2	30	25	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]																																							
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																							
0.0	5	5																																							
0.4	5	5																																							
0.8	9	9																																							
1.2	15	14																																							
1.6	21	20																																							
2.0	26	21																																							
2.2	30	25																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
—	—	—																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p - p 値で示される。 (注)斜線は定格負荷電流範囲を示す。</p> <p>T1: Due to AC Input Line T2: Due to Switching</p>																																									
<p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>		<p>BC-2066</p>																																							

COSEL

Model	ZUS101205	Temperature Testing Circuitry	25°C Figure A																																						
Item	Ripple-Noise リップルノイズ																																								
Object	+5V 2.000A																																								
1. Graph	<p>-----□----- Input Volt. 9.0V [mV]</p> <p>-----△----- Input Volt. 18.0V</p>	2. Values																																							
		<table border="1"> <thead> <tr> <th rowspan="2">Load current [A]</th> <th>Input Volt. 9.0 [V]</th> <th>Input Volt. 18.0 [V]</th> </tr> <tr> <th>Ripple-Noise [mV]</th> <th>Ripple-Noise [mV]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>15</td><td>30</td></tr> <tr><td>0.40</td><td>30</td><td>35</td></tr> <tr><td>0.80</td><td>45</td><td>50</td></tr> <tr><td>1.20</td><td>55</td><td>65</td></tr> <tr><td>1.60</td><td>65</td><td>75</td></tr> <tr><td>2.00</td><td>70</td><td>75</td></tr> <tr><td>2.20</td><td>70</td><td>75</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]	Ripple-Noise [mV]	Ripple-Noise [mV]	0.00	15	30	0.40	30	35	0.80	45	50	1.20	55	65	1.60	65	75	2.00	70	75	2.20	70	75	-	-	-	-	-	-	-	-	-	-	-	-	
Load current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]																																							
	Ripple-Noise [mV]	Ripple-Noise [mV]																																							
0.00	15	30																																							
0.40	30	35																																							
0.80	45	50																																							
1.20	55	65																																							
1.60	65	75																																							
2.00	70	75																																							
2.20	70	75																																							
-	-	-																																							
-	-	-																																							
-	-	-																																							
-	-	-																																							

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

- T1: Due to AC Input Line
 入力商用周期
T2: Due to Switching
 スイッチング周期

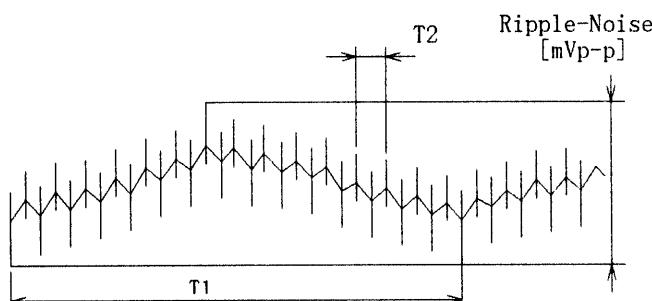


Fig. Complex Ripple Wave Form


図 リップル波形詳細図

COSEL

Model ZUS101205

Item Overcurrent Protection
過電流保護

Object +5V 2.000A

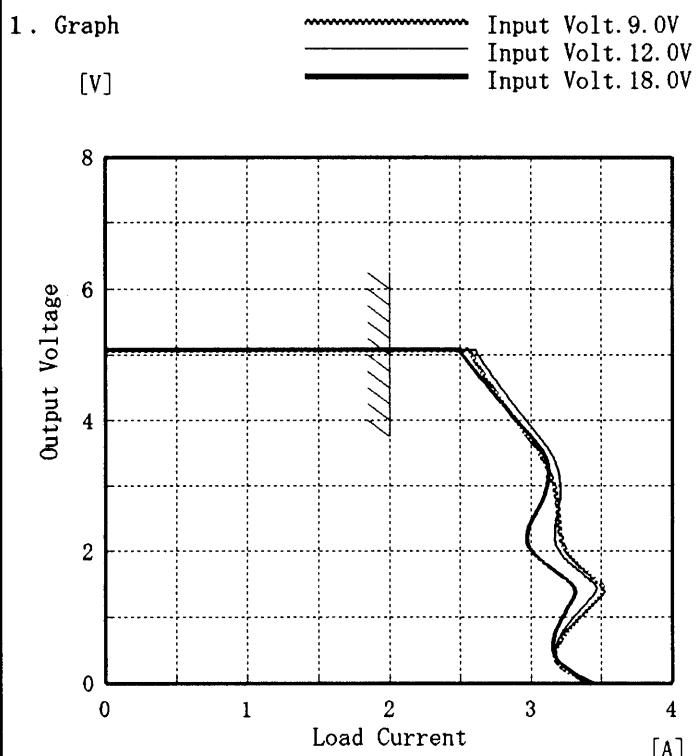Temperature 25°C
Testing Circuitry Figure A

2. Values

Output Voltage [V]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]
	Load Current [A]	Load Current [A]	Load Current [A]
5.00	2.58	2.63	2.52
4.75	2.65	2.71	2.62
4.50	2.72	2.78	2.70
4.00	2.89	2.96	2.90
3.50	3.06	3.14	3.09
3.00	3.16	3.21	3.12
2.50	3.19	3.18	3.02
2.00	3.25	3.20	3.01
1.50	3.49	3.45	3.29
1.00	3.36	3.31	3.23
0.50	3.18	3.17	3.16
0.00	3.48	3.52	3.53

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

COSEL

Model	ZUS101205	Temperature 25°C
Item	Dynamic Load Response 動的負荷變動	Testing Circuitry Figure A
Object	+5V 2.000A	


Input Volt. 5 V

Cycle 100 mS


Load Current

Min. Load ←→
Load 100 %


200 mV/div

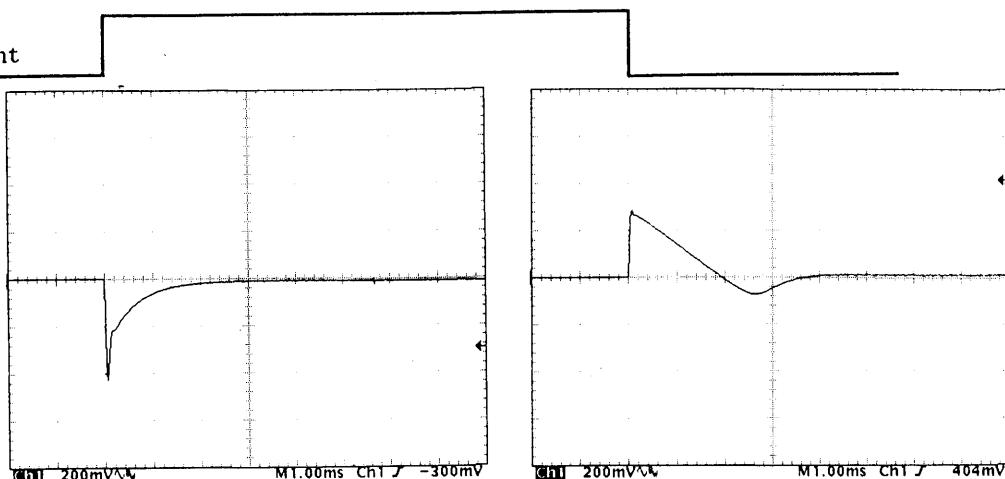Min. Load ←→
Load 50 %

200 mV/div

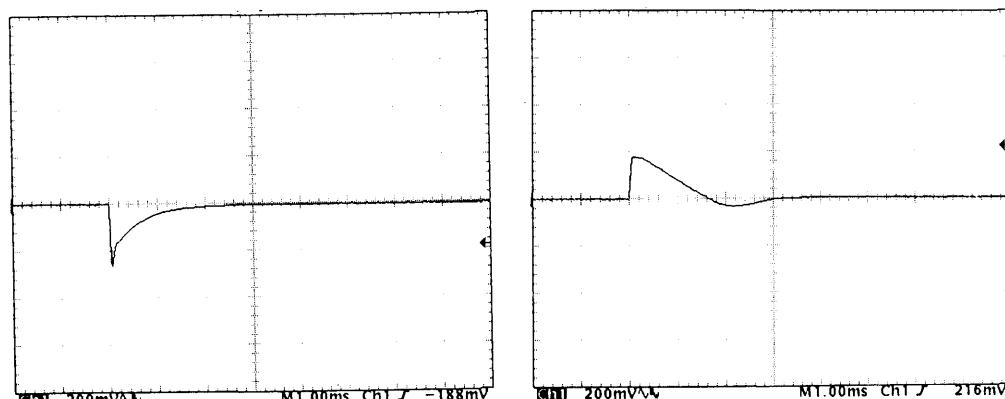Load 50%←→
Load 100 %

200 mV/div

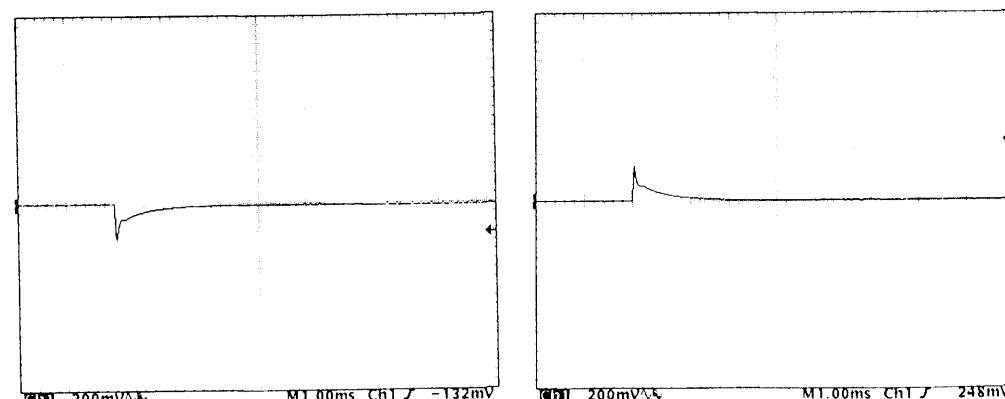

1 mS/div

COSEL


Model ZUS101205

Item Rise and Fall Time 立上り、立下り時間

Object +5V 2.000A

Temperature 25°C
Testing Circuitry Figure A


1. Graph

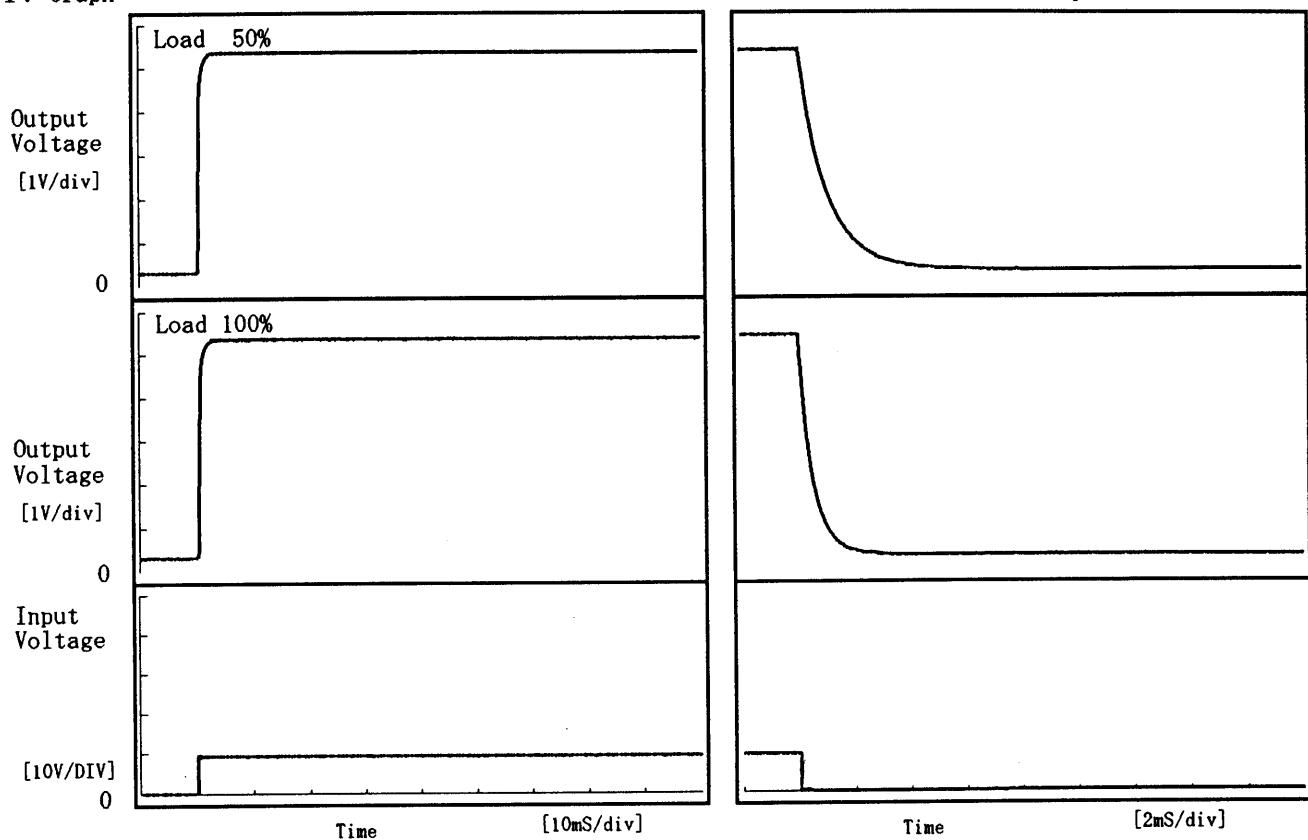

2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f
50 %		0.35	0.55	0.90	0.19	2.29
100 %		0.35	0.60	0.95	0.08	1.14

[mS]

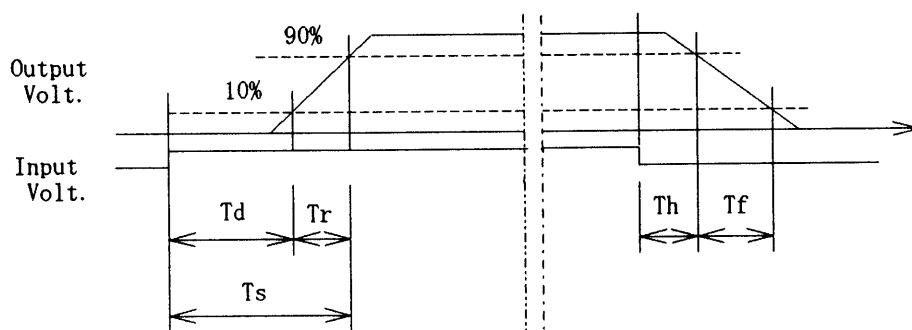

COSEL


Model ZUS101205

Item Ambient Temperature Drift
周囲温度変動

Object +5V 2.000A

1. Graph

△ Input Volt. 9.0V
 -□- Input Volt. 12.0V
 -○- Input Volt. 18.0V

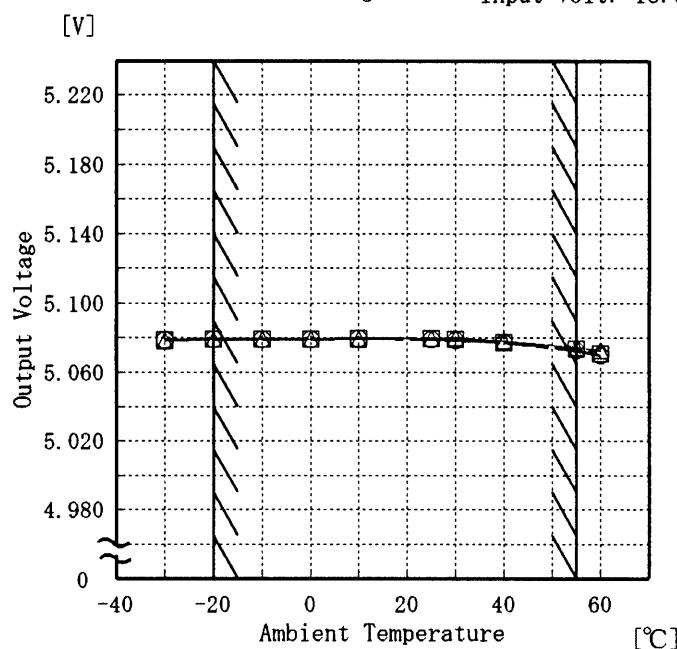

Load 100%

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Temperature [°C]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	5.079	5.079	5.079
-20	5.079	5.079	5.079
-10	5.079	5.079	5.079
0	5.079	5.079	5.079
10	5.079	5.080	5.080
25	5.080	5.079	5.079
30	5.080	5.079	5.079
40	5.078	5.078	5.077
55	5.075	5.074	5.073
60	5.073	5.071	5.070
—	—	—	—


COSEL

Model ZUS101205

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +5V 2.000A

1. Graph

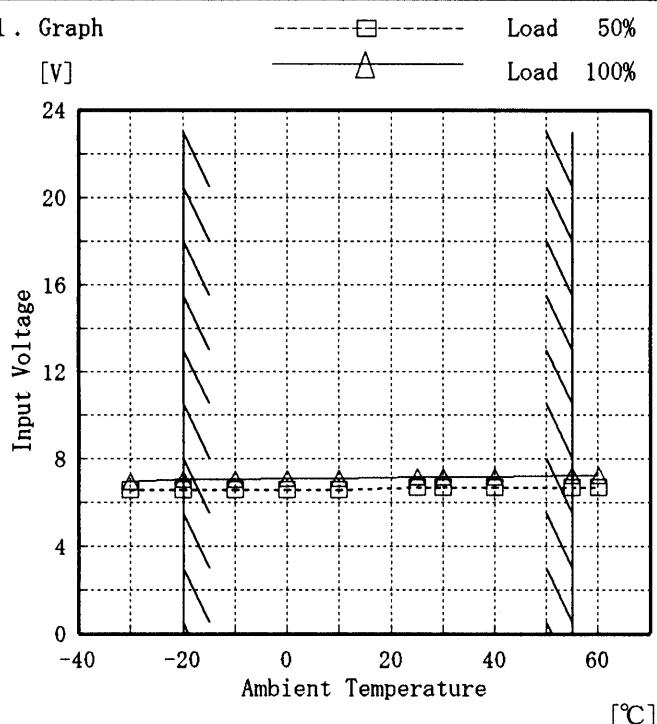

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	6.6	7.0
-20	6.6	7.1
-10	6.6	7.1
0	6.6	7.1
10	6.6	7.1
25	6.7	7.2
30	6.7	7.2
40	6.7	7.2
55	6.7	7.2
60	6.7	7.2
—	—	—

COSEL

Model	ZUS101205
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+ 5 V 2. 0 0 A
1. Graph	
<p style="text-align: center;">-----□----- Load 50% -----△----- Load 100%</p>	
<p style="text-align: center;">[mV]</p> <p style="text-align: center;">Ripple Voltage</p> <p style="text-align: center;">Ambient Temperature [°C]</p> <p style="text-align: center;">Input Volt. 9.0 V</p>	
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>	
<p>(注)斜線は定格周囲温度範囲を示す。</p>	

Testing Circuitry Figure A

2. Values


Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	15	25
-20	10	20
-10	10	20
0	10	15
10	10	15
25	10	15
30	10	15
40	10	15
55	10	20
60	10	20
—	—	—

COSEL

Model	ZUS101205
Item	Time Lapse Drift 経時ドリフト
Object	+5V 2.000A

Temperature 25 °C
 Testing Circuitry Figure A

1. Graph

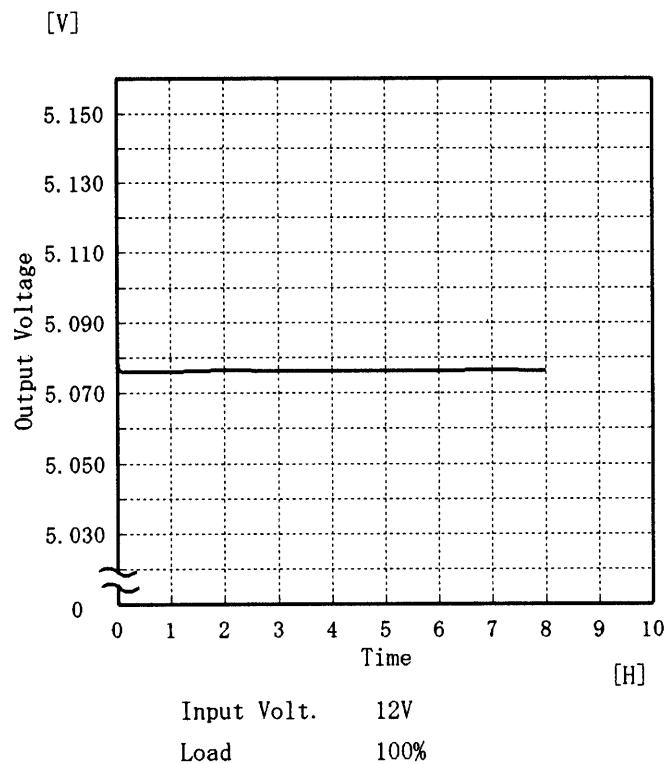

2. Values

Time since start [H]	Output Voltage [V]
0.0	5.079
0.5	5.076
1.0	5.076
2.0	5.077
3.0	5.076
4.0	5.076
5.0	5.076
6.0	5.076
7.0	5.077
8.0	5.076



Model	ZUS101205	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+5V 2.000 A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 9.0~18.0 V

Load Current : 0.000~2.000 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 9.0~18.0 V

負荷電流 0.000~2.000 A

* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	18.0	0.000	5.085		
Minimum Voltage	55	18.0	2.000	5.071	±7	±0.2



Model	ZUS101205		
Item	Condensation 結露特性	Testing Circuitry	Figure A
Object	+5V 2.000A		

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	5.078	10	40
	2	5.075	10	40
	3	5.076	10	40
Load 100 %	1	5.074	15	55
	2	5.071	15	55
	3	5.073	15	55

Input Volt. 12.0 V

