



TEST DATA OF ZUS1R54812

(48.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : K. Shimano
Design Engineer


コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

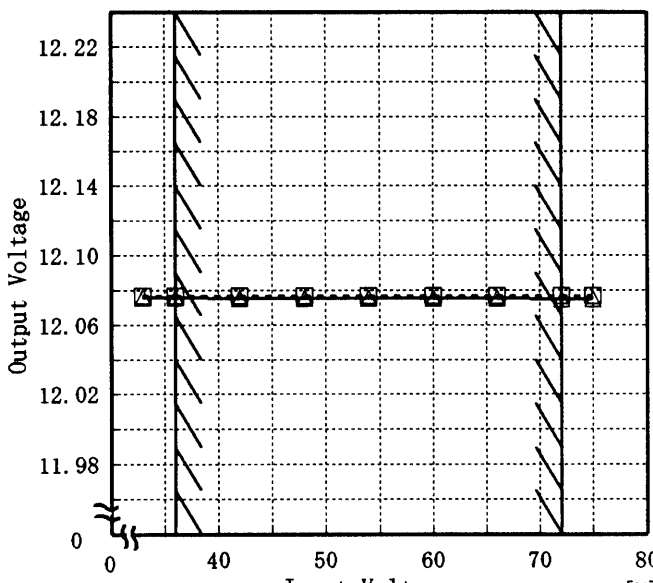Model		ZUS1R54812																																								
Item		Line Regulation 静的入力変動																																								
Object		+12V0.13A																																								
1. Graph		2. Values																																								
<div><div>-----□----- Load 50%</div><div>-----△----- Load 100%</div></div> <div><div>Output Voltage [V]</div><div></div><div><div>Note: Slanted line shows the range of the rated input voltage.</div><div>(注)斜線は定格入力電圧範囲を示す。</div></div></div>		<table><tr><th>Input Voltage [V]</th><th>Load 50% Output Volt. [V]</th><th>Load 100% Output Volt. [V]</th></tr><tr><td>33.0</td><td>12.077</td><td>12.076</td></tr><tr><td>36.0</td><td>12.077</td><td>12.076</td></tr><tr><td>42.0</td><td>12.077</td><td>12.075</td></tr><tr><td>48.0</td><td>12.077</td><td>12.075</td></tr><tr><td>54.0</td><td>12.077</td><td>12.075</td></tr><tr><td>60.0</td><td>12.077</td><td>12.075</td></tr><tr><td>66.0</td><td>12.077</td><td>12.075</td></tr><tr><td>72.0</td><td>12.077</td><td>12.075</td></tr><tr><td>75.0</td><td>12.076</td><td>12.075</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>		Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]	33.0	12.077	12.076	36.0	12.077	12.076	42.0	12.077	12.075	48.0	12.077	12.075	54.0	12.077	12.075	60.0	12.077	12.075	66.0	12.077	12.075	72.0	12.077	12.075	75.0	12.076	12.075	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50% Output Volt. [V]	Load 100% Output Volt. [V]																																								
33.0	12.077	12.076																																								
36.0	12.077	12.076																																								
42.0	12.077	12.075																																								
48.0	12.077	12.075																																								
54.0	12.077	12.075																																								
60.0	12.077	12.075																																								
66.0	12.077	12.075																																								
72.0	12.077	12.075																																								
75.0	12.076	12.075																																								
—	—	—																																								
—	—	—																																								
—	—	—																																								

COSEL


Model ZUS1R54812

Item Efficiency 効率

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

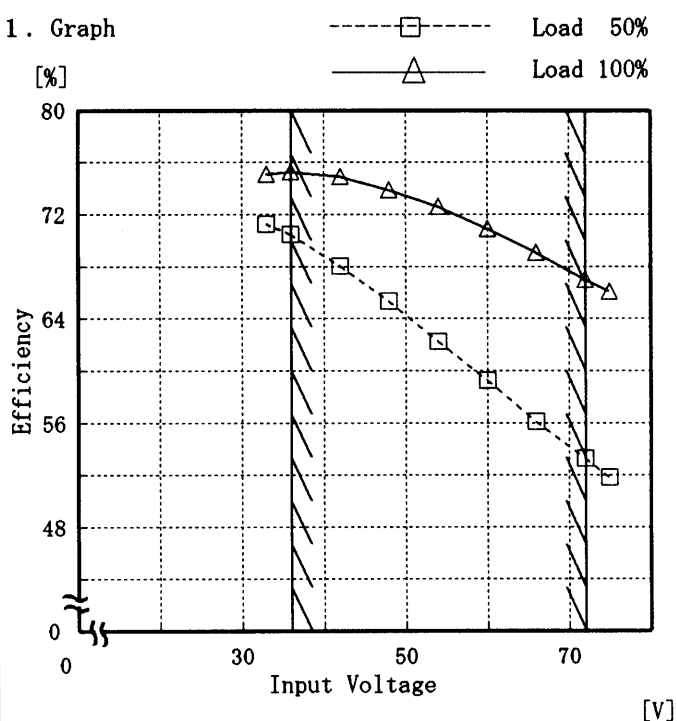

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	71.2	75.1
36.0	70.5	75.3
42.0	68.0	74.9
48.0	65.3	73.9
54.0	62.2	72.6
60.0	59.2	70.9
66.0	56.1	69.0
72.0	53.3	67.0
75.0	51.8	66.1
—	—	—
—	—	—
—	—	—

COSEL

Model ZUS1R54812


Item Load Regulation 静的負荷変動

Object +12V0.13A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

—△— Input Volt. 36.0V
 - - -□- - - Input Volt. 48.0V
 - - -○- - - Input Volt. 72.0V

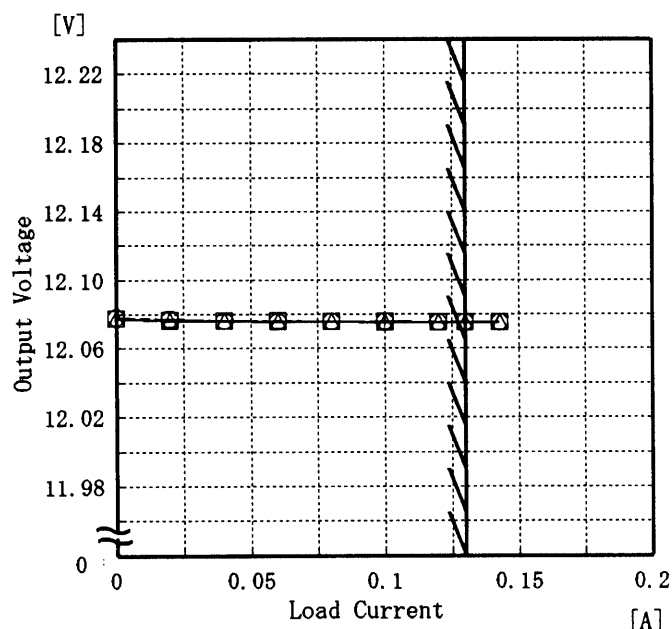

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
0.00	12.078	12.078	12.078
0.02	12.076	12.077	12.077
0.04	12.076	12.076	12.076
0.06	12.076	12.076	12.076
0.08	12.076	12.076	12.076
0.10	12.076	12.076	12.076
0.12	12.075	12.076	12.076
0.13	12.075	12.076	12.075
0.14	12.075	12.075	12.075
—	—	—	—

COSEL


Model ZUS1R54812

Item Ripple Voltage (by Load Current)
リップル電圧 (負荷電流特性)

Object +12V 0.13A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- Input Volt. 36.0V
 -----△----- Input Volt. 72.0V

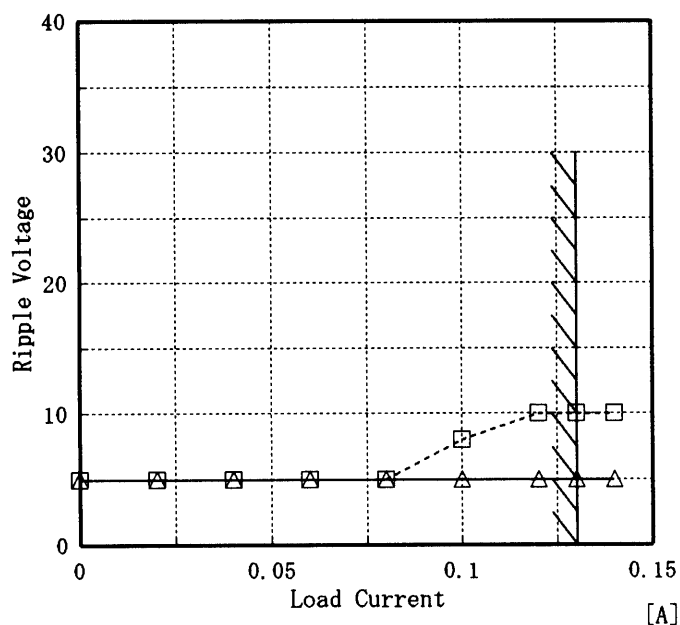

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

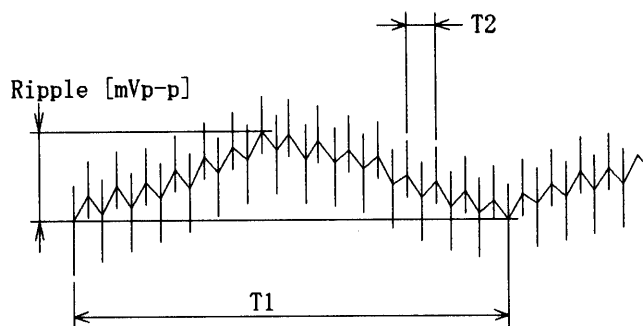



Fig. Complex Ripple Wave Form
図 リップル波形詳細図

2. Values

Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	5
0.02	5	5
0.04	5	5
0.06	5	5
0.08	5	5
0.10	8	5
0.12	10	5
0.13	10	5
0.14	10	5
—	—	—
—	—	—

BC-2013

COSEL

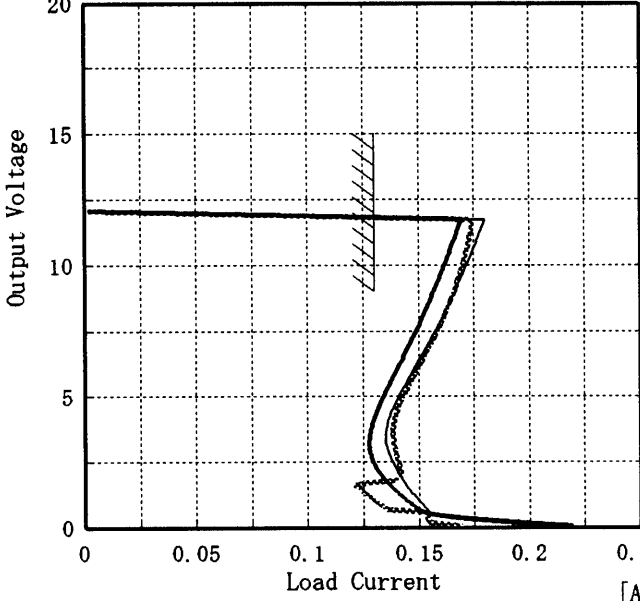COSEL																																																										
Model	ZUS1R54812	Temperature 25℃ Testing Circuitry Figure A																																																								
Item	Overcurrent Protection 過電流保護																																																									
Object	+12V0.13A																																																									
1. Graph		2. Values																																																								
[V]	<div><div>~~~~~</div>Input Volt. 36.0V</div> <div><div>———</div>Input Volt. 48.0V</div> <div><div>————</div>Input Volt. 72.0V</div>  <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																									
		<table><tr><th rowspan="2">Output Voltage [V]</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr><tr><th>Load Curr- ent [A]</th><th>Load Curr- ent [A]</th><th>Load Curr- ent [A]</th></tr><tr><td>12.00</td><td>0.17</td><td>0.18</td><td>0.17</td></tr><tr><td>11.40</td><td>0.17</td><td>0.18</td><td>0.17</td></tr><tr><td>10.80</td><td>0.17</td><td>0.18</td><td>0.17</td></tr><tr><td>9.60</td><td>0.17</td><td>0.17</td><td>0.16</td></tr><tr><td>8.40</td><td>0.16</td><td>0.16</td><td>0.15</td></tr><tr><td>7.20</td><td>0.16</td><td>0.16</td><td>0.15</td></tr><tr><td>6.00</td><td>0.15</td><td>0.15</td><td>0.14</td></tr><tr><td>4.80</td><td>0.14</td><td>0.14</td><td>0.13</td></tr><tr><td>3.60</td><td>0.14</td><td>0.13</td><td>0.13</td></tr><tr><td>2.40</td><td>0.14</td><td>0.14</td><td>0.13</td></tr><tr><td>1.20</td><td>0.13</td><td>0.15</td><td>0.14</td></tr><tr><td>0.00</td><td>0.17</td><td>0.21</td><td>0.22</td></tr></table>	Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	Load Curr- ent [A]	Load Curr- ent [A]	Load Curr- ent [A]	12.00	0.17	0.18	0.17	11.40	0.17	0.18	0.17	10.80	0.17	0.18	0.17	9.60	0.17	0.17	0.16	8.40	0.16	0.16	0.15	7.20	0.16	0.16	0.15	6.00	0.15	0.15	0.14	4.80	0.14	0.14	0.13	3.60	0.14	0.13	0.13	2.40	0.14	0.14	0.13	1.20	0.13	0.15	0.14	0.00	0.17	0.21	0.22	
Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]		Input Volt. 72.0[V]																																																						
	Load Curr- ent [A]	Load Curr- ent [A]	Load Curr- ent [A]																																																							
12.00	0.17	0.18	0.17																																																							
11.40	0.17	0.18	0.17																																																							
10.80	0.17	0.18	0.17																																																							
9.60	0.17	0.17	0.16																																																							
8.40	0.16	0.16	0.15																																																							
7.20	0.16	0.16	0.15																																																							
6.00	0.15	0.15	0.14																																																							
4.80	0.14	0.14	0.13																																																							
3.60	0.14	0.13	0.13																																																							
2.40	0.14	0.14	0.13																																																							
1.20	0.13	0.15	0.14																																																							
0.00	0.17	0.21	0.22																																																							

COSEL

Model	ZUS1R54812	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.13A		

Input Volt. 48.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



100 mV/div

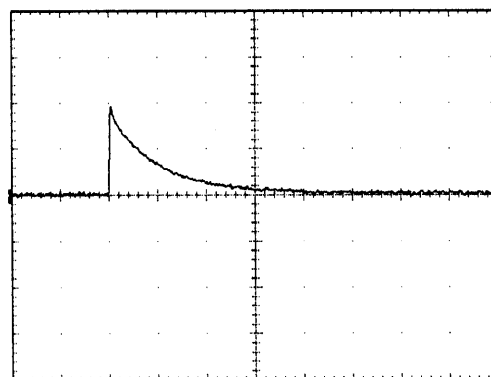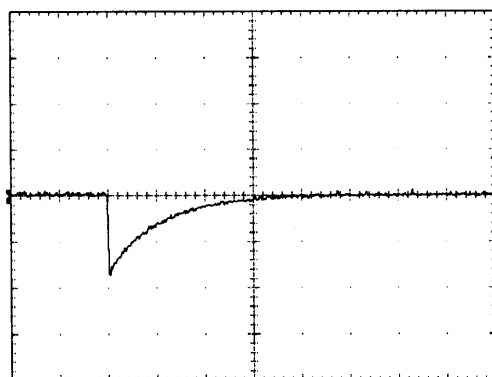

Min. Load ↔

Load 50 %



100 mV/div

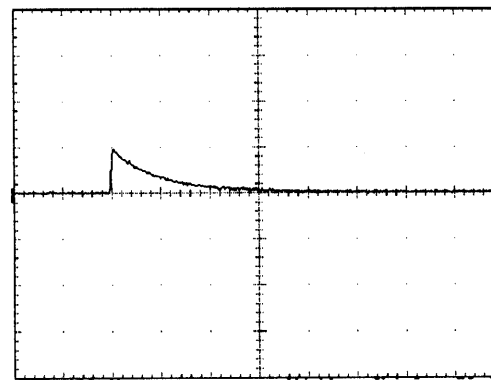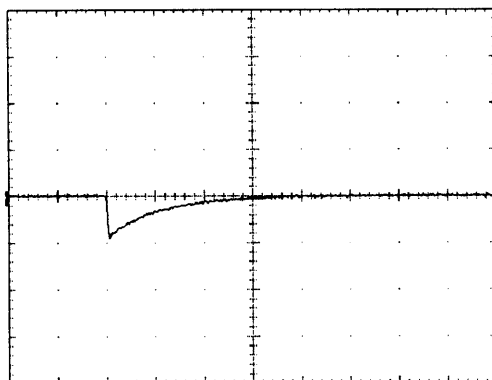

Load 50% ↔

Load 100 %

100 mV/div

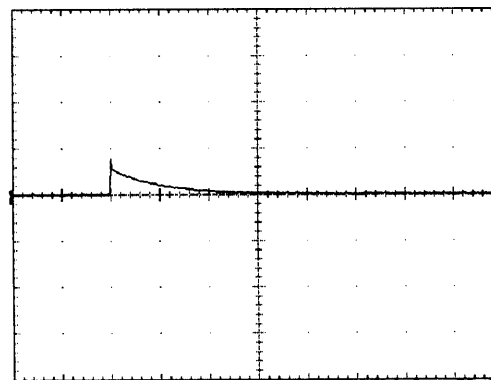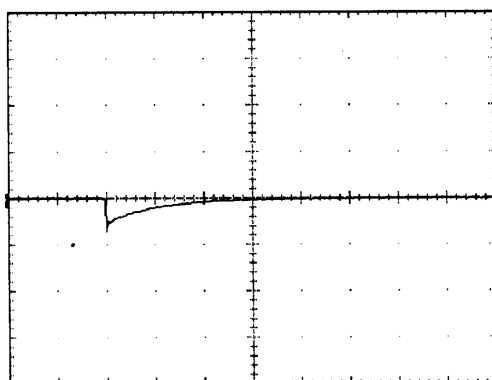


1 mS/div

COSEL

Model	ZUS1R54812	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.13A		

1. Graph


Input Volt. 36.0 V

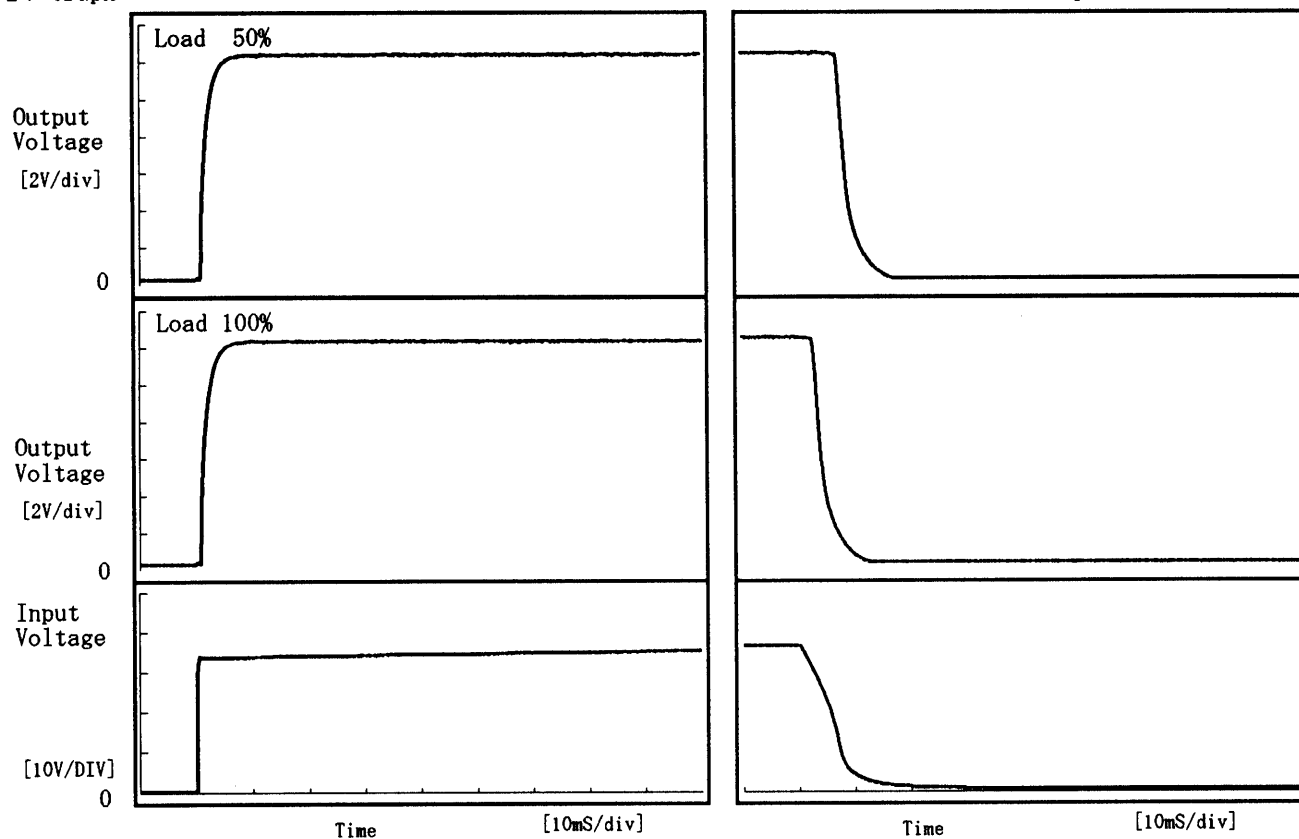

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.75	2.55	3.30	7.25	5.00
100 %	0.75	2.55	3.30	3.00	5.20

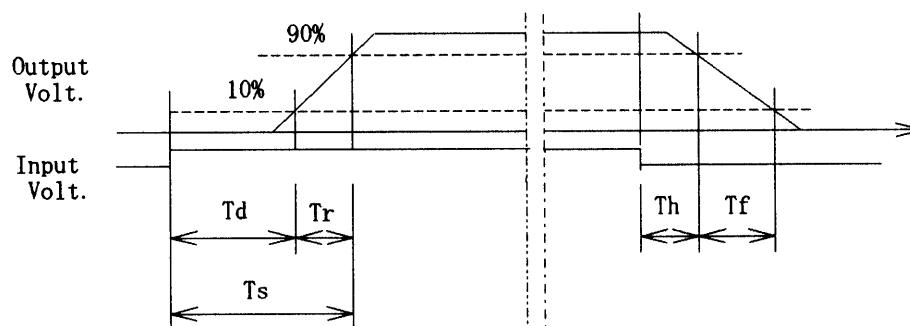

COSEL

Model		ZUS1R54812	
Item		Ambient Temperature Drift 周囲温度変動	
Object		+12V0.13A	

1. Graph

△

—

Input Volt. 36.0V

□

Input Volt. 48.0V

○

Input Volt. 72.0V

Output Voltage [V]

<

COSEL

Model ZUS1R54812


Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +12V0.13A

Testing Circuitry Figure A

1. Graph

[V]

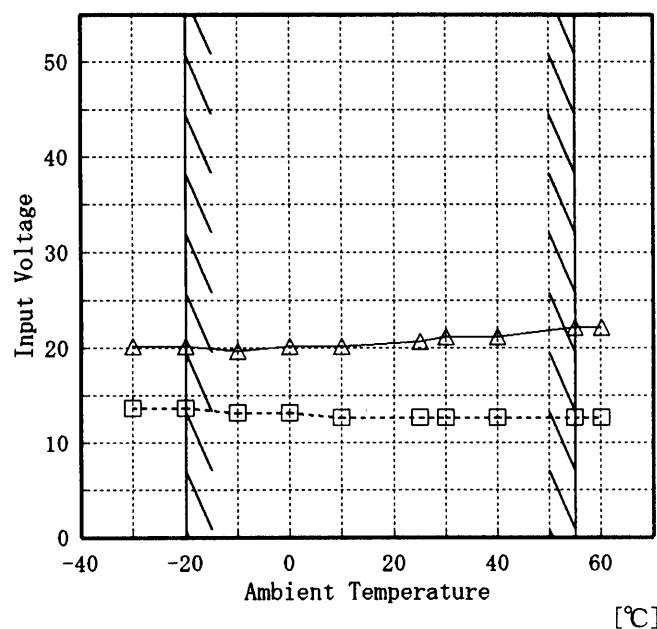

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	13.7	20.2
-20	13.7	20.2
-10	13.2	19.7
0	13.2	20.2
10	12.7	20.2
25	12.7	20.7
30	12.7	21.2
40	12.7	21.2
55	12.7	22.2
60	12.7	22.2
—	—	—

COSEL

Model		ZUS1R54812
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	
Object	+12V0.13A	

1. Graph

-----□----- Load 50%

-----△----- Load 100%

[mV]

40

30

20

10

0

Ripple Voltage

-40

-20

0

20

40

60

Ambient Temperature

[°C]

Input Volt. 36.0 V

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]
-30	5	15
-20	5	10
-10	5	10
0	5	10
10	5	10
25	5	10
30	5	10
40	5	10
55	5	10
60	5	10
—	—	—

COSEL

Model		ZUS1R54812	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+12V0.13A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 36.0~72.0 V

Load Current : 0.00~0.13 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 36.0~72.0 V

負荷電流 : 0.00~0.13 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	-20	72.0	0.00	12.079	±8	±0.1
Minimum Voltage	55	72.0	0.13	12.064		

COSEL

COLCEL

Model	ZUS1R54812
Item	Condensation 結露特性
Object	+12V 0.13A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 24℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温24℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	12.234	10	15
	2	12.240	10	15
	3	12.241	10	15
Load 100 %	1	12.233	10	15
	2	12.237	10	15
	3	12.238	10	15

Input Volt. 48.0 V

COSEL

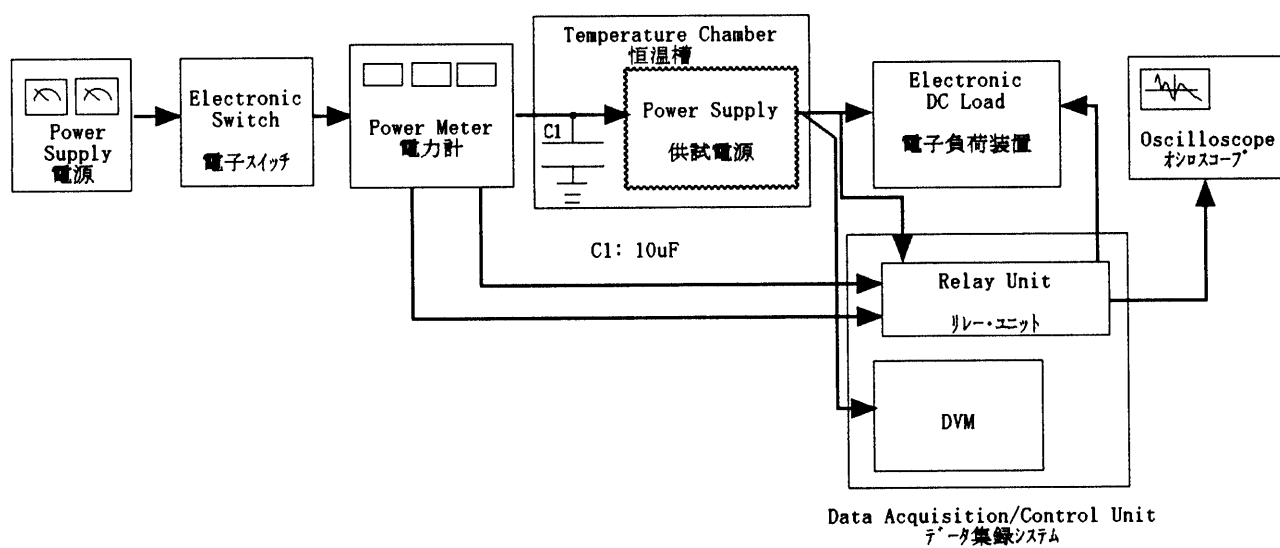


Figure A