



# TEST DATA OF ZUS30512 (5.0V INPUT)

Regulated DC Power Supply

Date : Nov. 5. 1996

Approved by : T. Sugimori  
Design Manager

Prepared by : ry. Nagai  
Design Engineer

コーセル株式会社  
COSEL CO., LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Efficiency . . . . .	2
効率	
3. Load Regulation . . . . .	3
静的負荷変動	
4. Ripple Voltage (by Load Current) . . . . .	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise . . . . .	5
リップルノイズ	
6. Overcurrent Protection . . . . .	6
過電流保護	
7. Dynamic Load Responce . . . . .	7
動的負荷変動	
8. Rise and Fall Time . . . . .	8
立上り、立下がり時間	
9. Ambient Temperature Drift . . . . .	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature) . . . . .	11
リップル電圧 (周囲温度特性)	
12. Time Lapse Drift . . . . .	12
経時ドリフト	
13. Output Voltage Accuracy . . . . .	13
定電圧精度	
14. Condensation . . . . .	14
結露特性	
15. Figure of Testing Circuitry . . . . .	15
測定回路図	

(Final Page 15 )

# COSEL

Model		ZUS30512	Temperature		25℃																																									
Item		Line Regulation  静的入力変動	Testing Circuitry		Figure A																																									
Object		+12V0.25A																																												
1. Graph			2. Values																																											
<div>-----□----- Load 50%</div> <div>-----△----- Load 100%</div> <div><p>[V]</p><p>Note: Slanted line shows the range of the rated input voltage.</p><p>(注)斜線は定格入力電圧範囲を示す。</p></div>			<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>4.0</td><td>12.054</td><td>12.051</td></tr><tr><td>4.5</td><td>12.054</td><td>12.051</td></tr><tr><td>5.0</td><td>12.054</td><td>12.051</td></tr><tr><td>6.0</td><td>12.054</td><td>12.052</td></tr><tr><td>7.0</td><td>12.054</td><td>12.052</td></tr><tr><td>8.0</td><td>12.054</td><td>12.052</td></tr><tr><td>9.0</td><td>12.054</td><td>12.051</td></tr><tr><td>9.5</td><td>12.054</td><td>12.051</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	4.0	12.054	12.051	4.5	12.054	12.051	5.0	12.054	12.051	6.0	12.054	12.052	7.0	12.054	12.052	8.0	12.054	12.052	9.0	12.054	12.051	9.5	12.054	12.051	—	—	—	—	—	—	—	—	—	—	—	—
Input Voltage [V]	Load 50%	Load 100%																																												
	Output Volt. [V]	Output Volt. [V]																																												
4.0	12.054	12.051																																												
4.5	12.054	12.051																																												
5.0	12.054	12.051																																												
6.0	12.054	12.052																																												
7.0	12.054	12.052																																												
8.0	12.054	12.052																																												
9.0	12.054	12.051																																												
9.5	12.054	12.051																																												
—	—	—																																												
—	—	—																																												
—	—	—																																												
—	—	—																																												

**COSEL**

Model		ZUS30512	
Item		Efficiency 効率	
Object			

1. Graph

-----□----- Load 50%

-----△----- Load 100%

Efficiency [%]

80

72

64

56

48

0

0

5

7

9

11

Input Voltage [V]

0

5

7

9

11

0

5

7

9

11

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。


2. Values

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
4.0	67.6	69.4
4.5	67.0	70.5
5.0	65.9	70.8
6.0	63.8	70.5
7.0	61.2	69.6
8.0	58.5	68.0
9.0	55.7	66.5
9.5	54.5	65.7
—	—	—
—	—	—
—	—	—
—	—	—

**COSEL**

Model		ZUS30512		Temperature 25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry Figure A																																																
Object		+12V0.25A																																																		
1. Graph		<div><div><div>—△—</div><div>- - -□- - -</div><div>- - -○- - -</div></div><div><div>Input Volt. 4.5V</div><div>Input Volt. 5.0V</div><div>Input Volt. 9.0V</div></div></div> <div><div>Output Voltage [V]</div><div><div>Load Current [A]</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current.</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>		2. Values																																																
		<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>12.056</td><td>12.056</td><td>12.057</td></tr><tr><td>0.04</td><td>12.056</td><td>12.055</td><td>12.055</td></tr><tr><td>0.08</td><td>12.055</td><td>12.055</td><td>12.055</td></tr><tr><td>0.12</td><td>12.054</td><td>12.054</td><td>12.054</td></tr><tr><td>0.16</td><td>12.053</td><td>12.053</td><td>12.053</td></tr><tr><td>0.20</td><td>12.053</td><td>12.053</td><td>12.052</td></tr><tr><td>0.24</td><td>12.052</td><td>12.052</td><td>12.052</td></tr><tr><td>0.25</td><td>12.052</td><td>12.052</td><td>12.052</td></tr><tr><td>0.28</td><td>12.052</td><td>12.052</td><td>12.051</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	12.056	12.056	12.057	0.04	12.056	12.055	12.055	0.08	12.055	12.055	12.055	0.12	12.054	12.054	12.054	0.16	12.053	12.053	12.053	0.20	12.053	12.053	12.052	0.24	12.052	12.052	12.052	0.25	12.052	12.052	12.052	0.28	12.052	12.052	12.051	—	—	—	—
Load Current [A]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																	
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																	
0.00	12.056	12.056	12.057																																																	
0.04	12.056	12.055	12.055																																																	
0.08	12.055	12.055	12.055																																																	
0.12	12.054	12.054	12.054																																																	
0.16	12.053	12.053	12.053																																																	
0.20	12.053	12.053	12.052																																																	
0.24	12.052	12.052	12.052																																																	
0.25	12.052	12.052	12.052																																																	
0.28	12.052	12.052	12.051																																																	
—	—	—	—																																																	

# COSEL

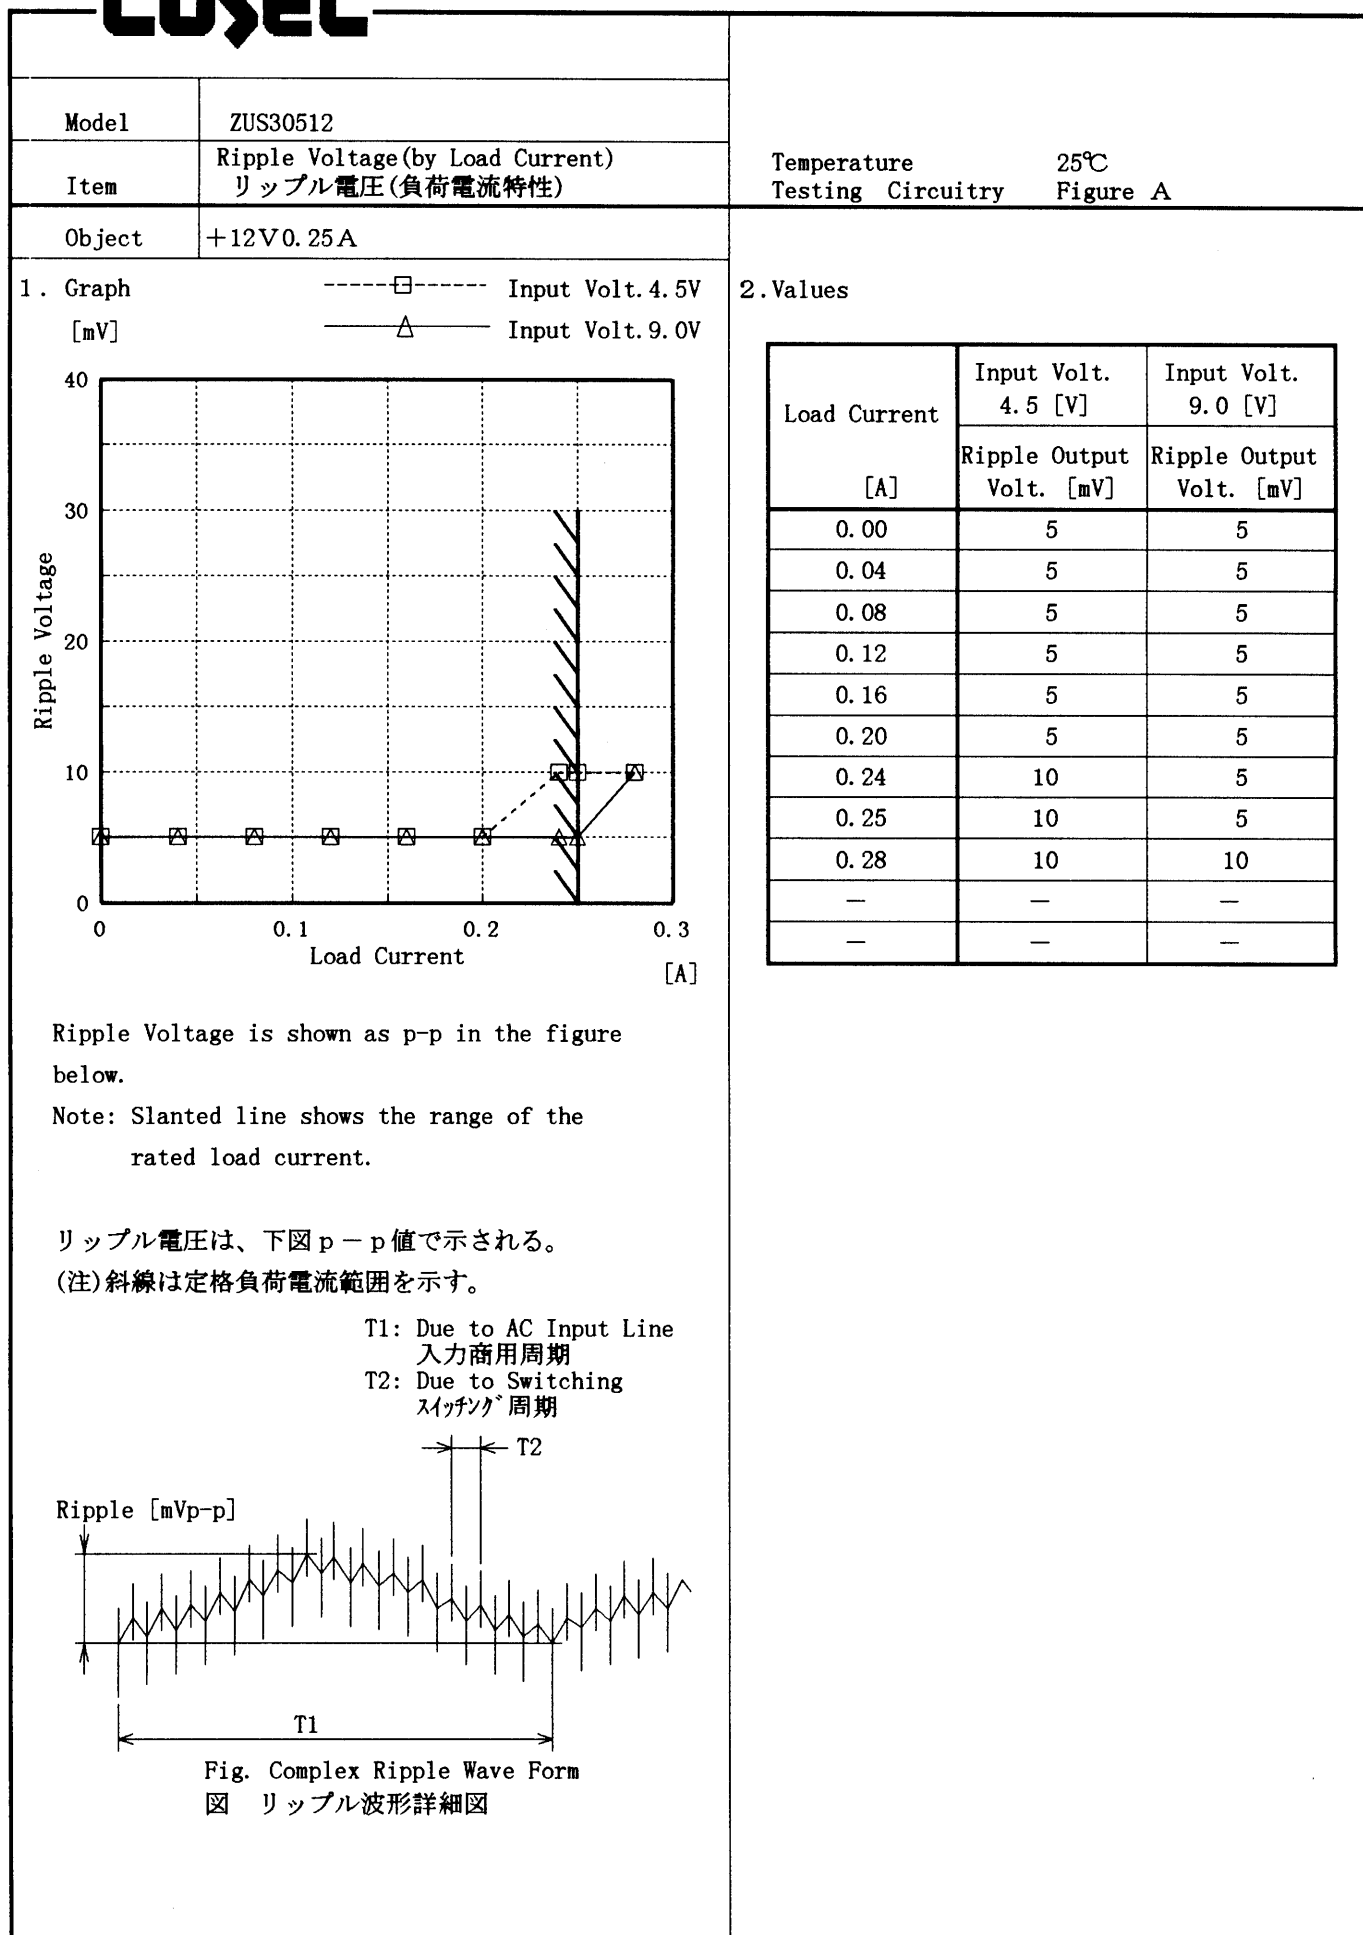

# COSEL

Model		ZUS30512	
Item		Ripple-Noise   リップルノイズ	
Object		+12V0.25A	

1. Graph

-----□-----    Input Volt. 4.5V

———△———    Input Volt. 9.0V

Ripple Voltage

[mV]

80

60

40

20

0

0

0.1

0.2

0.3

Load Current

[A]

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期

Ripple-Noise  
[mVp-p]

T1

T2

Fig. Complex Ripple Wave Form

図   リップル波形詳細図

Load Current	Input Volt.	Input Volt.
	4.5 [V]	9.0 [V]
[A]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	5
0.04	5	5
0.08	5	5
0.12	10	5
0.16	10	5
0.20	10	10
0.24	15	10
0.25	15	10
0.28	20	10
—	—	—
—	—	—

**COSEL**

<div>ModelZUS30512</div> <div>ItemOvercurrent Protection 過電流保護</div> <div>Object+12V0.25A</div>		<div>Temperature25℃</div> <div>Testing CircuitryFigure A</div>																																																							
<div>1. Graph</div> <div><div><div>[V]</div><div><div>Output Voltage [V]</div><div>Load Current [A]</div></div><div><div>~~~~~ Input Volt. 4.5V</div><div>———— Input Volt. 5.0V</div><div>———— Input Volt. 9.0V</div></div></div></div>		<div>2. Values</div> <table><tr><th rowspan="2">Output Voltage [V]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Load Current [A]</th><th>Load Current [A]</th><th>Load Current [A]</th></tr><tr><td>12.00</td><td>0.35</td><td>0.37</td><td>0.36</td></tr><tr><td>11.40</td><td>0.35</td><td>0.37</td><td>0.36</td></tr><tr><td>10.80</td><td>0.35</td><td>0.37</td><td>0.36</td></tr><tr><td>9.60</td><td>0.35</td><td>0.37</td><td>0.34</td></tr><tr><td>8.40</td><td>0.35</td><td>0.37</td><td>0.33</td></tr><tr><td>7.20</td><td>0.35</td><td>0.36</td><td>0.31</td></tr><tr><td>6.00</td><td>0.35</td><td>0.35</td><td>0.29</td></tr><tr><td>4.80</td><td>0.33</td><td>0.34</td><td>0.26</td></tr><tr><td>3.60</td><td>0.31</td><td>0.31</td><td>0.22</td></tr><tr><td>2.40</td><td>0.29</td><td>0.28</td><td>0.18</td></tr><tr><td>1.20</td><td>0.25</td><td>0.24</td><td>0.15</td></tr><tr><td>0.00</td><td>0.14</td><td>0.19</td><td>0.15</td></tr></table>	Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Load Current [A]	Load Current [A]	Load Current [A]	12.00	0.35	0.37	0.36	11.40	0.35	0.37	0.36	10.80	0.35	0.37	0.36	9.60	0.35	0.37	0.34	8.40	0.35	0.37	0.33	7.20	0.35	0.36	0.31	6.00	0.35	0.35	0.29	4.80	0.33	0.34	0.26	3.60	0.31	0.31	0.22	2.40	0.29	0.28	0.18	1.20	0.25	0.24	0.15	0.00	0.14	0.19	0.15
Output Voltage [V]	Input Volt. 4.5[V]	Input Volt. 5.0[V]		Input Volt. 9.0[V]																																																					
	Load Current [A]	Load Current [A]	Load Current [A]																																																						
12.00	0.35	0.37	0.36																																																						
11.40	0.35	0.37	0.36																																																						
10.80	0.35	0.37	0.36																																																						
9.60	0.35	0.37	0.34																																																						
8.40	0.35	0.37	0.33																																																						
7.20	0.35	0.36	0.31																																																						
6.00	0.35	0.35	0.29																																																						
4.80	0.33	0.34	0.26																																																						
3.60	0.31	0.31	0.22																																																						
2.40	0.29	0.28	0.18																																																						
1.20	0.25	0.24	0.15																																																						
0.00	0.14	0.19	0.15																																																						
<div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>																																																									



# COSEL

Model	ZUS30512	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.25A		

Input Volt. 5.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


200 mV/div

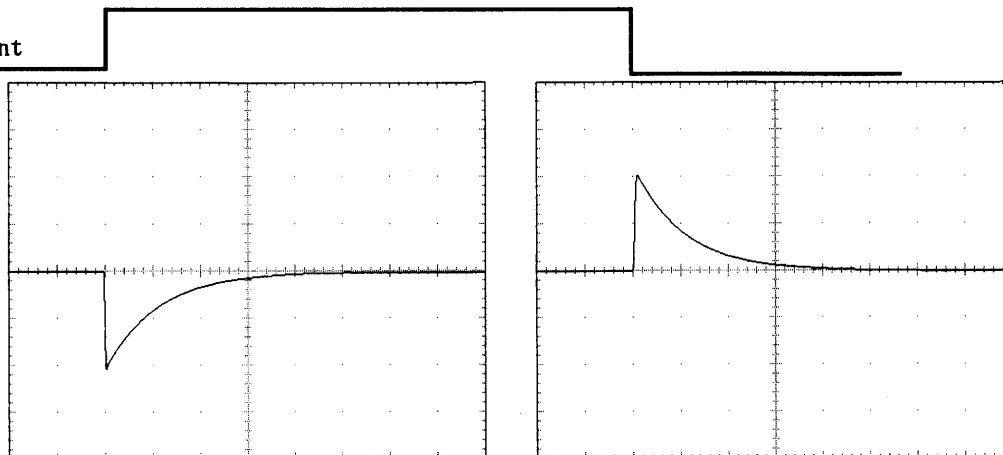

Min. Load ↔

Load 50 %


200 mV/div

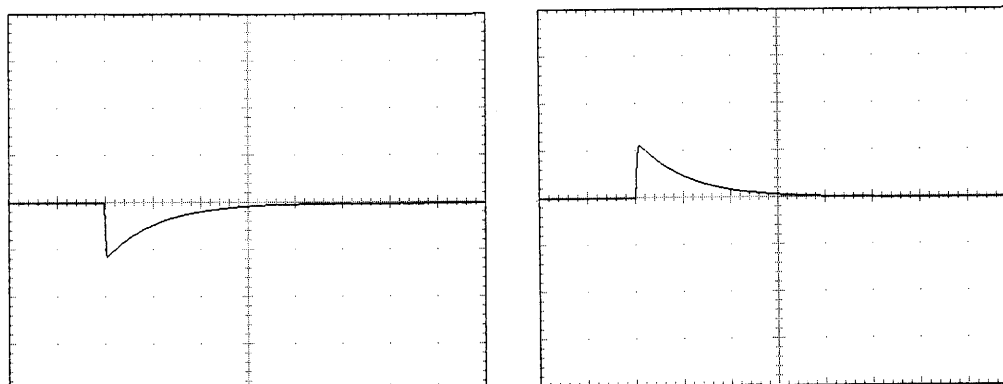

Load 50% ↔

Load 100 %

200 mV/div

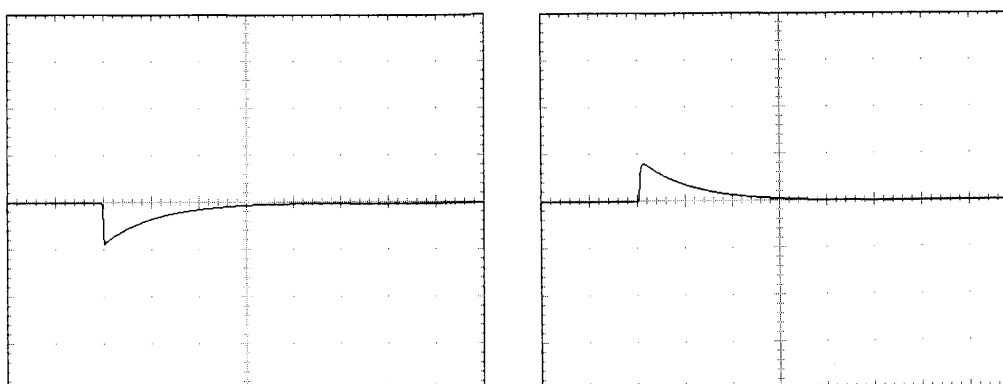


1 mS/div

**COSEL**

Model	ZUS30512	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.25A		

## 1. Graph


Input Volt. 4.5 V

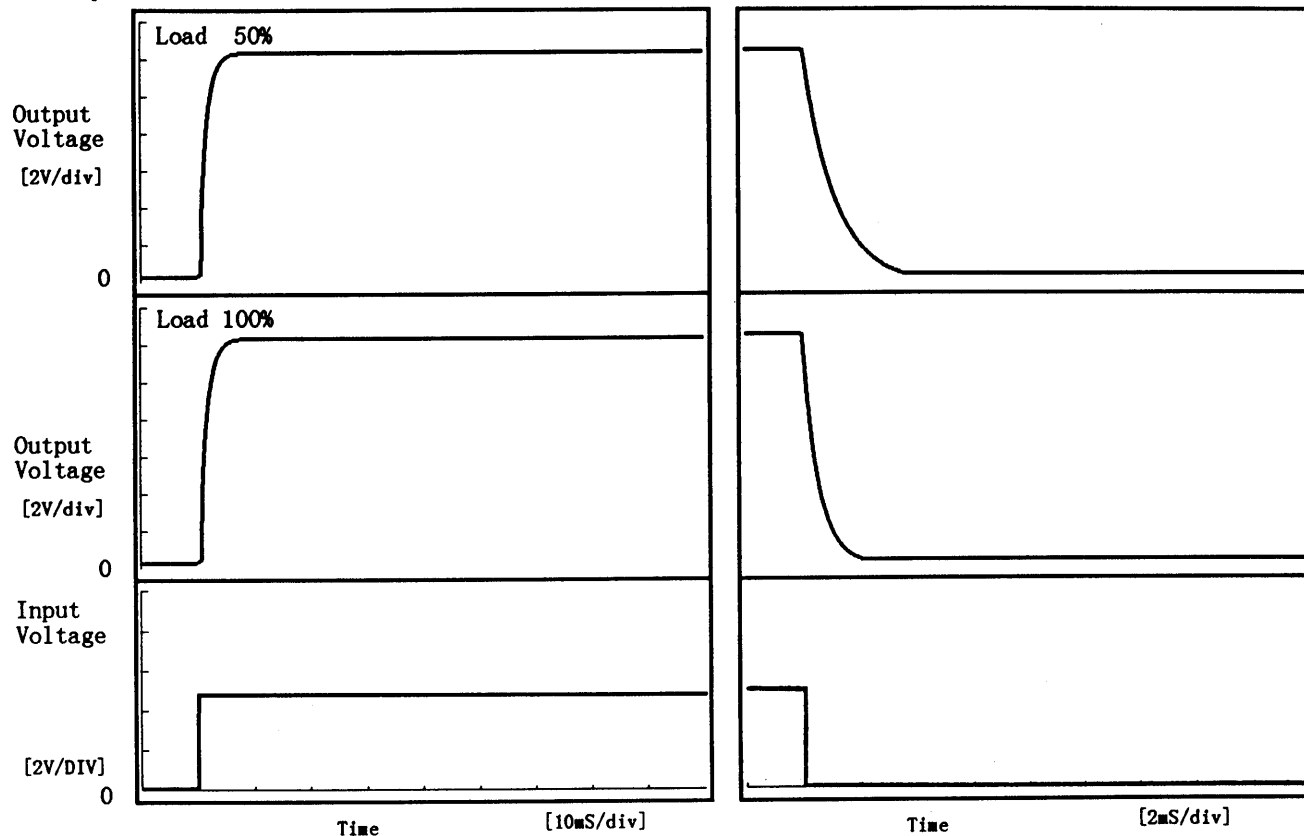

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.60	2.55	3.15	0.17	2.18
100 %	0.65	2.60	3.25	0.09	1.16

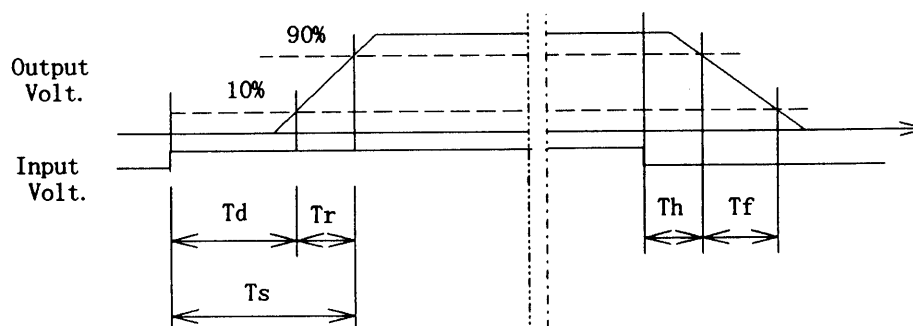

**COSEL**

Model		ZUS30512		Testing Circuitry    Figure A																																																			
Item		Ambient Temperature Drift 周囲温度変動																																																					
Object		+12V0.25A																																																					
1. Graph		2. Values																																																					
<div><div><div>—△—</div><div>---□---</div><div>---○---</div></div><div><div>Input Volt. 4.5V</div><div>Input Volt. 5.0V</div><div>Input Volt. 9.0V</div></div></div> <div><div><div>[V]</div><div>Ambient Temperature [°C]</div><div>Load    100%</div></div><div>Note: Slanted line shows the range of the rated ambient temperature.</div><div>(注)斜線は定格周囲温度範囲を示す。</div></div>		<table><tr><th rowspan="2">Temperature [°C]</th><th>Input Volt. 4.5[V]</th><th>Input Volt. 5.0[V]</th><th>Input Volt. 9.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>-30</td><td>12.033</td><td>12.033</td><td>12.034</td></tr><tr><td>-20</td><td>12.036</td><td>12.037</td><td>12.038</td></tr><tr><td>-10</td><td>12.040</td><td>12.041</td><td>12.041</td></tr><tr><td>0</td><td>12.043</td><td>12.044</td><td>12.045</td></tr><tr><td>10</td><td>12.046</td><td>12.047</td><td>12.048</td></tr><tr><td>25</td><td>12.050</td><td>12.051</td><td>12.051</td></tr><tr><td>30</td><td>12.052</td><td>12.052</td><td>12.051</td></tr><tr><td>40</td><td>12.050</td><td>12.050</td><td>12.050</td></tr><tr><td>55</td><td>12.045</td><td>12.044</td><td>12.043</td></tr><tr><td>60</td><td>12.040</td><td>12.039</td><td>12.039</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>			Temperature [°C]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	-30	12.033	12.033	12.034	-20	12.036	12.037	12.038	-10	12.040	12.041	12.041	0	12.043	12.044	12.045	10	12.046	12.047	12.048	25	12.050	12.051	12.051	30	12.052	12.052	12.051	40	12.050	12.050	12.050	55	12.045	12.044	12.043	60	12.040	12.039	12.039	—	—	—	—
Temperature [°C]	Input Volt. 4.5[V]	Input Volt. 5.0[V]	Input Volt. 9.0[V]																																																				
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																				
-30	12.033	12.033	12.034																																																				
-20	12.036	12.037	12.038																																																				
-10	12.040	12.041	12.041																																																				
0	12.043	12.044	12.045																																																				
10	12.046	12.047	12.048																																																				
25	12.050	12.051	12.051																																																				
30	12.052	12.052	12.051																																																				
40	12.050	12.050	12.050																																																				
55	12.045	12.044	12.043																																																				
60	12.040	12.039	12.039																																																				
—	—	—	—																																																				

# COSEL

Model		ZUS30512
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	
Object	+12V0.25A	

1. Graph

-----□----- Load 50%

-----△----- Load 100%

[V]

Input Voltage

Ambient Temperature [°C]

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

Ambient Temp. [°C]	Load 50%	Load 100%
	Input Volt. [V]	Input Volt. [V]
-30	2.9	3.7
-20	2.8	3.6
-10	2.8	3.5
0	2.7	3.5
10	2.7	3.5
25	2.6	3.4
30	2.6	3.3
40	2.6	3.3
55	2.5	3.3
60	2.5	3.3
—	—	—

2. Values

# COSEL

Model		ZUS30512	Testing Circuitry	Figure A
Item		Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)		
Object		+12V0.25A		

1. Graph

-----□-----

Load 50%

———△———

Load 100%

[mV]

30

20

10

0

Ripple Voltage

Ambient Temperature

[°C]

-40

-20

0

20

40

60

Input Volt. 4.5 V


Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temp. [°C]	Load 50%	Load 100%
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
-30	5	10
-20	5	10
-10	5	10
0	5	10
10	5	10
25	5	10
30	5	10
40	5	5
55	5	5
60	5	5
—	—	—

**COSEL**

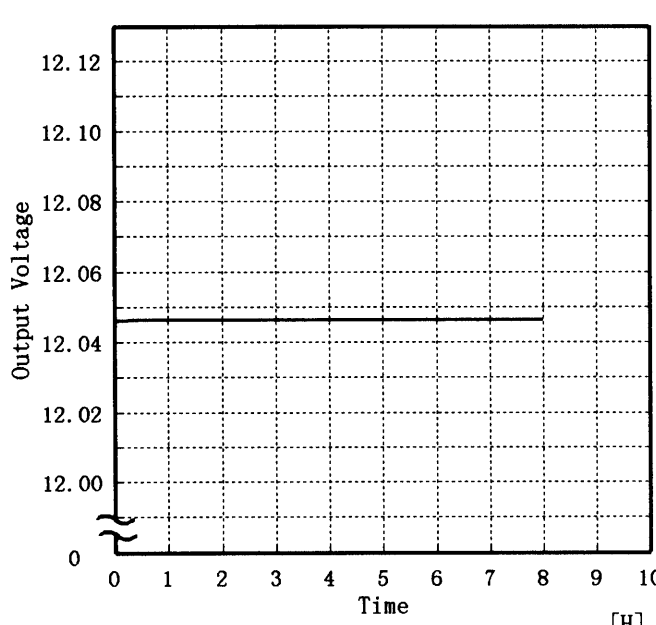COSEL																									
Model	ZUS30512																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
Object	+12V0.25A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage</div> <div>Time</div> <div>[H]</div> <div>Input Volt. 5V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.047</td></tr><tr><td>0.5</td><td>12.046</td></tr><tr><td>1.0</td><td>12.046</td></tr><tr><td>2.0</td><td>12.046</td></tr><tr><td>3.0</td><td>12.046</td></tr><tr><td>4.0</td><td>12.046</td></tr><tr><td>5.0</td><td>12.046</td></tr><tr><td>6.0</td><td>12.046</td></tr><tr><td>7.0</td><td>12.046</td></tr><tr><td>8.0</td><td>12.046</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.047	0.5	12.046	1.0	12.046	2.0	12.046	3.0	12.046	4.0	12.046	5.0	12.046	6.0	12.046	7.0	12.046	8.0	12.046
Time since start [H]	Output Voltage [V]																								
0.0	12.047																								
0.5	12.046																								
1.0	12.046																								
2.0	12.046																								
3.0	12.046																								
4.0	12.046																								
5.0	12.046																								
6.0	12.046																								
7.0	12.046																								
8.0	12.046																								

**COSEL**

Model	ZUS30512	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V0.25A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 4.5~9.0 V

Load Current : 0.00~0.25 A

$$* \text{Output Voltage Accuracy} = \pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$$

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

## 定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 4.5~9.0 V

負荷電流 : 0.00~0.25 A

$$* \text{定電圧精度 (変動値)} = \pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$$

$$* \text{定電圧精度 (変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	25	9.0	0.00	12.058	±10	±0.1
Minimum Voltage	-20	4.5	0.25	12.038		

# COSEL

COSEL

Model	ZUS30512
Item	Condensation 結露特性
Object	+12V0.25A

Testing Circuitry      Figure A

1. Condensation test

Testing procedure is as follows.

① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.

② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.

③ Testing electrical characteristics of the unit to confirm there be no fault.

④ Repeating ①,② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で－10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	11.915	5	10
	2	11.916	5	10
	3	11.916	5	10
Load 100 %	1	11.914	5	15
	2	11.915	5	15
	3	11.915	5	15

Input Volt. 5.0 V



