



TEST DATA OF ZUS31212

(12.0V INPUT)

Regulated DC Power Supply

Date : Nov. 5. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : y. Nagai
Design Engineer


コーセル株式会社
COSEL CO., LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

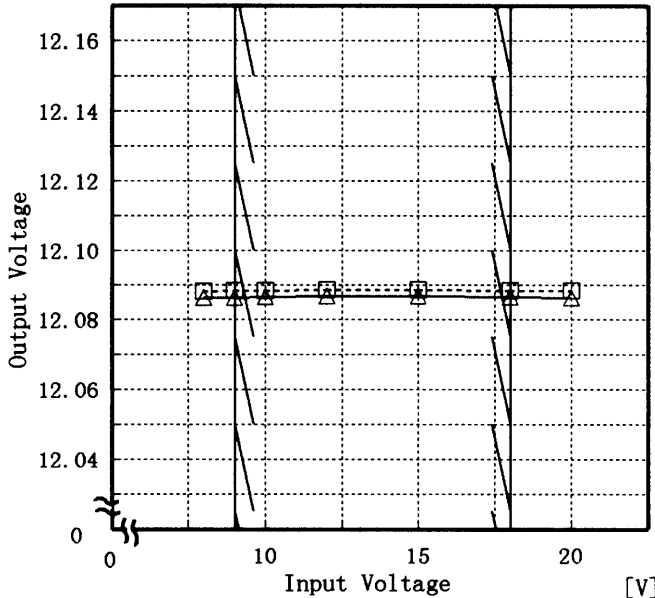Model		ZUS31212	Temperature25℃ Testing CircuitryFigure A																																										
Item		Line Regulation 静的入力変動																																											
Object		+12V0.25A																																											
1. Graph		<div><div>-----□-----Load 50%</div><div>-----△-----Load 100%</div></div> <div><div>Output Voltage [V]</div><div></div><div>Input Voltage [V]</div></div> <div>Note: Slanted line shows the range of the rated input voltage.</div> <div>(注)斜線は定格入力電圧範囲を示す。</div>	2. Values																																										
		<table><tr><th rowspan="2">Input Voltage [V]</th><th>Load 50%</th><th>Load 100%</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>8.0</td><td>12.088</td><td>12.086</td></tr><tr><td>9.0</td><td>12.088</td><td>12.086</td></tr><tr><td>10.0</td><td>12.088</td><td>12.087</td></tr><tr><td>12.0</td><td>12.089</td><td>12.087</td></tr><tr><td>15.0</td><td>12.089</td><td>12.087</td></tr><tr><td>18.0</td><td>12.089</td><td>12.087</td></tr><tr><td>20.0</td><td>12.088</td><td>12.086</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>	Input Voltage [V]	Load 50%	Load 100%	Output Volt. [V]	Output Volt. [V]	8.0	12.088	12.086	9.0	12.088	12.086	10.0	12.088	12.087	12.0	12.089	12.087	15.0	12.089	12.087	18.0	12.089	12.087	20.0	12.088	12.086	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—		
Input Voltage [V]	Load 50%	Load 100%																																											
	Output Volt. [V]	Output Volt. [V]																																											
8.0	12.088	12.086																																											
9.0	12.088	12.086																																											
10.0	12.088	12.087																																											
12.0	12.089	12.087																																											
15.0	12.089	12.087																																											
18.0	12.089	12.087																																											
20.0	12.088	12.086																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											
—	—	—																																											

COSEL

Model	ZUS31212	Temperature	25°C
Item	Efficiency 効率	Testing Circuitry	Figure A
Object			

1. Graph

-----□----- Load 50%

-----△----- Load 100%

Efficiency [%]

80

72

64

56

48

0

0

10

15

20

Input Voltage [V]


2. Values

Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]
8.0	73.4	75.3
9.0	72.2	75.6
10.0	71.0	76.2
12.0	67.9	75.6
15.0	63.7	73.6
18.0	61.2	71.6
20.0	59.0	70.1
—	—	—
—	—	—
—	—	—
—	—	—
—	—	—

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

COSEL

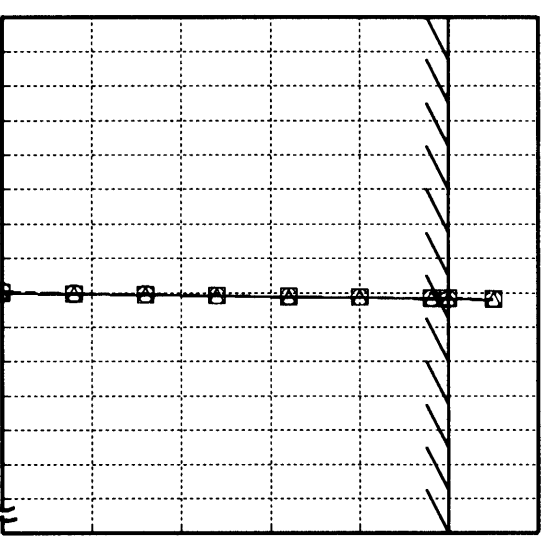
Model		ZUS31212		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12V0.25A																																																				
1. Graph				2. Values																																																		
<div><div><div>—△—</div><div>---□---</div><div>---○---</div></div><div>Input Volt. 9.0V</div><div>Input Volt. 12.0V</div><div>Input Volt. 18.0V</div></div> <div><div><div>Output Voltage [V]</div><div>12.23</div><div>12.19</div><div>12.15</div><div>12.11</div><div>12.07</div><div>12.03</div><div>11.99</div><div>0</div></div><div><div>Load Current [A]</div><div>0</div><div>0.1</div><div>0.2</div><div>0.3</div></div></div>  <div>Note: Slanted line shows the range of the rated load current.</div> <div>(注)斜線は定格負荷電流範囲を示す。</div>				<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 9.0[V]</th><th>Input Volt. 12.0[V]</th><th>Input Volt. 18.0[V]</th></tr><tr><th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr><tr><td>0.00</td><td>12.090</td><td>12.090</td><td>12.091</td></tr><tr><td>0.04</td><td>12.089</td><td>12.090</td><td>12.090</td></tr><tr><td>0.08</td><td>12.089</td><td>12.089</td><td>12.089</td></tr><tr><td>0.12</td><td>12.088</td><td>12.089</td><td>12.089</td></tr><tr><td>0.16</td><td>12.088</td><td>12.088</td><td>12.088</td></tr><tr><td>0.20</td><td>12.087</td><td>12.087</td><td>12.087</td></tr><tr><td>0.24</td><td>12.087</td><td>12.087</td><td>12.087</td></tr><tr><td>0.25</td><td>12.087</td><td>12.087</td><td>12.087</td></tr><tr><td>0.28</td><td>12.086</td><td>12.087</td><td>12.086</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	12.090	12.090	12.091	0.04	12.089	12.090	12.090	0.08	12.089	12.089	12.089	0.12	12.088	12.089	12.089	0.16	12.088	12.088	12.088	0.20	12.087	12.087	12.087	0.24	12.087	12.087	12.087	0.25	12.087	12.087	12.087	0.28	12.086	12.087	12.086	—	—	—	—
Load Current [A]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]																																																			
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																																			
0.00	12.090	12.090	12.091																																																			
0.04	12.089	12.090	12.090																																																			
0.08	12.089	12.089	12.089																																																			
0.12	12.088	12.089	12.089																																																			
0.16	12.088	12.088	12.088																																																			
0.20	12.087	12.087	12.087																																																			
0.24	12.087	12.087	12.087																																																			
0.25	12.087	12.087	12.087																																																			
0.28	12.086	12.087	12.086																																																			
—	—	—	—																																																			

COSEL

Model	ZUS31212
Item	Ripple Voltage (by Load Current) リップル電圧(負荷電流特性)
Object	+12V0.25A

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- Input Volt. 9.0V
 -----△----- Input Volt. 18.0V

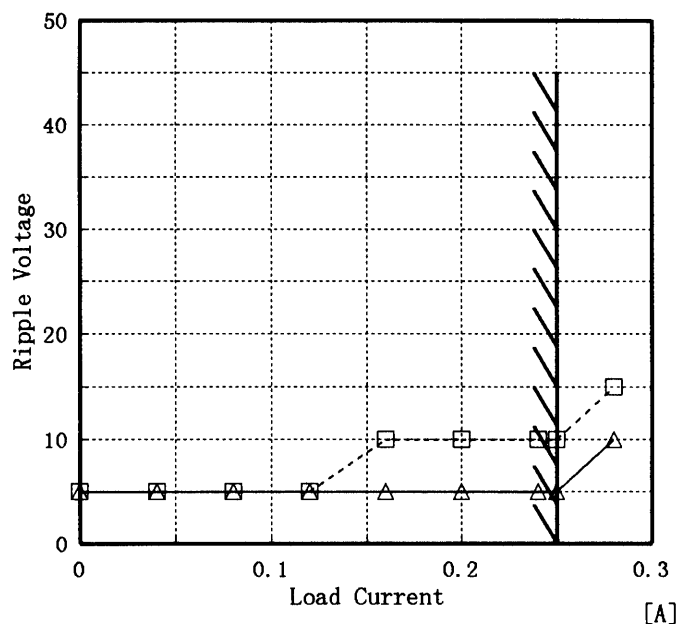

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p-p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期


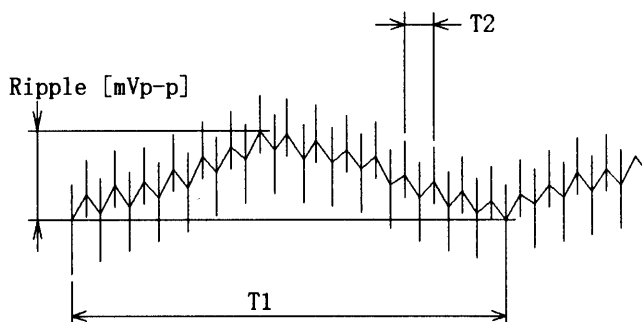


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

2. Values

Load Current [A]	Input Volt. 9.0 [V]	Input Volt. 18.0 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	5	5
0.04	5	5
0.08	5	5
0.12	5	5
0.16	10	5
0.20	10	5
0.24	10	5
0.25	10	5
0.28	15	10
—	—	—
—	—	—

COSEL

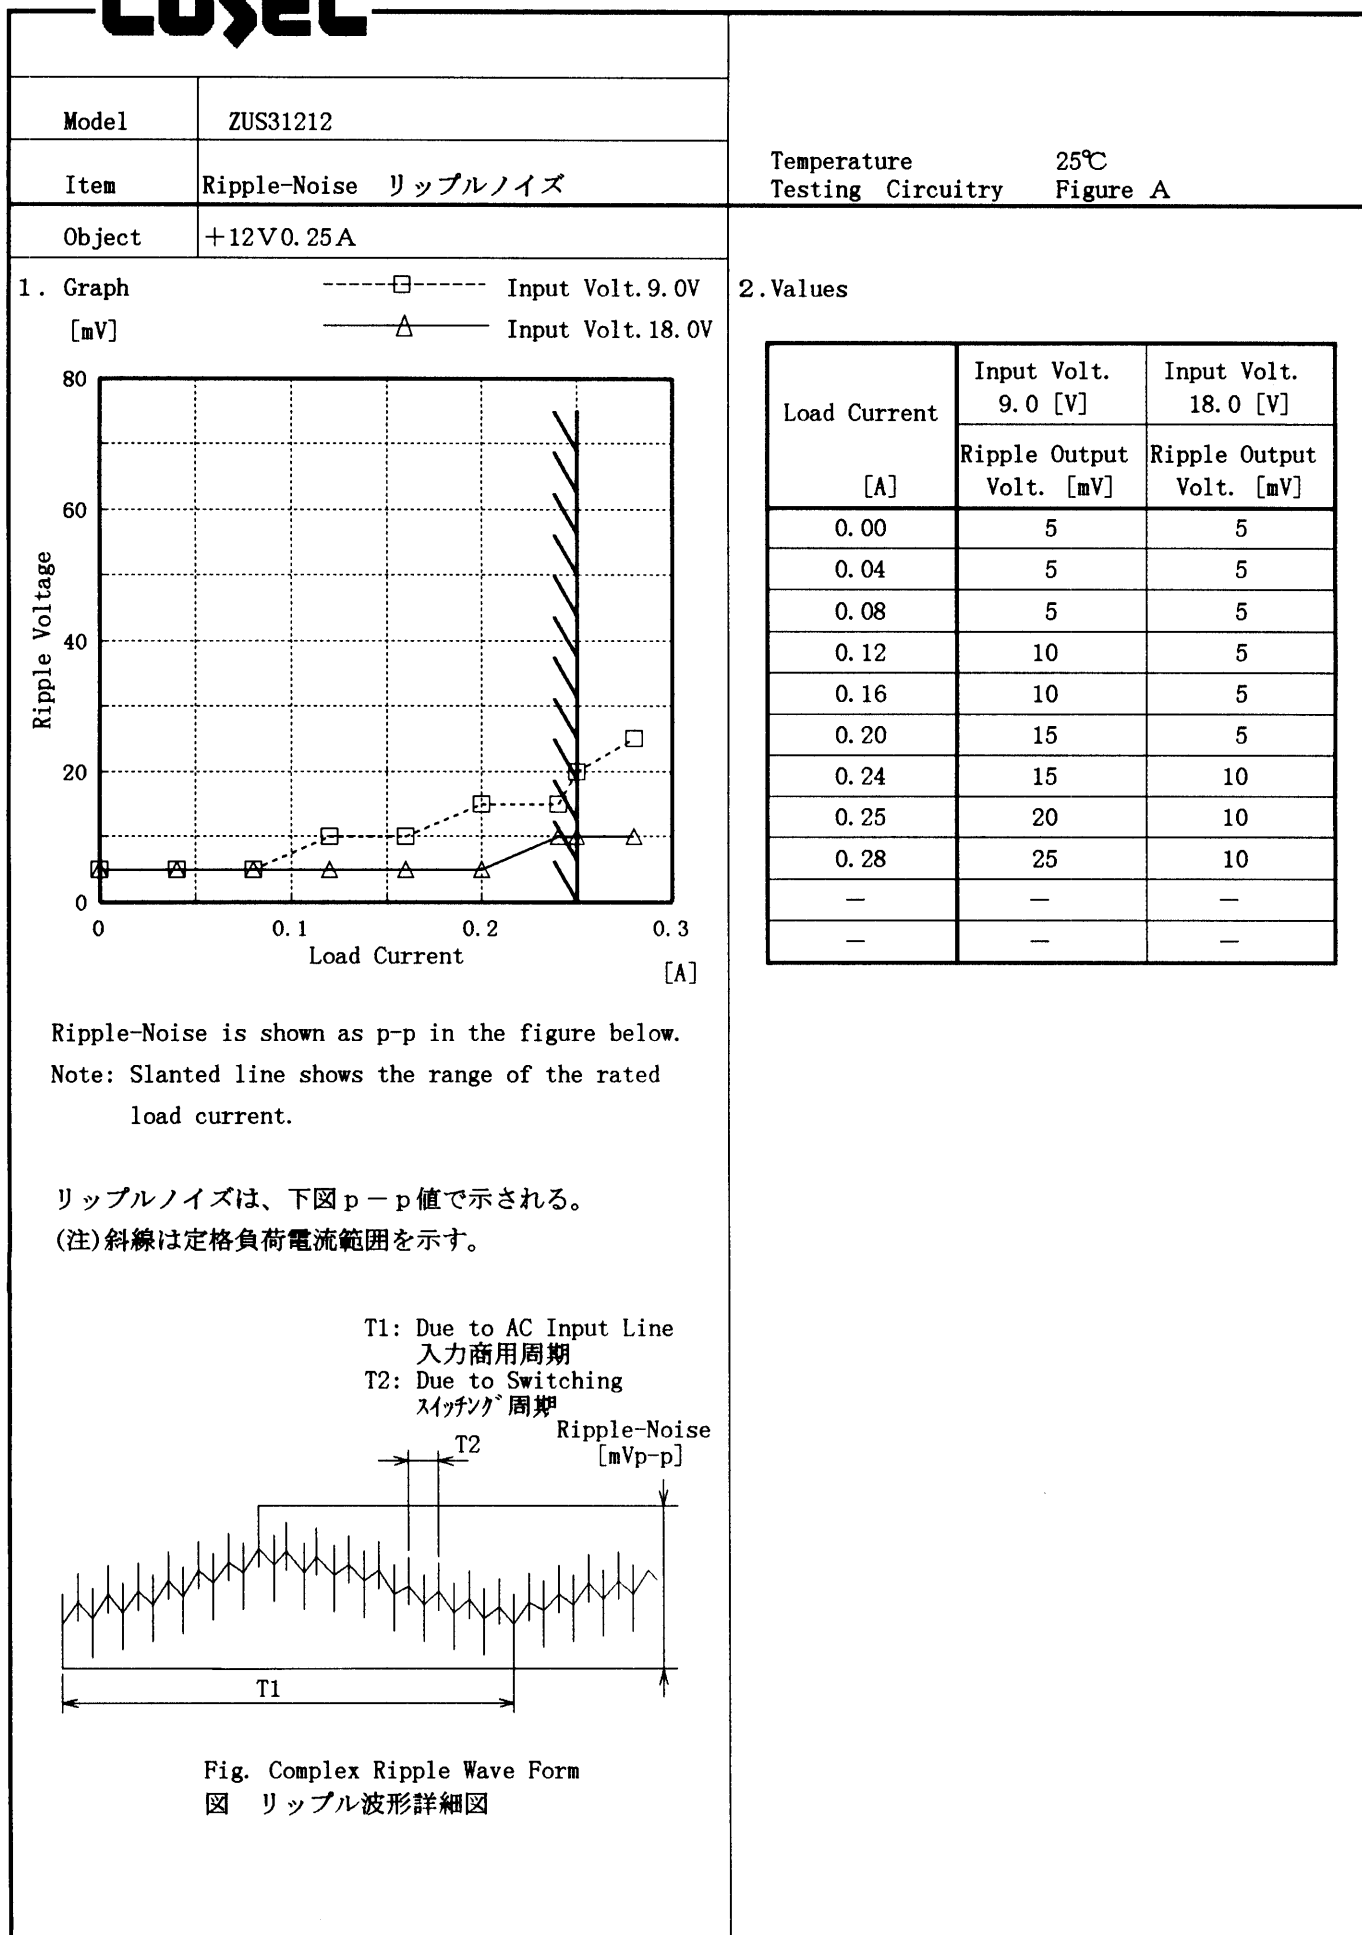

COSEL

Model		ZUS31212	Temperature25℃ Testing CircuitryFigure A
Item		Overcurrent Protection 過電流保護	
Object		+12V0.25A	

1. Graph

[V]

20

15

10

5

0

0

0.1

0.2

0.3

0.4

0.5

Output Voltage

Load Current

Input Volt. 9.0V

Input Volt. 12.0V

Input Volt. 18.0V

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]
	Load Curr-ent [A]	Load Curr-ent [A]	Load Curr-ent [A]
12.00	0.38	0.43	0.38
11.40	0.38	0.43	0.38
10.80	0.39	0.43	0.38
9.60	0.39	0.43	0.37
8.40	0.40	0.43	0.36
7.20	0.40	0.42	0.35
6.00	0.39	0.41	0.33
4.80	0.38	0.39	0.31
3.60	0.36	0.36	0.28
2.40	0.34	0.32	0.24
1.20	0.30	0.27	0.22
0.00	0.27	0.25	0.22

COSEL

Model	ZUS31212	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.25A		

Input Volt. 12.0 V


Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %


100 mV/div

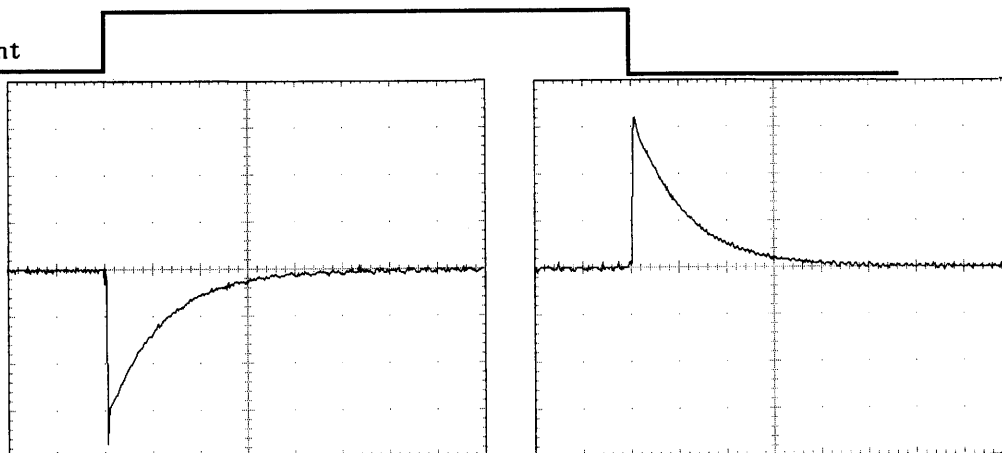

Min. Load ↔

Load 50 %


100 mV/div

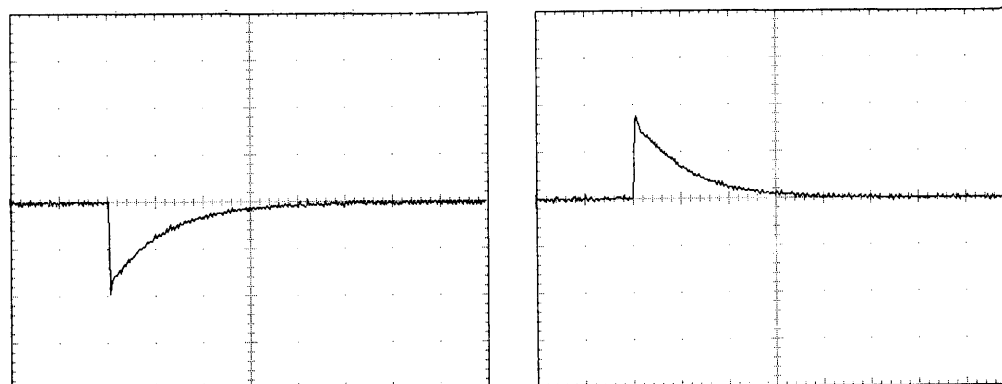

Load 50% ↔

Load 100 %

100 mV/div

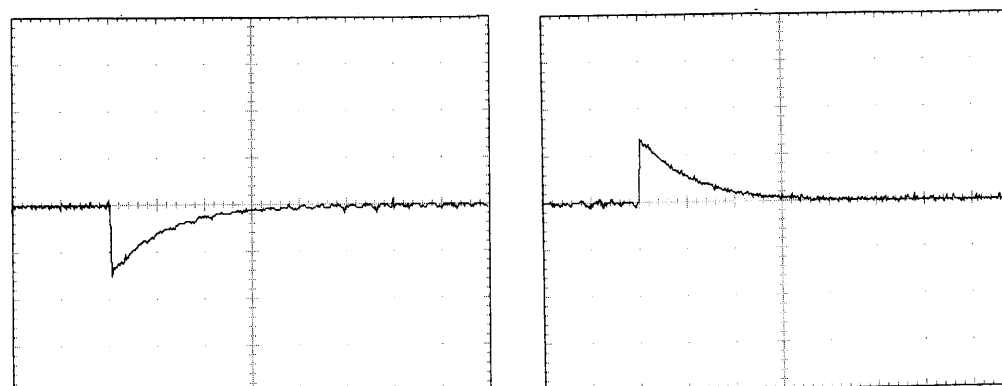


1 mS/div

COSEL

Model	ZUS31212	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.25A		

1. Graph


Input Volt. 9.0 V

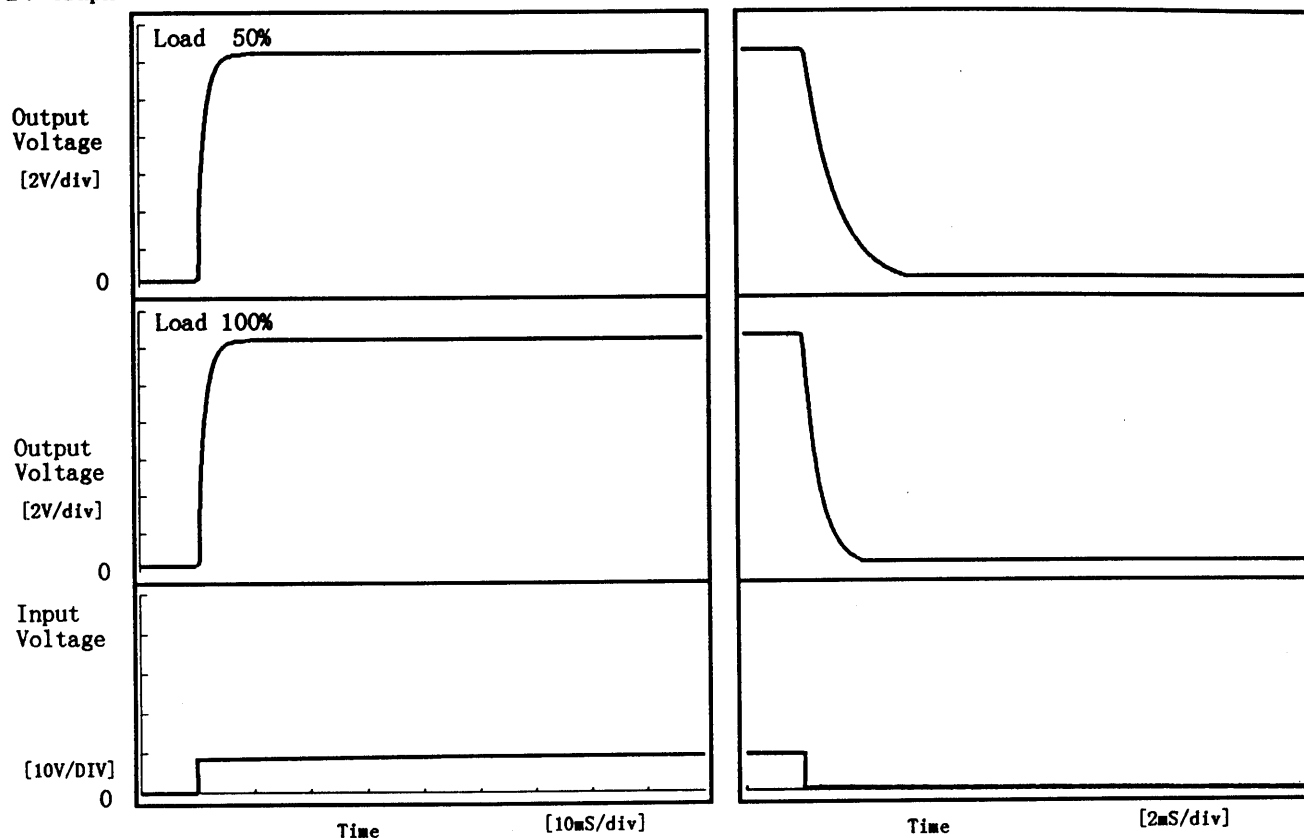

2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.45	2.55	3.00	0.28	2.19
100 %	0.45	2.60	3.05	0.14	1.16

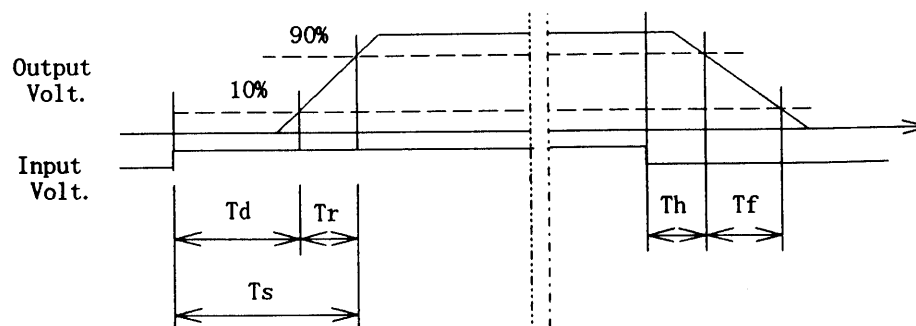


COSEL

Model	ZUS31212
Item	Ambient Temperature Drift 周囲温度変動
Object	+12V0.25A

Testing Circuitry Figure A

1. Graph
- △— Input Volt. 9.0V
 - - -□- - - Input Volt. 12.0V
 - - -○- - - Input Volt. 18.0V

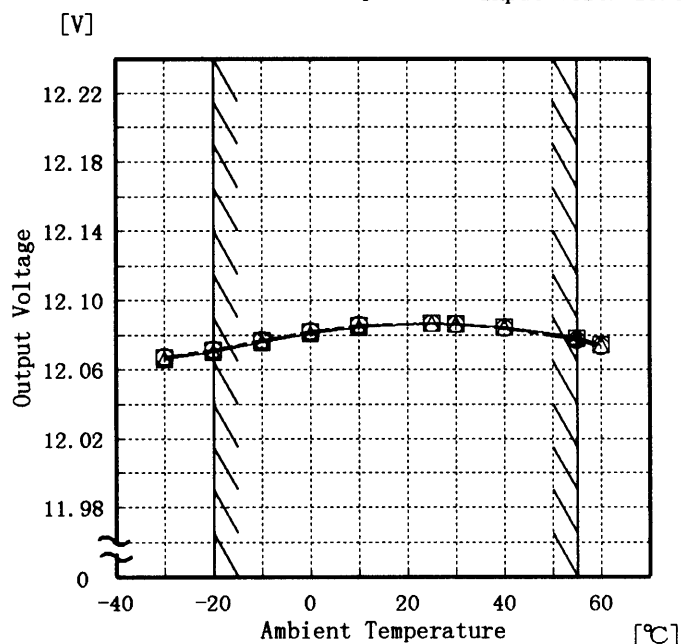


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Temperature [°C]	Input Volt. 9.0[V]	Input Volt. 12.0[V]	Input Volt. 18.0[V]
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]
-30	12.066	12.067	12.068
-20	12.070	12.071	12.072
-10	12.076	12.077	12.077
0	12.081	12.082	12.082
10	12.085	12.085	12.086
25	12.087	12.087	12.087
30	12.086	12.087	12.086
40	12.085	12.084	12.084
55	12.079	12.078	12.077
60	12.075	12.075	12.074
—	—	—	—

Testing Circuitry Figure A


Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL

Model ZUS31212		Testing Circuitry Figure A																																						
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																							
Object	+12V0.25A																																							
1. Graph <div> <div> <div>-----□-----</div> <div>Load 50%</div> </div> <div> <div>——△——</div> <div>Load 100%</div> </div> </div> <div> <div>[mV]</div> <div>60</div> <div>Ripple Voltage</div> <div>40</div> <div>20</div> <div>0</div> <div>-40</div> <div>-20</div> <div>0</div> <div>20</div> <div>40</div> <div>60</div> <div>Ambient Temperature</div> <div>[°C]</div> </div> <div>Input Volt. 9.0 V</div> <div>Note: Slanted line shows the range of the rated ambient temperature.</div> <div>(注)斜線は定格周囲温度範囲を示す。</div>		2. Values <table> <tr> <th rowspan="2">Ambient Temp. [°C]</th><th>Load 50%</th><th>Load 100%</th></tr> <tr> <th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr> <tr><td>-30</td><td>10</td><td>25</td></tr> <tr><td>-20</td><td>10</td><td>20</td></tr> <tr><td>-10</td><td>5</td><td>15</td></tr> <tr><td>0</td><td>5</td><td>10</td></tr> <tr><td>10</td><td>5</td><td>10</td></tr> <tr><td>25</td><td>5</td><td>10</td></tr> <tr><td>30</td><td>5</td><td>10</td></tr> <tr><td>40</td><td>5</td><td>10</td></tr> <tr><td>55</td><td>5</td><td>10</td></tr> <tr><td>60</td><td>5</td><td>10</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </table>	Ambient Temp. [°C]	Load 50%	Load 100%	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	-30	10	25	-20	10	20	-10	5	15	0	5	10	10	5	10	25	5	10	30	5	10	40	5	10	55	5	10	60	5	10	—	—	—
Ambient Temp. [°C]	Load 50%	Load 100%																																						
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																						
-30	10	25																																						
-20	10	20																																						
-10	5	15																																						
0	5	10																																						
10	5	10																																						
25	5	10																																						
30	5	10																																						
40	5	10																																						
55	5	10																																						
60	5	10																																						
—	—	—																																						

COSEL

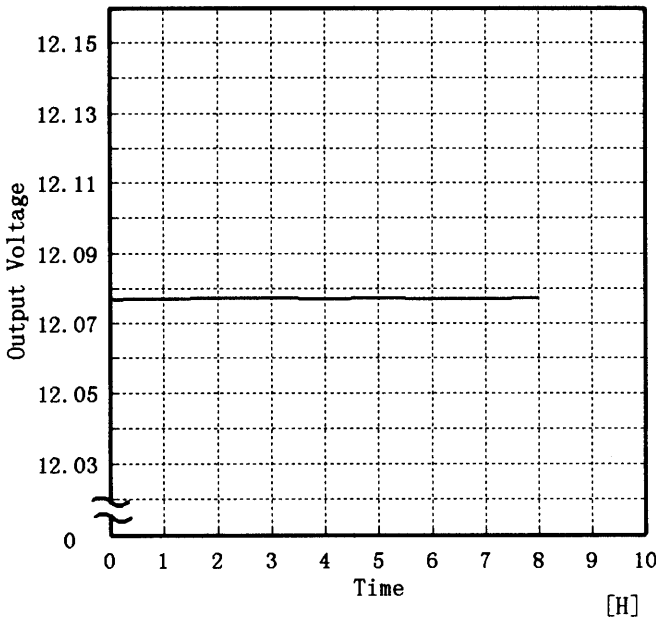Model	ZUS31212																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
Object	+12V0.25A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<div>[V]</div> <div></div> <div>Output Voltage [V]</div> <div>Time [H]</div> <div>Input Volt. 12V</div> <div>Load 100%</div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.078</td></tr><tr><td>0.5</td><td>12.077</td></tr><tr><td>1.0</td><td>12.077</td></tr><tr><td>2.0</td><td>12.077</td></tr><tr><td>3.0</td><td>12.077</td></tr><tr><td>4.0</td><td>12.077</td></tr><tr><td>5.0</td><td>12.077</td></tr><tr><td>6.0</td><td>12.077</td></tr><tr><td>7.0</td><td>12.077</td></tr><tr><td>8.0</td><td>12.077</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.078	0.5	12.077	1.0	12.077	2.0	12.077	3.0	12.077	4.0	12.077	5.0	12.077	6.0	12.077	7.0	12.077	8.0	12.077
Time since start [H]	Output Voltage [V]																								
0.0	12.078																								
0.5	12.077																								
1.0	12.077																								
2.0	12.077																								
3.0	12.077																								
4.0	12.077																								
5.0	12.077																								
6.0	12.077																								
7.0	12.077																								
8.0	12.077																								

COSEL

Model	ZUS31212	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V0.25A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 9.0~18.0 V

Load Current : 0.00~0.25 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -20~55 °C

入力電圧 : 9.0~18.0 V

負荷電流 : 0.00~0.25 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ratio) [%]
Maximum Voltage	25	18.0	0.00	12.092	±10	±0.1
Minimum Voltage	-20	9.0	0.25	12.072		

COSEL

COLL

Model	ZUS31212
Item	Condensation 結露特性
Object	+12V0.25A

Testing Circuitry Figure A

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①,② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で－１０℃に冷却しておき、約１時間後に恒温槽から取り出し、室温２５℃、湿度４０％RHの状態におき結露させ、その電気的特性の測定を３度行い、異常のないことを確認する。

2. Values

	Times	Output Voltage [V]	Ripple Voltage [mV]	Ripple Noise [mV]
Load 50 %	1	12.099	5	10
	2	12.097	5	10
	3	12.097	5	10
Load 100 %	1	12.097	10	15
	2	12.096	10	15
	3	12.096	10	15

Input Volt. 12.0 V

