



TEST DATA OF ZUW1R51212
(12.0V INPUT)

Regulated DC Power Supply

Date : June 14. 1996

Approved by : T. Sugimori
Design Manager

Prepared by : K. Shimano
Design Engineer

コーセル株式会社
COSEL CO., LTD.

CONTENTS

| | |
|--|----|
| 1. Line Regulation | 1 |
| 静的入力変動 | |
| 2. Efficiency | 2 |
| 効率 | |
| 3. Load Regulation | 3 |
| 静的負荷変動 | |
| 4. Ripple Voltage (by Load Current) | 4 |
| リップル電圧(負荷電流特性) | |
| 5. Ripple-Noise | 6 |
| リップルノイズ | |
| 6. Overcurrent Protection | 8 |
| 過電流保護 | |
| 7. Dynamic Load Responce | 9 |
| 動的負荷変動 | |
| 8. Rise and Fall Time | 11 |
| 立上り、立下がり時間 | |
| 9. Ambient Temperature Drift | 13 |
| 周囲温度変動 | |
| 10. Minimum Input Voltage for Regulated Output Voltage | 14 |
| 最低レギュレーション電圧 | |
| 11. Ripple Voltage (by Ambient Temperature) | 15 |
| リップル電圧(周囲温度特性) | |
| 12. Time Lapse Drift | 16 |
| 経時ドリフト | |
| 13. Output Voltage Accuracy | 17 |
| 定電圧精度 | |
| 14. Condensation | 18 |
| 結露特性 | |
| 15. Figure of Testing Circuitry | 20 |
| 測定回路図 | |

(Final Page 20)


COSEL

Model ZUW1R51212

Item Line Regulation 静的入力変動

Object +12V 0.065A

1. Graph

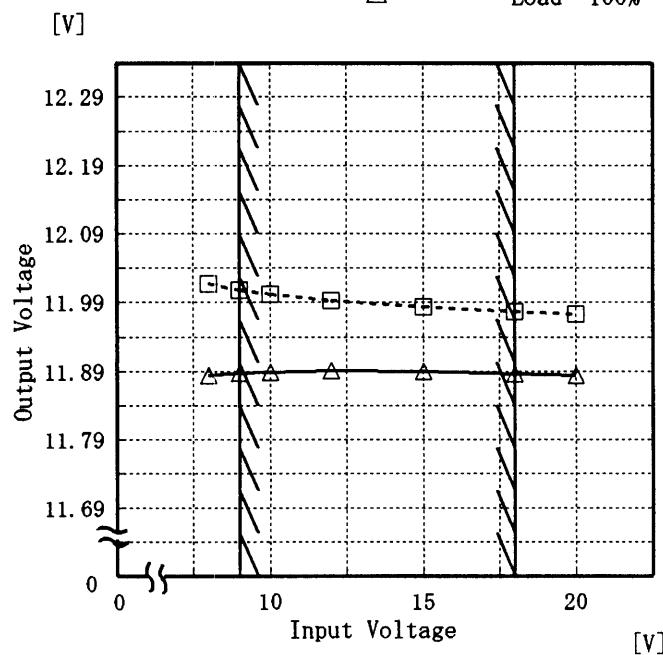
Load 50%
Load 100%Temperature 25°C
Testing Circuitry Figure A

2. Values

| Input Voltage [V] | Load 50% | Load 100% |
|-------------------|------------------|------------------|
| | Output Volt. [V] | Output Volt. [V] |
| 8.0 | 12.017 | 11.884 |
| 9.0 | 12.008 | 11.887 |
| 10.0 | 12.002 | 11.889 |
| 12.0 | 11.993 | 11.891 |
| 15.0 | 11.984 | 11.889 |
| 18.0 | 11.977 | 11.886 |
| 20.0 | 11.973 | 11.884 |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |

Object -12V 0.065A

1. Graph

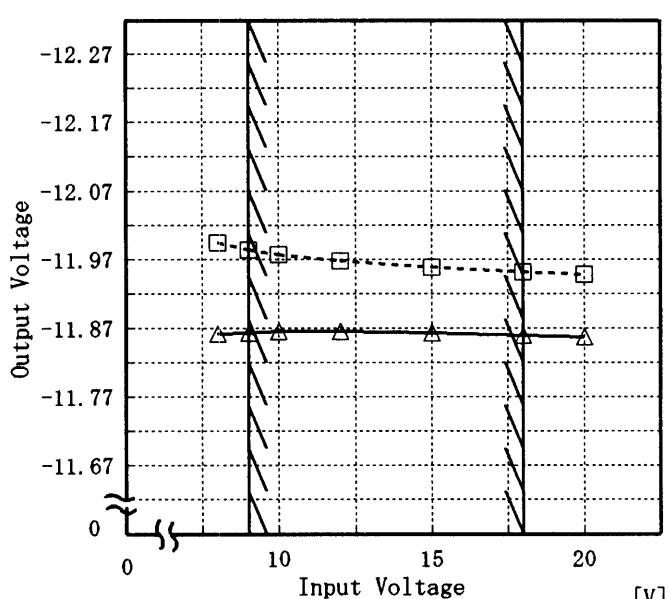Load 50%
Load 100%

2. Values

| Input Voltage [V] | Load 50% | Load 100% |
|-------------------|------------------|------------------|
| | Output Volt. [V] | Output Volt. [V] |
| 8.0 | -11.994 | -11.861 |
| 9.0 | -11.984 | -11.864 |
| 10.0 | -11.977 | -11.865 |
| 12.0 | -11.968 | -11.865 |
| 15.0 | -11.958 | -11.863 |
| 18.0 | -11.951 | -11.859 |
| 20.0 | -11.947 | -11.857 |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |

Note: Slanted line shows the range of the rated input voltage.


(注) 斜線は定格入力電圧範囲を示す。

COSEL

Model ZUW1R51212

Item Efficiency 効率

Object


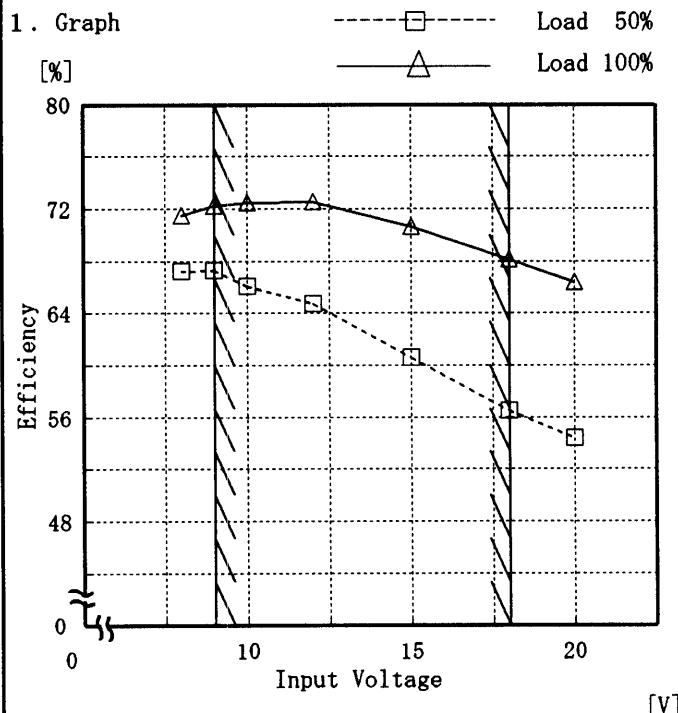
Temperature 25°C
Testing Circuitry Figure A

2. Values

| Input Voltage [V] | Load 50% | Load 100% |
|-------------------|----------------|----------------|
| | Efficiency [%] | Efficiency [%] |
| 8.0 | 67.2 | 71.5 |
| 9.0 | 67.3 | 72.2 |
| 10.0 | 66.1 | 72.5 |
| 12.0 | 64.8 | 72.5 |
| 15.0 | 60.6 | 70.7 |
| 18.0 | 56.5 | 68.2 |
| 20.0 | 54.4 | 66.4 |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |
| — | — | — |

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

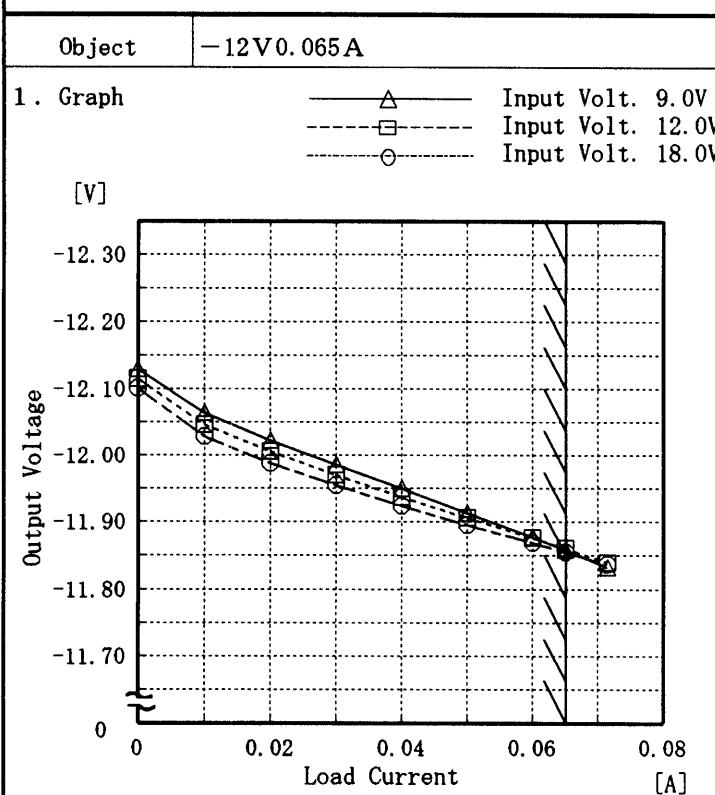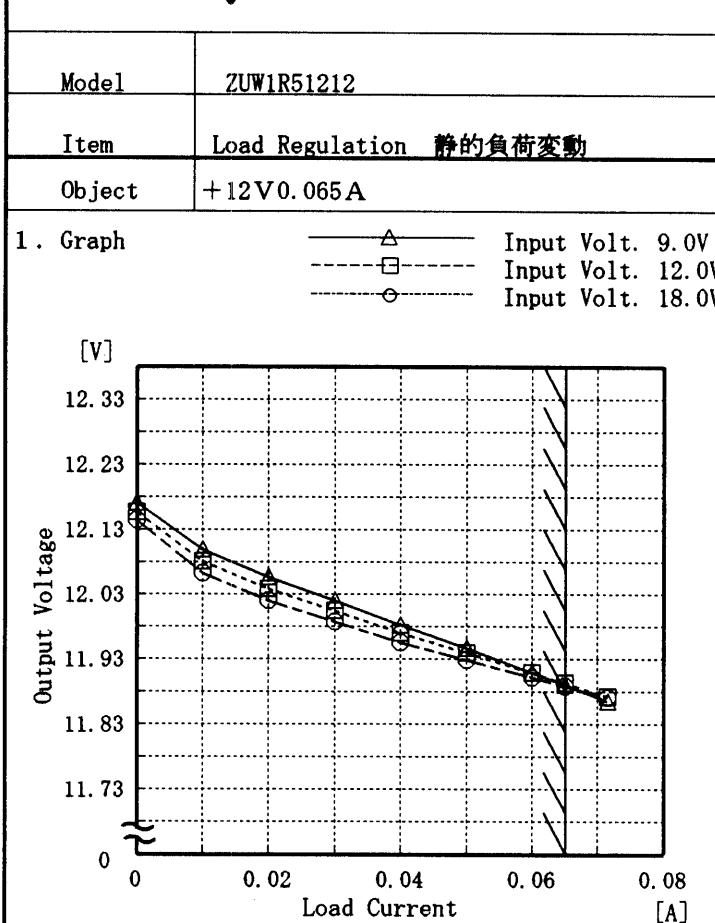
COSEL

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

COSEL

| | |
|--------|---|
| Model | ZUW1R51212 |
| Item | Ripple Voltage(by Load Current) リップル電圧(負荷電流特性) |
| Object | +12V 0.065A |

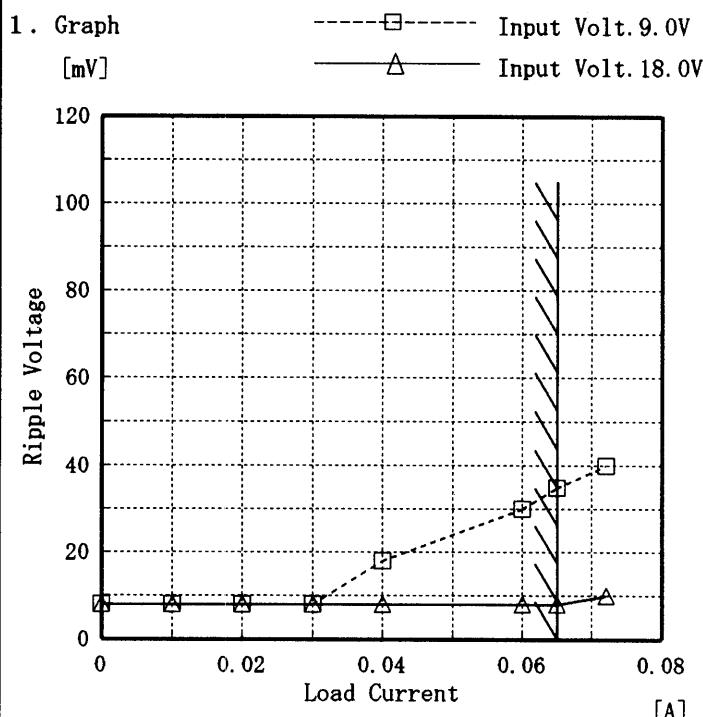Temperature
Testing Circuitry 25°C
Figure A

2. Values

| Load Current [A] | Input Volt. 9.0 [V] | Input Volt. 18.0 [V] |
|---------------------|-----------------------------|-----------------------------|
| | Ripple Output Volt. [mV] | Ripple Output Volt. [mV] |
| 0.000 | 8 | 8 |
| 0.010 | 8 | 8 |
| 0.020 | 8 | 8 |
| 0.030 | 8 | 8 |
| 0.040 | 18 | 8 |
| 0.060 | 30 | 8 |
| 0.065 | 35 | 8 |
| 0.072 | 40 | 10 |
| — | — | — |
| — | — | — |
| — | — | — |

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line
入力商用周期

T2: Due to Switching
スイッチング周期

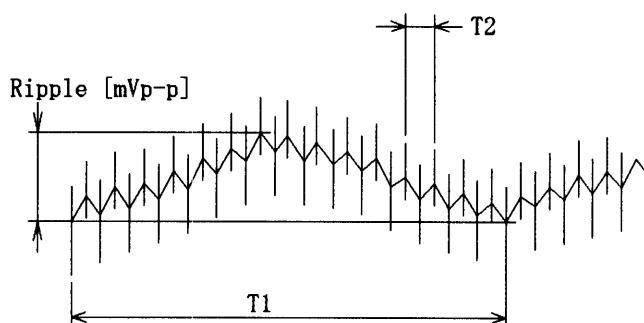
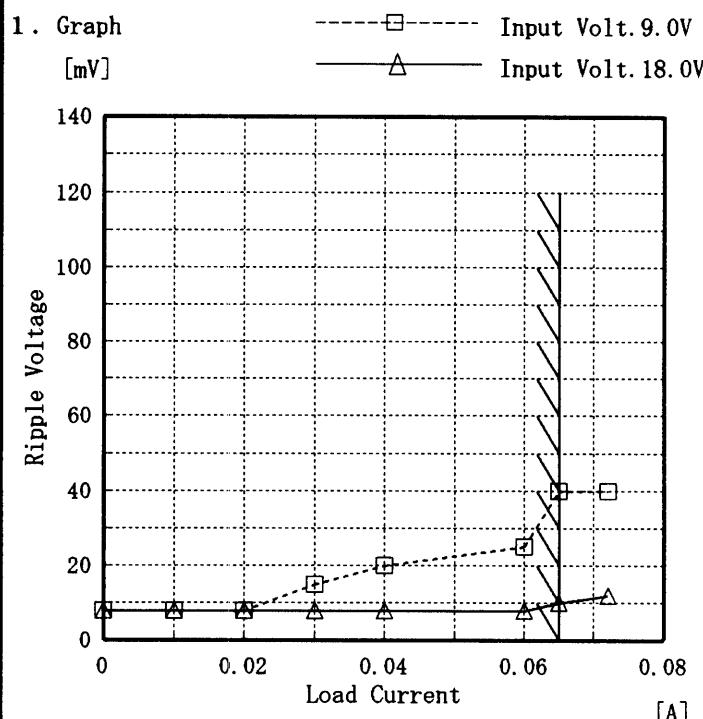


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

| | |
|--------|---|
| Model | ZUW1R51212 |
| Item | Ripple Voltage(by Load Current) リップル電圧(負荷電流特性) |
| Object | -12V 0.065A |

Temperature
Testing Circuitry 25°C
Figure A

2. Values

| Load Current [A] | Input Volt. 9.0 [V] | Input Volt. 18.0 [V] |
|---------------------|-----------------------------|-----------------------------|
| | Ripple Output Volt. [mV] | Ripple Output Volt. [mV] |
| 0.000 | 8 | 8 |
| 0.010 | 8 | 8 |
| 0.020 | 8 | 8 |
| 0.030 | 15 | 8 |
| 0.040 | 20 | 8 |
| 0.060 | 25 | 8 |
| 0.065 | 40 | 10 |
| 0.072 | 40 | 12 |
| — | — | — |
| — | — | — |
| — | — | — |

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。

(注)斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line

入力商用周期

T2: Due to Switching

スイッチング周期

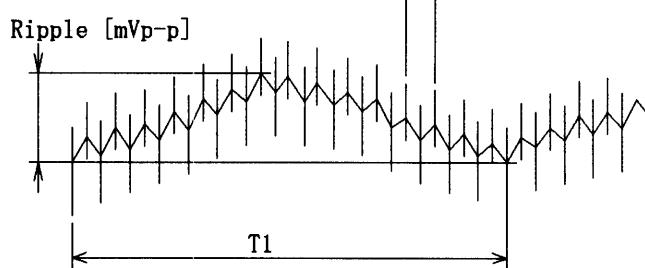
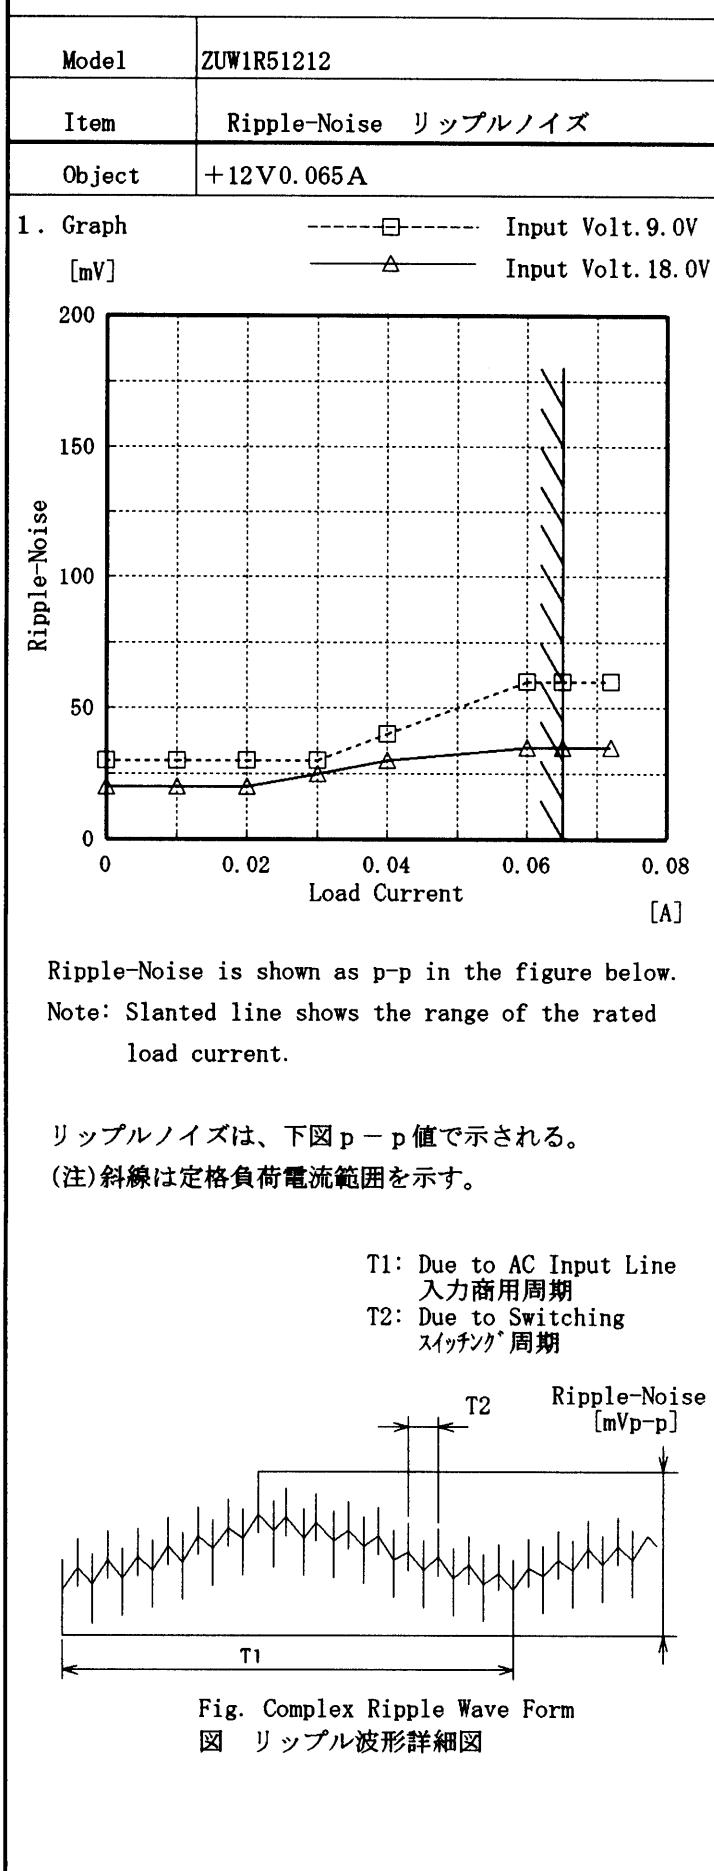


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

COSEL

Temperature
Testing Circuitry 25°C
Figure A


2. Values

| Load current [A] | Input Volt. 9.0 [V] | Input Volt. 18.0 [V] |
|------------------|---------------------|----------------------|
| | Ripple-Noise [mV] | Ripple-Noise [mV] |
| 0.000 | 30 | 20 |
| 0.010 | 30 | 20 |
| 0.020 | 30 | 20 |
| 0.030 | 30 | 25 |
| 0.040 | 40 | 30 |
| 0.060 | 60 | 35 |
| 0.065 | 60 | 35 |
| 0.072 | 60 | 35 |
| — | — | — |
| — | — | — |
| — | — | — |

COSEL

| | |
|--------|----------------------|
| Model | ZUW1R51212 |
| Item | Ripple-Noise リップルノイズ |
| Object | -12V 0.065A |

Temperature 25°C
Testing Circuitry Figure A

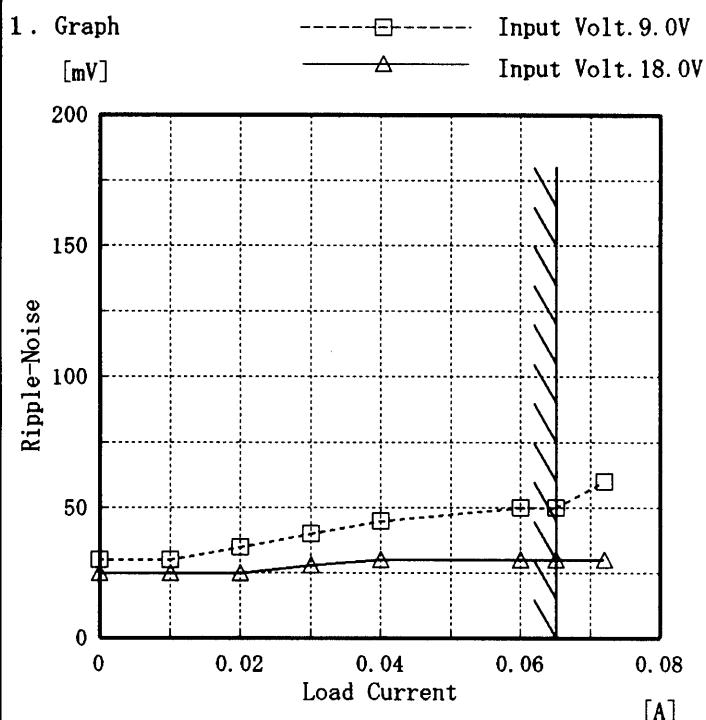

2. Values

| Load current [A] | Input Volt. 9.0 [V] | Input Volt. 18.0 [V] |
|---------------------|------------------------|-------------------------|
| | Ripple-Noise [mV] | Ripple-Noise [mV] |
| 0.000 | 30 | 25 |
| 0.010 | 30 | 25 |
| 0.020 | 35 | 25 |
| 0.030 | 40 | 28 |
| 0.040 | 45 | 30 |
| 0.060 | 50 | 30 |
| 0.065 | 50 | 30 |
| 0.072 | 60 | 30 |
| — | — | — |
| — | — | — |
| — | — | — |

Ripple-Noise is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。
(注)斜線は定格負荷電流範囲を示す。

- T1: Due to AC Input Line
入力商用周期
- T2: Due to Switching
スイッチング周期



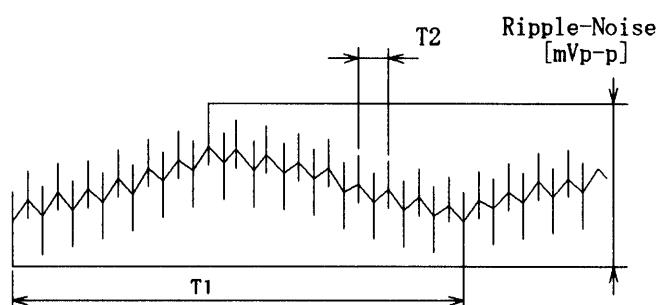


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

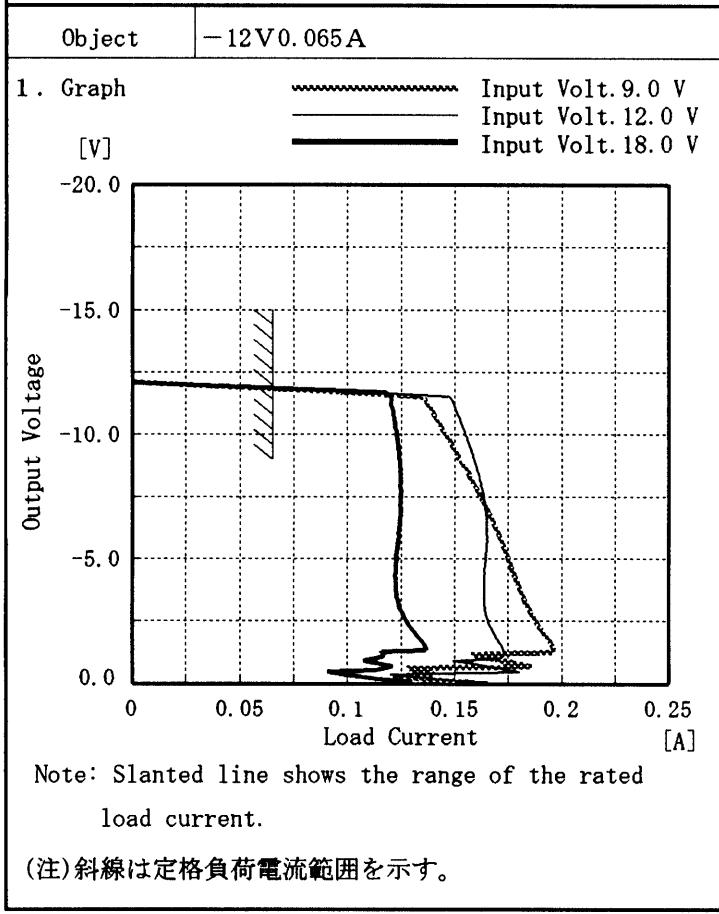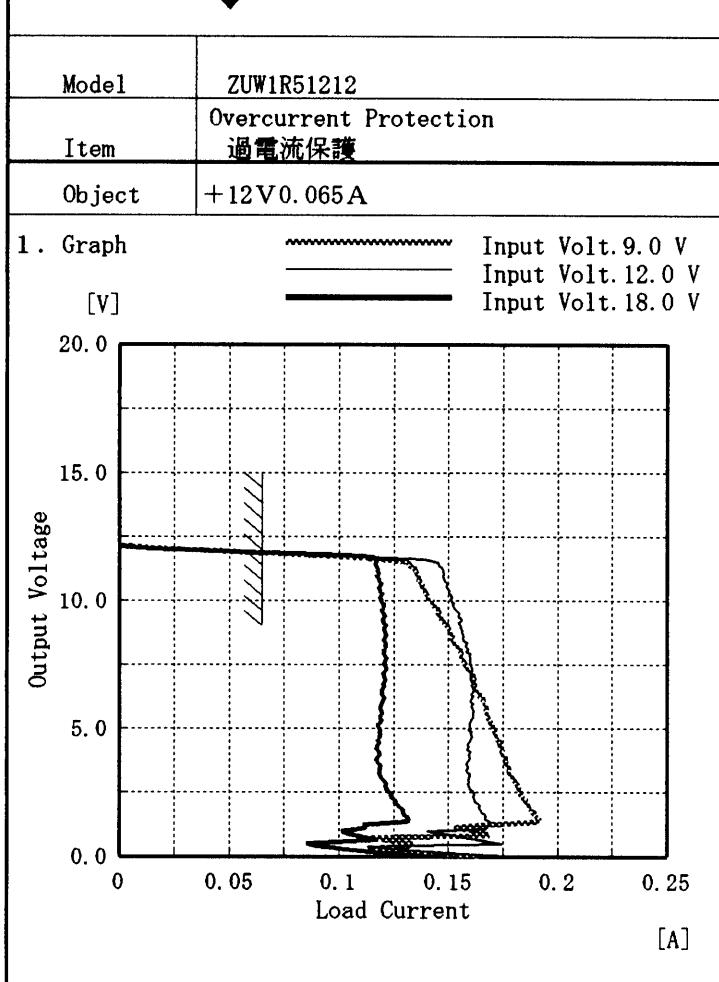

Temperature 25°C
Testing Circuitry Figure A

2. Values

| Output Voltage [V] | Input Volt. 9.0[V] | Input Volt. 12.0[V] | Input Volt. 18.0[V] |
|--------------------|--------------------|---------------------|---------------------|
| | Load Current [A] | Load Current [A] | Load Current [A] |
| -12.00 | 0.080 | 0.103 | 0.109 |
| -11.40 | 0.136 | 0.149 | 0.120 |
| -10.80 | 0.140 | 0.151 | 0.121 |
| -9.60 | 0.148 | 0.156 | 0.123 |
| -8.40 | 0.156 | 0.161 | 0.125 |
| -7.20 | 0.164 | 0.164 | 0.125 |
| -6.00 | 0.170 | 0.165 | 0.124 |
| -4.80 | 0.176 | 0.164 | 0.123 |
| -3.60 | 0.181 | 0.164 | 0.123 |
| -2.40 | 0.188 | 0.165 | 0.128 |
| -1.20 | 0.196 | 0.173 | 0.116 |
| 0.00 | 0.156 | 0.165 | 0.130 |

2. Values

| Output Voltage [V] | Input Volt. 9.0[V] | Input Volt. 12.0[V] | Input Volt. 18.0[V] |
|--------------------|--------------------|---------------------|---------------------|
| | Load Current [A] | Load Current [A] | Load Current [A] |
| -12.00 | 0.080 | 0.103 | 0.109 |
| -11.40 | 0.136 | 0.149 | 0.120 |
| -10.80 | 0.140 | 0.151 | 0.121 |
| -9.60 | 0.148 | 0.156 | 0.123 |
| -8.40 | 0.156 | 0.161 | 0.125 |
| -7.20 | 0.164 | 0.164 | 0.125 |
| -6.00 | 0.170 | 0.165 | 0.124 |
| -4.80 | 0.176 | 0.164 | 0.123 |
| -3.60 | 0.181 | 0.164 | 0.123 |
| -2.40 | 0.188 | 0.165 | 0.128 |
| -1.20 | 0.196 | 0.173 | 0.116 |
| 0.00 | 0.156 | 0.165 | 0.130 |

COSEL

| | |
|--------|---------------------------------|
| Model | ZUW1R51212 |
| Item | Dynamic Load Response 動的負荷變動 |
| Object | +12V 0.065A |

Temperature 25°C
Testing Circuitry Figure A



Input Volt. 12.0 V

Cycle 100 mS



Load Current

Min. Load ←→
Load 100 %



200 mV/div

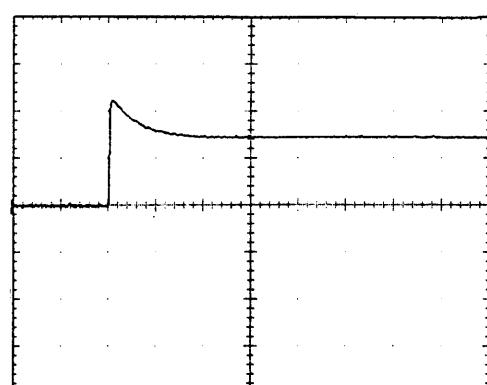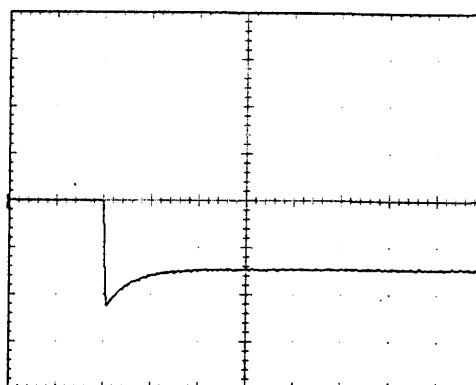Min. Load ←→
Load 50 %

200 mV/div

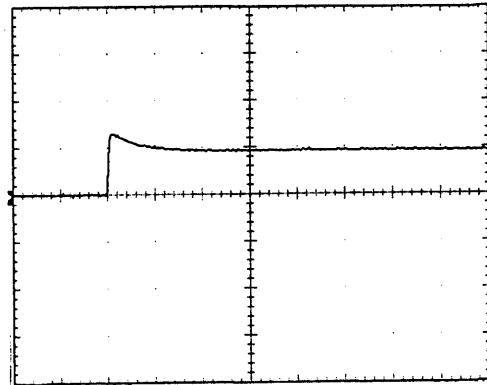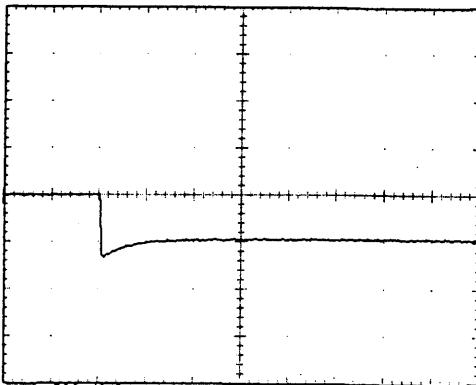Load 50%←→
Load 100 %

200 mV/div

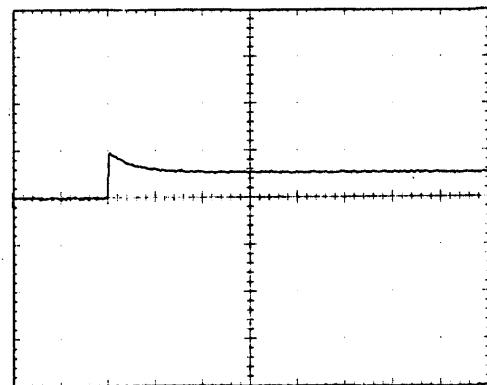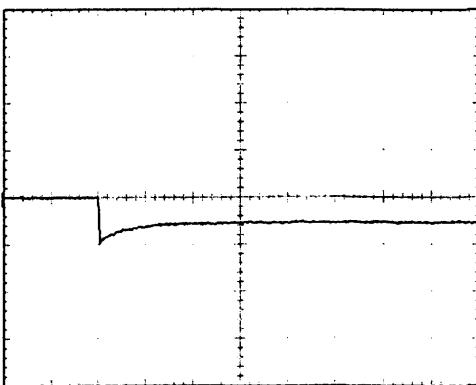

1 mS/div

COSSEL

Model ZUW1R51212

Item Dynamic Load Response
動的負荷變動

Object -12V 0.065A

Temperature 25°C
Testing Circuitry Figure A



Input Volt. 12.0 V

Cycle 100 mS



Load Current

Min. Load ←→
Load 100 %



200 mV/div

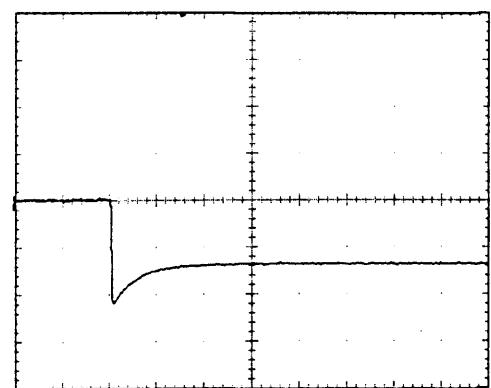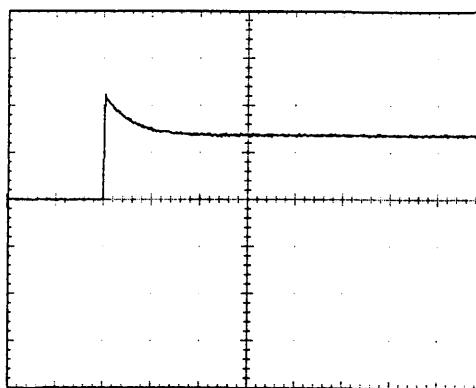Min. Load ←→
Load 50 %

200 mV/div

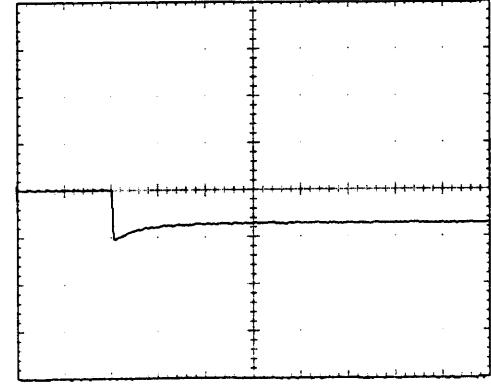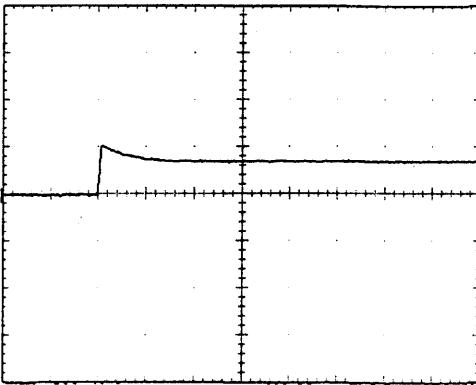Load 50%←→
Load 100 %

200 mV/div

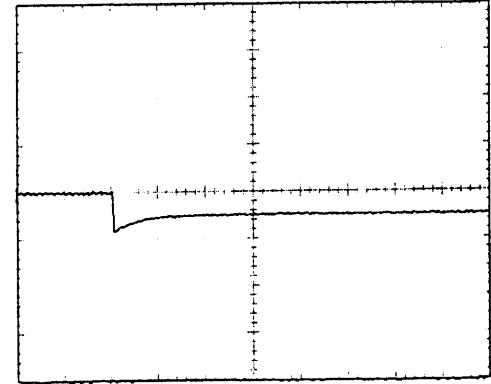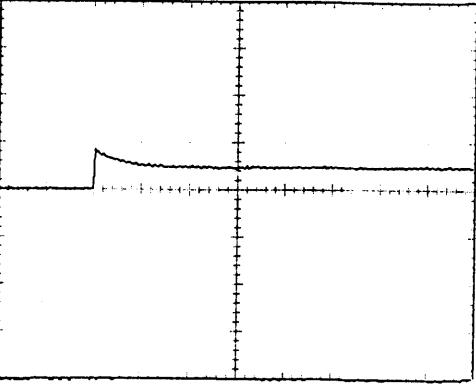


1 mS/div

COSEL

| | |
|--------|------------------------------|
| Model | ZUW1R51212 |
| Item | Rise and Fall Time 立上り、立下り時間 |
| Object | +12V 0.065A |


Temperature 25°C
Testing Circuitry Figure A

1. Graph

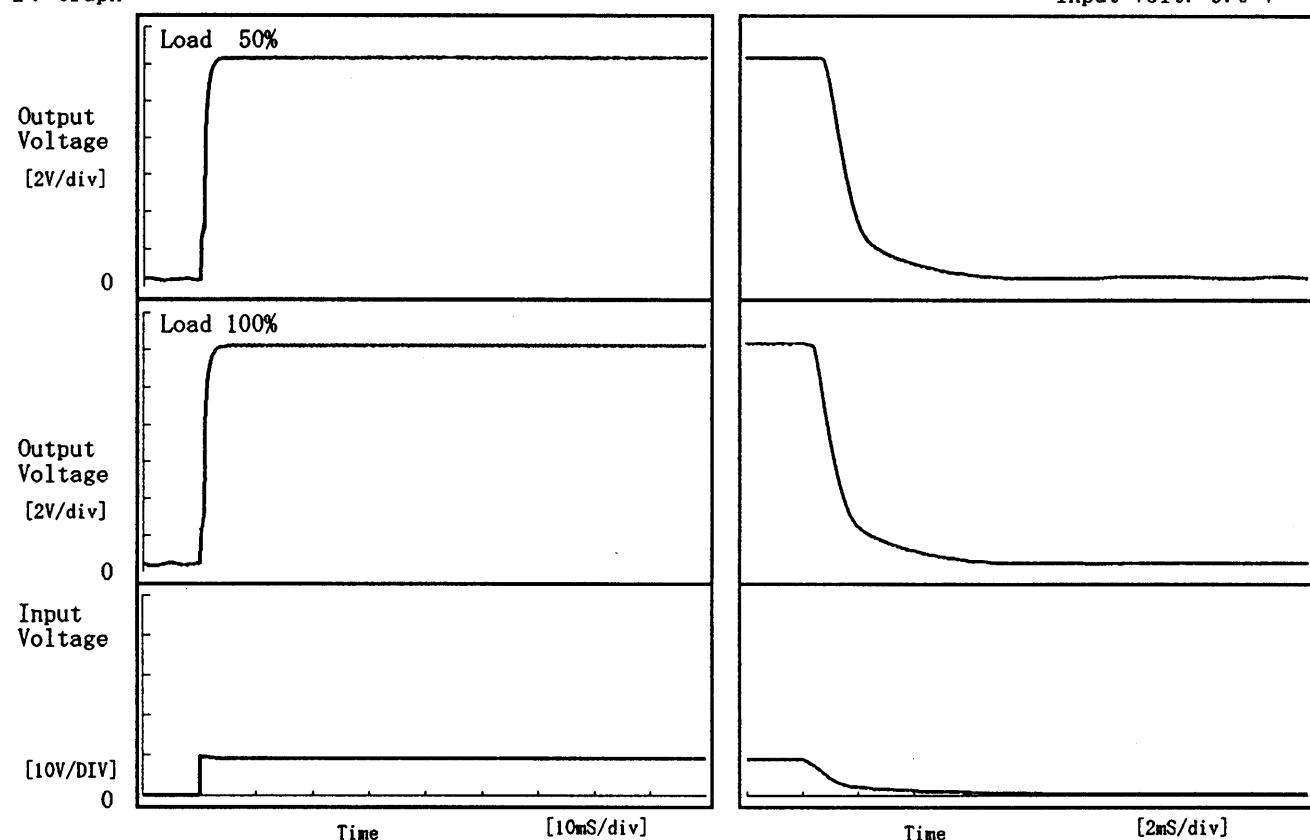

2. Values

| Load | Time | T _d | T _r | T _s | T _h | T _f |
|-------|------|----------------|----------------|----------------|----------------|----------------|
| 50 % | | 0.05 | 1.55 | 1.60 | 0.97 | 2.58 |
| 100 % | | 0.05 | 1.65 | 1.70 | 0.59 | 2.66 |

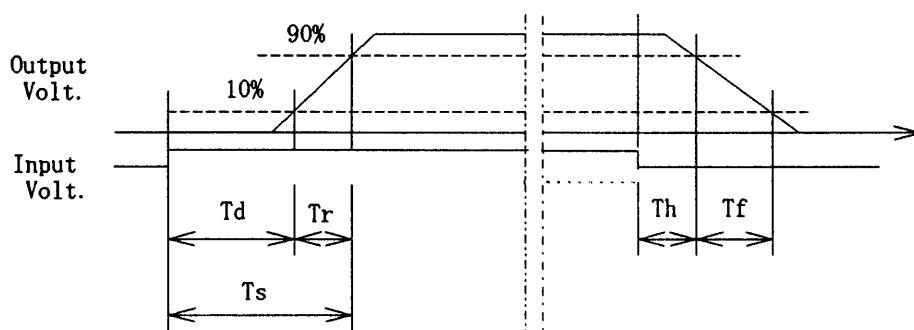


COSEL

| | |
|--------|------------------------------|
| Model | ZUW1R51212 |
| Item | Rise and Fall Time 立上り、立下り時間 |
| Object | -12V 0.065A |


Temperature 25°C
Testing Circuitry Figure A



1. Graph

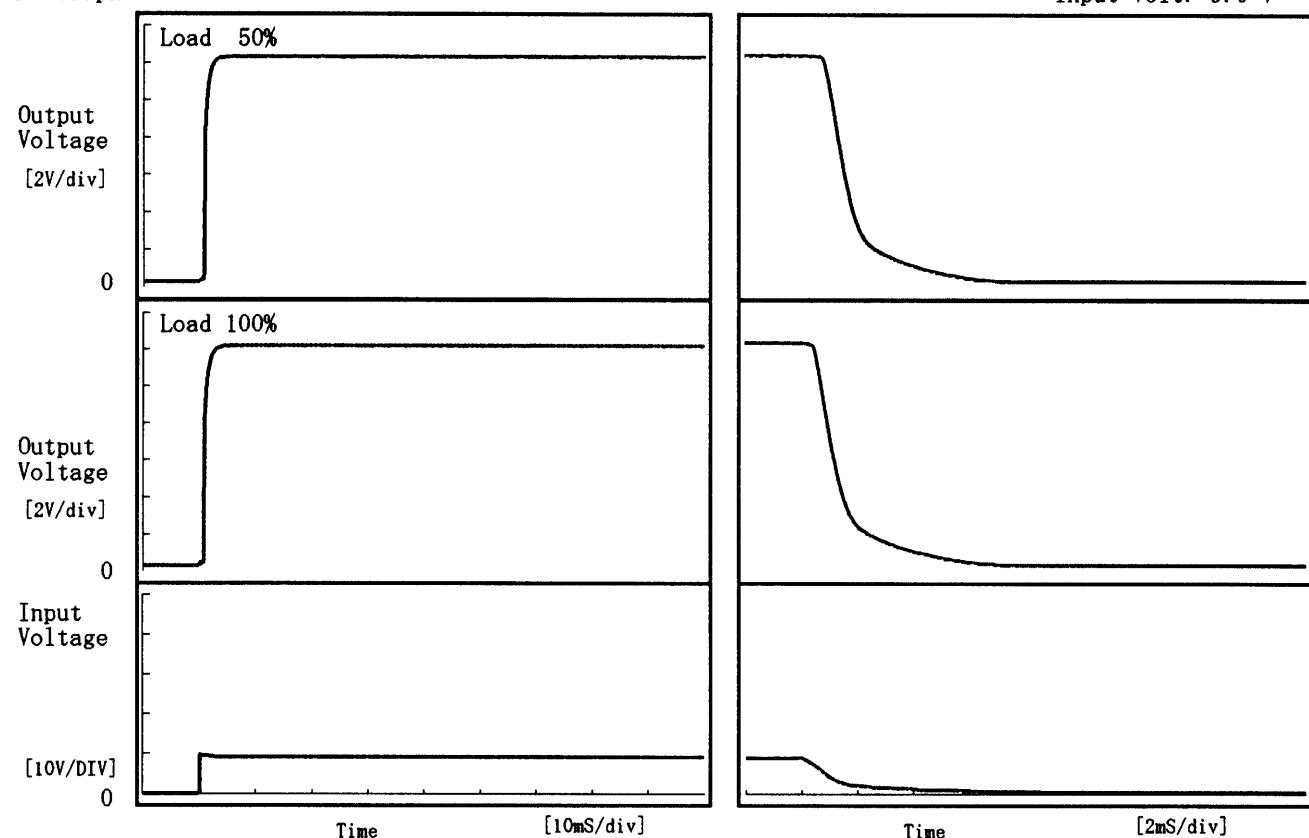

2. Values

| Load | Time | T_d | T_r | T_s | T_h | T_f | [mS] |
|-------|------|-------|-------|-------|-------|-------|------|
| 50 % | | 0.70 | 0.95 | 1.65 | 0.96 | 2.45 | |
| 100 % | | 0.70 | 1.00 | 1.70 | 0.59 | 2.60 | |

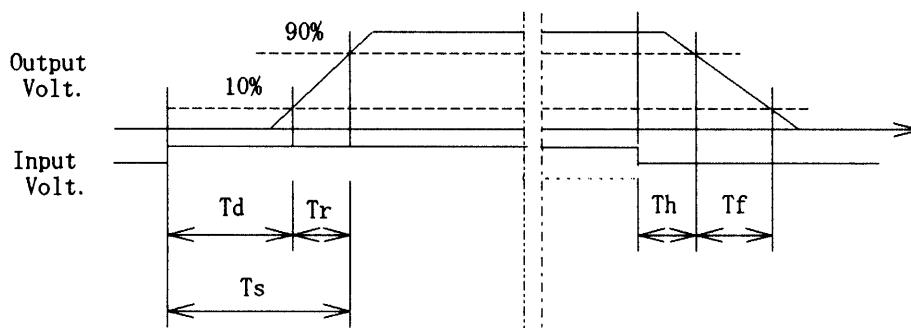

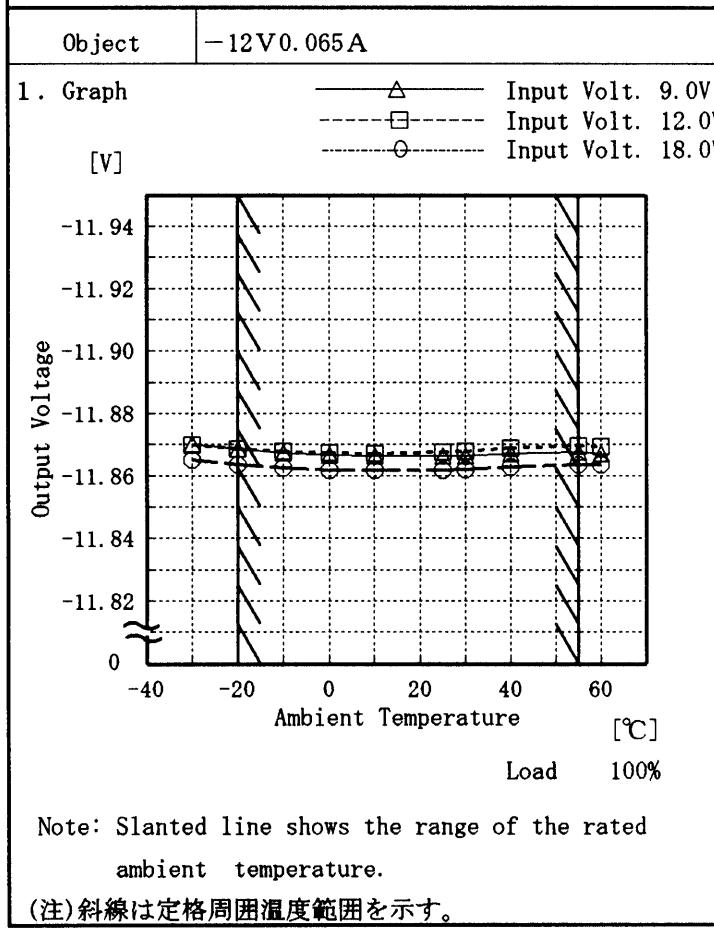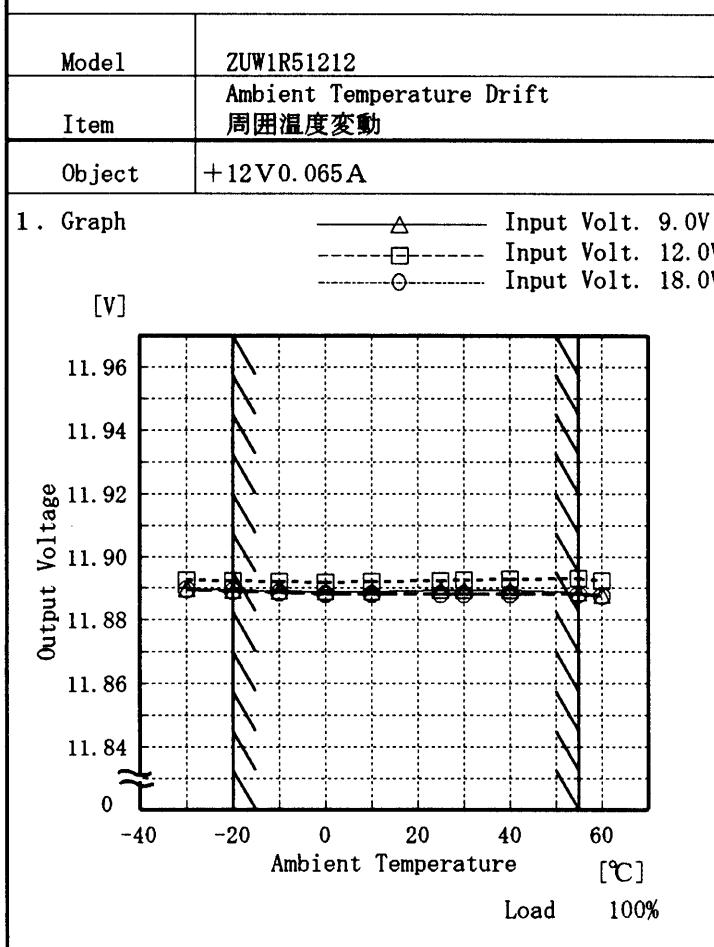COSSEL

Testing Circuitry Figure A


COSEL

Model ZUW1R51212

Item Minimum Input Voltage for Regulated Output Voltage
最低レギュレーション電圧

Object +12V 0.065A

1. Graph

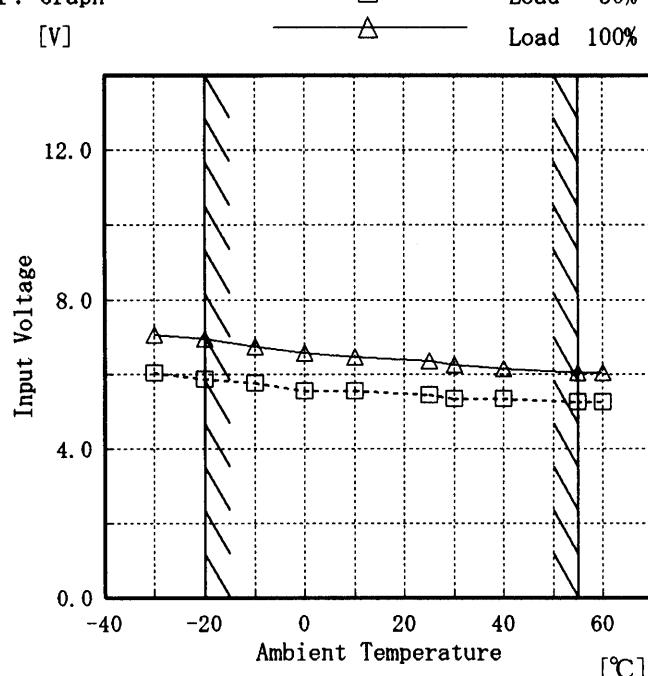


Testing Circuitry Figure A

2. Values

| Ambient Temp. [°C] | Load 50% | Load 100% |
|-----------------------|--------------------|--------------------|
| | Input Volt. [V] | Input Volt. [V] |
| -30 | 6.1 | 7.1 |
| -20 | 5.9 | 7.0 |
| -10 | 5.8 | 6.8 |
| 0 | 5.6 | 6.6 |
| 10 | 5.6 | 6.5 |
| 25 | 5.5 | 6.4 |
| 30 | 5.4 | 6.3 |
| 40 | 5.4 | 6.2 |
| 55 | 5.3 | 6.1 |
| 60 | 5.3 | 6.1 |
| — | — | — |

Object -12V 0.065A

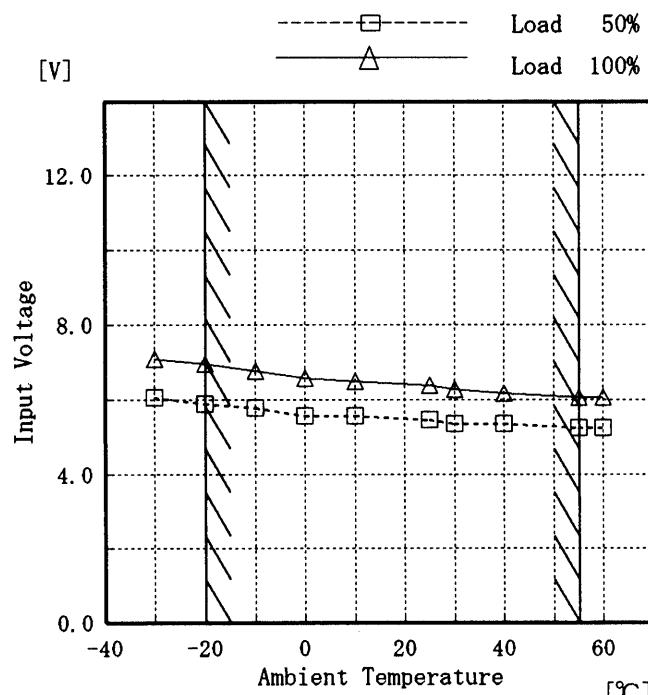

2. Values


| Ambient Temp. [°C] | Load 50% | Load 100% |
|-----------------------|--------------------|--------------------|
| | Input Volt. [V] | Input Volt. [V] |
| -30 | 6.1 | 7.1 |
| -20 | 5.9 | 7.0 |
| -10 | 5.8 | 6.8 |
| 0 | 5.6 | 6.6 |
| 10 | 5.6 | 6.5 |
| 25 | 5.5 | 6.4 |
| 30 | 5.4 | 6.3 |
| 40 | 5.4 | 6.2 |
| 55 | 5.3 | 6.1 |
| 60 | 5.3 | 6.1 |
| — | — | — |

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範用を示す。

COSEL


| | |
|--------|--|
| Model | ZUW1R51212 |
| Item | Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性) |
| Object | +12V 0.065A |

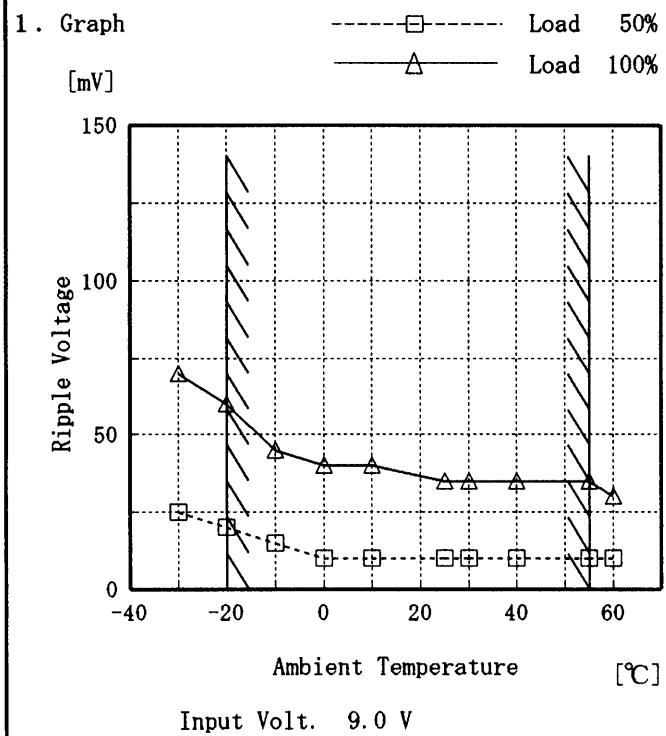

Testing Circuitry Figure A

2. Values

| Ambient Temp. [°C] | Load 50% | Load 100% |
|--------------------|--------------------------|--------------------------|
| | Ripple Output Volt. [mV] | Ripple Output Volt. [mV] |
| -30 | 25 | 70 |
| -20 | 20 | 60 |
| -10 | 15 | 45 |
| 0 | 10 | 40 |
| 10 | 10 | 40 |
| 25 | 10 | 35 |
| 30 | 10 | 35 |
| 40 | 10 | 35 |
| 55 | 10 | 35 |
| 60 | 10 | 30 |
| — | — | — |

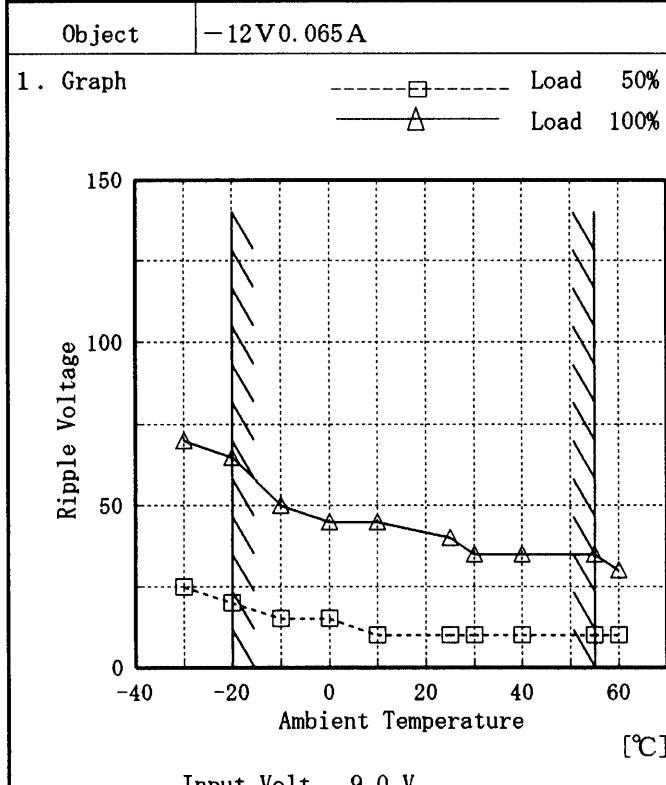

2. Values

| Ambient Temp. [°C] | Load 50% | Load 100% |
|--------------------|--------------------------|--------------------------|
| | Ripple Output Volt. [mV] | Ripple Output Volt. [mV] |
| -30 | 25 | 70 |
| -20 | 20 | 65 |
| -10 | 15 | 50 |
| 0 | 15 | 45 |
| 10 | 10 | 45 |
| 25 | 10 | 40 |
| 30 | 10 | 35 |
| 40 | 10 | 35 |
| 55 | 10 | 35 |
| 60 | 10 | 30 |
| — | — | — |


Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL

| | | | |
|--------|-------------------------|--|-------|
| Model | ZUW1R51212 | Temperature Testing Circuitry Figure A | 25 °C |
| Item | Time Lapse Drift 経時ドリフト | | |
| Object | +12V 0.065A | | |

1. Graph

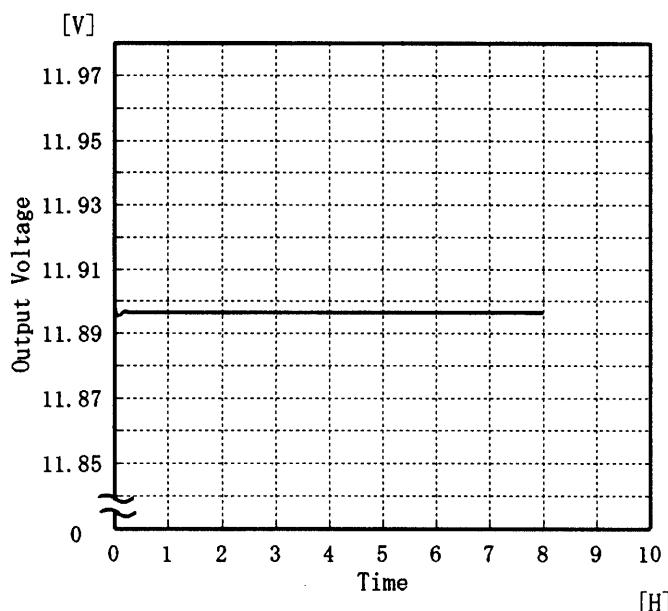


Input Volt. 12.0V
Load 100%

2. Values

| Time since start [H] | Output Voltage [V] |
|----------------------|--------------------|
| 0.0 | 11.899 |
| 0.5 | 11.897 |
| 1.0 | 11.897 |
| 2.0 | 11.897 |
| 3.0 | 11.897 |
| 4.0 | 11.897 |
| 5.0 | 11.897 |
| 6.0 | 11.897 |
| 7.0 | 11.897 |
| 8.0 | 11.897 |

| | |
|--------|-------------|
| Object | -12V 0.065A |
|--------|-------------|

1. Graph

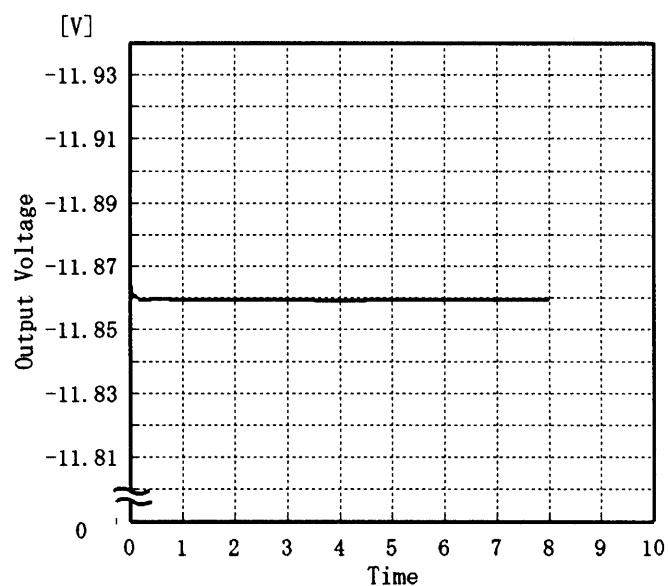

Input Volt. 12.0V
Load 100%

2. Values

| Time since start [H] | Output Voltage [V] |
|----------------------|--------------------|
| 0.0 | -11.865 |
| 0.5 | -11.860 |
| 1.0 | -11.860 |
| 2.0 | -11.859 |
| 3.0 | -11.860 |
| 4.0 | -11.859 |
| 5.0 | -11.860 |
| 6.0 | -11.860 |
| 7.0 | -11.860 |
| 8.0 | -11.860 |



| | | |
|-------|-------------------------------|-------------------------------|
| Model | ZUW1R51212 | Testing Circuitry Figure A |
| Item | Output Voltage Accuracy 定電圧精度 | |

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 9.0~18.0 V

Load Current (AVR 1) : 0.000~0.065 A

(AVR 2) : 0.000~0.065 A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage)/2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 9.0~18.0 V

負荷電流 (AVR 1) 0.000~0.065 A

(AVR 2) 0.000~0.065 A

* 定電圧精度(変動値) = ±(出力電圧の最高値-出力電圧の最低値)/2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

| | | |
|--------|-------------|--|
| Object | +12V 0.065A | |
|--------|-------------|--|

| Item | Temperature [°C] | Input Voltage [V] | Output Current [A] | Output Voltage [V] | Output Voltage Accuracy [mV] | Output Voltage Accuracy(Ration) [%] |
|-----------------|------------------|-------------------|--------------------|--------------------|------------------------------|-------------------------------------|
| Maximum Voltage | 25 | 12.0 | 0.065 | 11.891 | | |
| Minimum Voltage | 55 | 9.0 | 0.000 | 11.634 | ±129 | ±1.1 |

| | | |
|--------|-------------|--|
| Object | -12V 0.065A | |
|--------|-------------|--|

| Item | Temperature [°C] | Input Voltage [V] | Output Current [A] | Output Voltage [V] | Output Voltage Accuracy [mV] | Output Voltage Accuracy(Ration) [%] |
|-----------------|------------------|-------------------|--------------------|--------------------|------------------------------|-------------------------------------|
| Maximum Voltage | 55 | 12.0 | 0.065 | -11.869 | | |
| Minimum Voltage | 55 | 9.0 | 0.000 | -11.603 | ±133 | ±1.2 |



| | | | |
|--------|-------------------|-------------------|----------|
| Model | ZUW1R51212 | | |
| Item | Condensation 結露特性 | Testing Circuitry | Figure A |
| Object | +12V 0.065A | | |

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

| | Times | Output Voltage [V] | Ripple Voltage [mV] | Ripple Noise [mV] |
|------------------|-------|--------------------|---------------------|-------------------|
| Load 50 % | 1 | 11.962 | 15 | 30 |
| | 2 | 11.882 | 15 | 30 |
| | 3 | 11.976 | 15 | 30 |
| Load 100 % | 1 | 11.938 | 30 | 60 |
| | 2 | 11.841 | 30 | 60 |
| | 3 | 11.831 | 30 | 60 |

Input Volt. 12.0 V



| | | | |
|--------|-------------------|-------------------|----------|
| Model | ZUW1R51212 | | |
| Item | Condensation 結露特性 | Testing Circuitry | Figure A |
| Object | -12V 0.065A | | |

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.
- ④ Repeating ①, ② and ③ three times.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を3度行い、異常のないことを確認する。

2. Values

| | Times | Output Voltage [V] | Ripple Voltage [mV] | Ripple Noise [mV] |
|------------------|-------|--------------------|---------------------|-------------------|
| Load 50 % | 1 | -11.842 | 10 | 40 |
| | 2 | -11.878 | 10 | 40 |
| | 3 | -11.846 | 10 | 40 |
| Load 100 % | 1 | -11.820 | 25 | 50 |
| | 2 | -11.841 | 25 | 50 |
| | 3 | -11.864 | 25 | 50 |

Input Volt. 12.0 V

COSEL

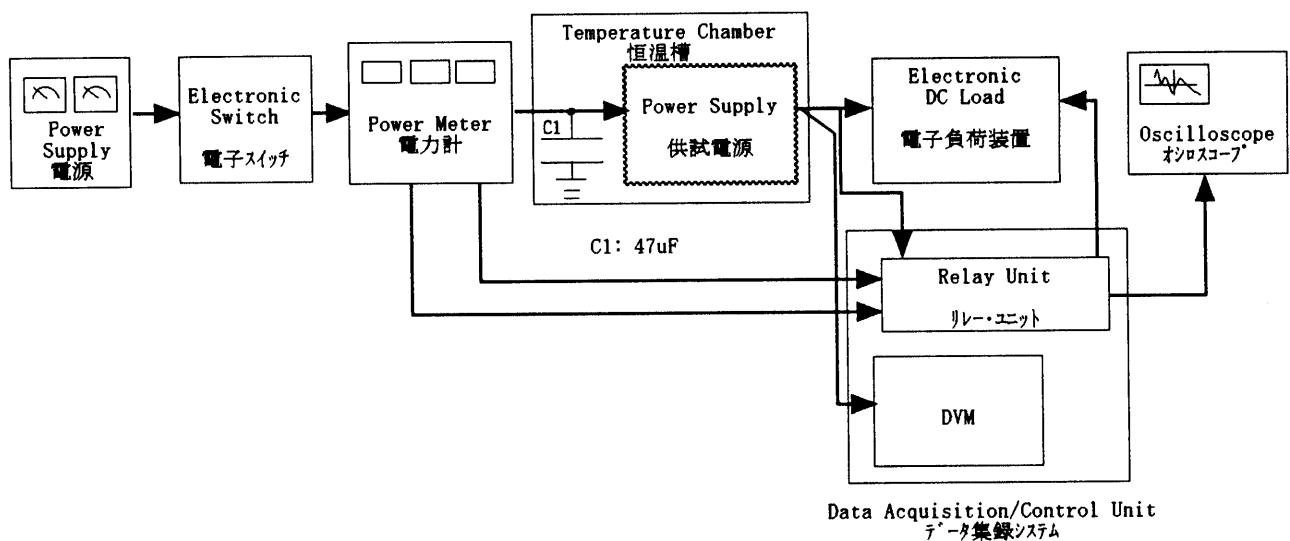


Figure A