



DATA SHEET		Date	14-Jan-21
Model	AEA600F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Tosu

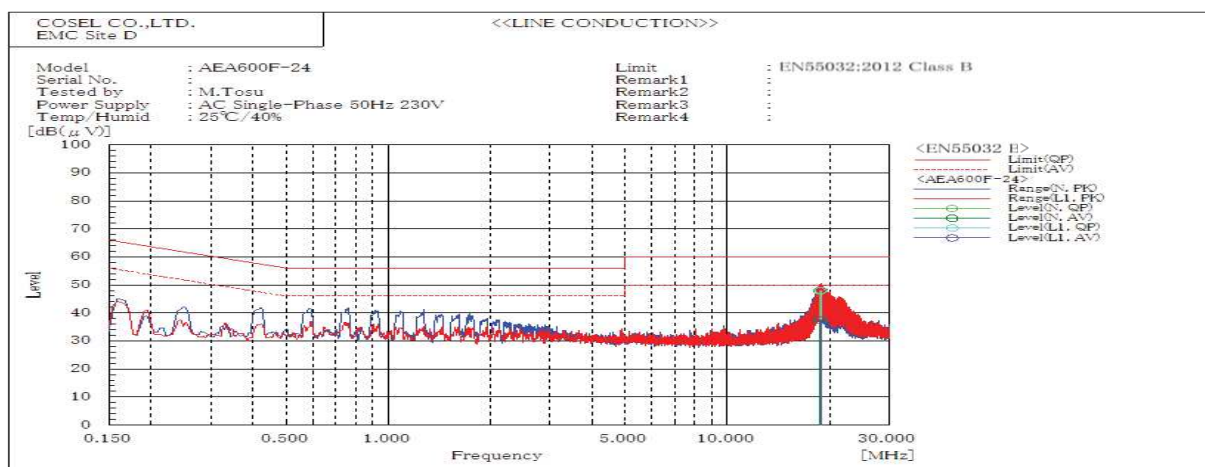


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
18.676	N	47.9	37.6	60	50	12.1	12.4	Pass	
18.869	L1	48	37.5	60	50	12	12.5	Pass	

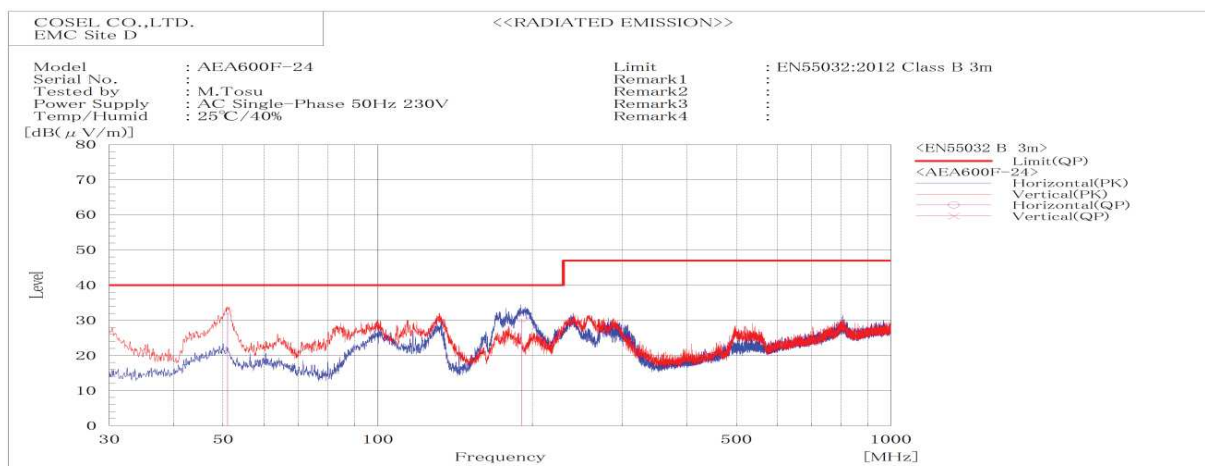


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
190.717	H	Stable	30.5	40	9.5	Pass	199.7	357.1	
50.961	V	Stable	32	40	8	Pass	100.2	330	

DATA SHEET		Date	14-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Tosu

1. Line conduction

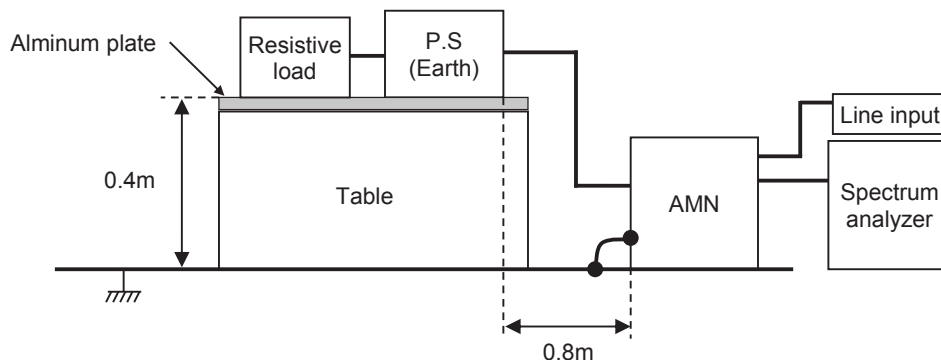

2. Radiated emission

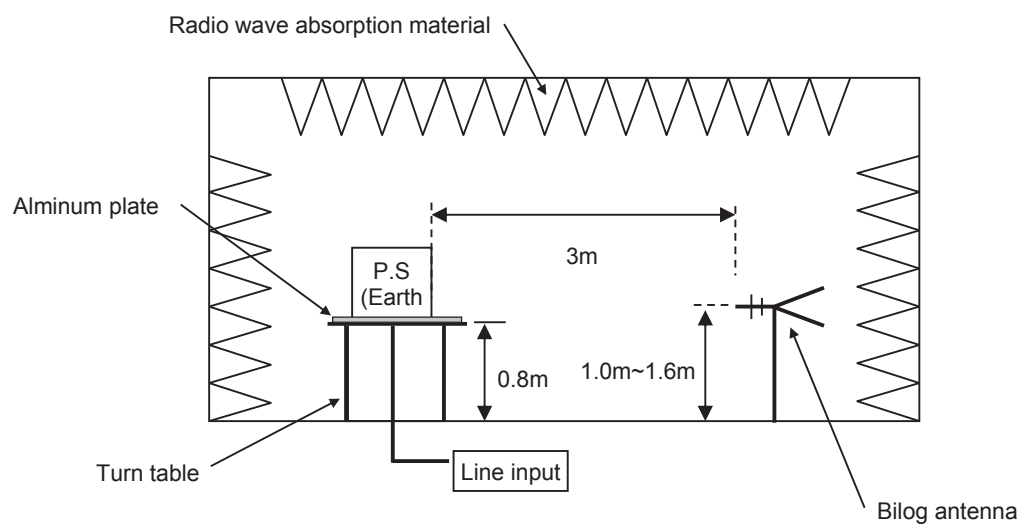


Conditions

Test : EMI

Model Name : AEA600F

○Photographs of Test Set-Up

1.LINE CONDUCTION

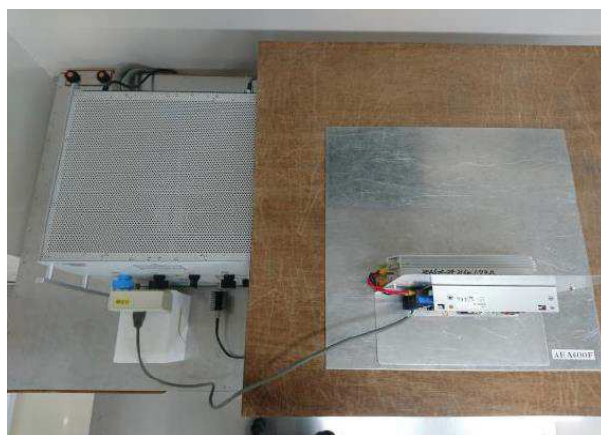

2.RADIATED EMISSION

