



DATA SHEET		Date	07-Jun-22
Model	AEA600F-32	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	42 %RH
		Tested by	S.Takashima

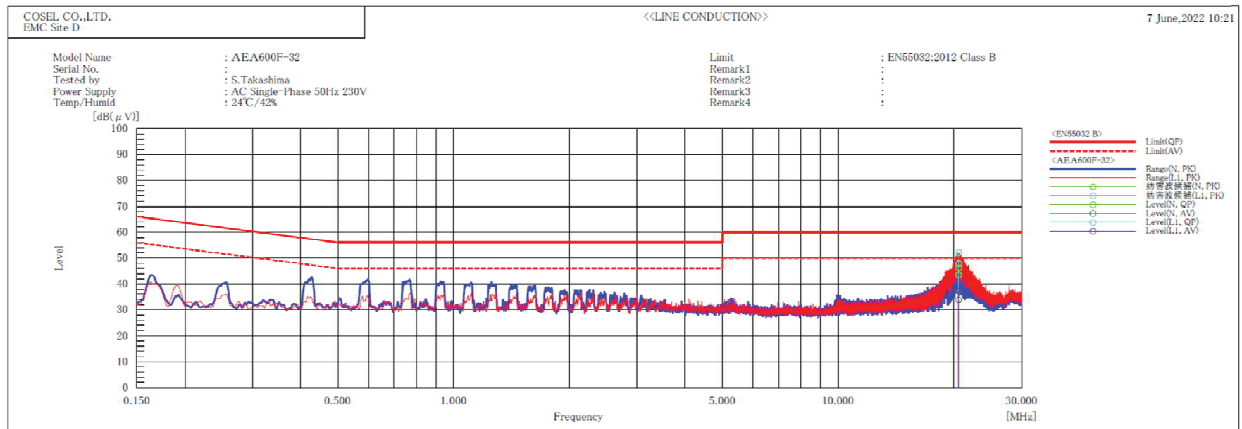


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
20.564	N	43.5	34.0	60	50	16.5	16.0	Pass	
20.572	L1	47.9	37.2	60	50	12.1	12.8	Pass	

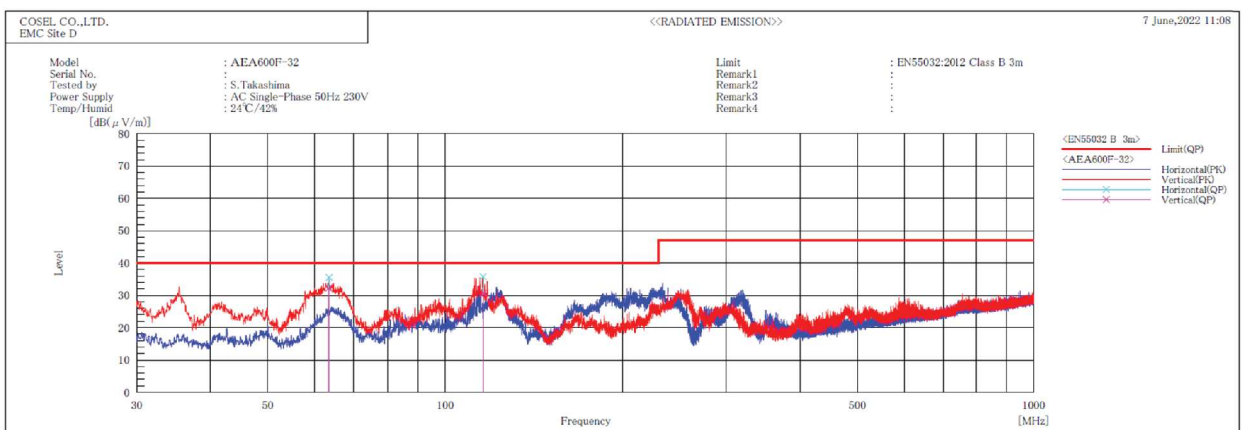


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
63.500	V	Stable	32.3	40	7.7	Pass	101.5	290.8	
116.196	V	Stable	30.8	40	9.2	Pass	100.0	270.8	

DATA SHEET		Date	07-Jun-22
Model	Circuit used for measurement	Temp.	24 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	42 %RH
		Tested by	S.Takashima

### 1. Line conduction

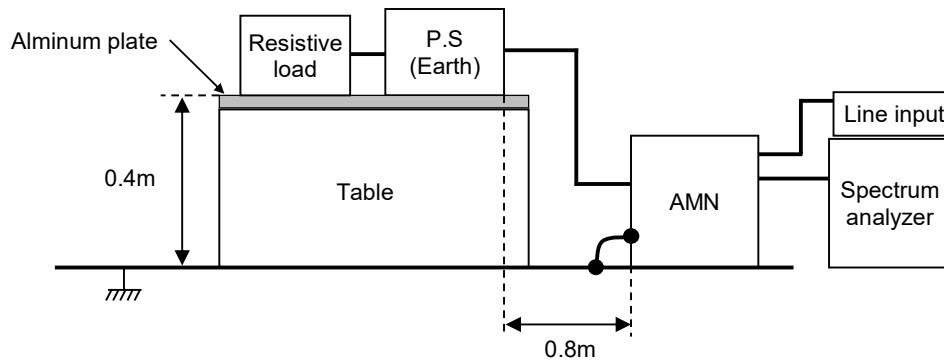

### 2. Radiated emission

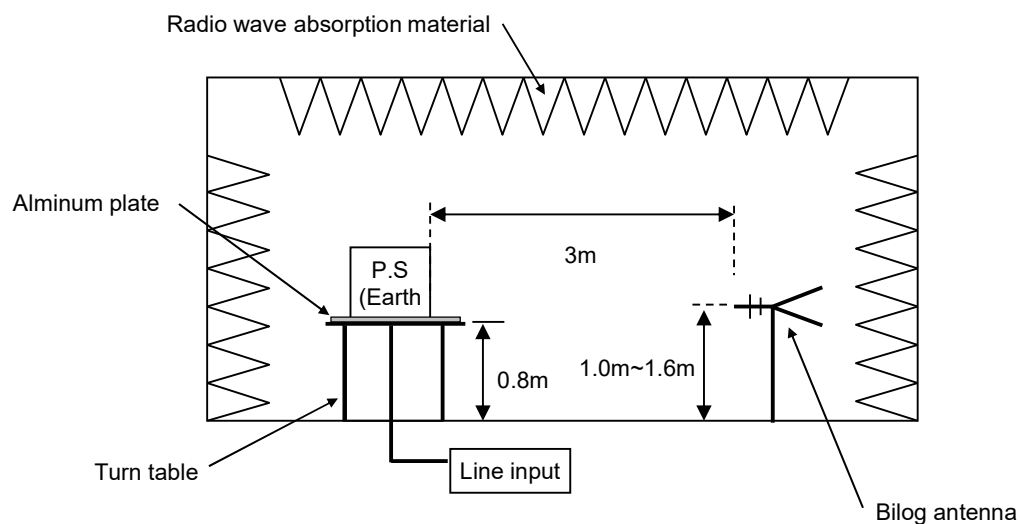


## Conditions

Test : EMI

Model Name : AEA600F

## ○Photographs of Test Set-Up

### 1.LINE CONDUCTION

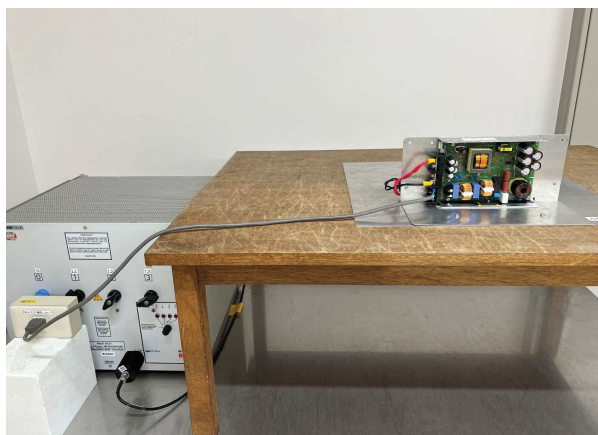

### 2.RADIATED EMISSION

