



TEST DATA OF CBS1004824
(48V INPUT)

Regulated DC Power Supply
Feb. 24, 2001

Approved by : Takayuki Fukuda
Takayuki Fukuda Design Manager

Prepared by : Atsushi Yoshiyama
Atsushi Yoshiyama Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Input Current (by Input Voltage)	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current)	3
入力電流 (負荷特性)	
4. Input Power (by Load Current)	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage)	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current)	6
効率 (負荷特性)	
7. Load Regulation	7
静的負荷変動	
8. Ripple Voltage (by Load Current)	8
リップル電圧 (負荷特性)	
9. Ripple-Noise	9
リップルノイズ	
10. Overcurrent Protection	10
過電流保護	
11. Overvoltage Protection	11
過電圧保護	
12. Dynamic Load Response	12
動的負荷変動	
13. Rise and Fall Time	13
立上り、立下り時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Condensation	19
結露特性	
20. Line Noise Tolerance	20
入力雑音耐量	
21. Figure of Testing Circuitry	21
測定回路図	

(Final Page 21)



<p>Model CBS1004824</p> <p>Item Line Regulation 静の入力変動</p> <p>Object +24V4.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																
<p>1. Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>23.942</td><td>23.942</td></tr> <tr><td>36</td><td>23.942</td><td>23.942</td></tr> <tr><td>40</td><td>23.942</td><td>23.943</td></tr> <tr><td>48</td><td>23.942</td><td>23.943</td></tr> <tr><td>55</td><td>23.942</td><td>23.943</td></tr> <tr><td>60</td><td>23.942</td><td>23.943</td></tr> <tr><td>70</td><td>23.943</td><td>23.944</td></tr> <tr><td>76</td><td>23.943</td><td>23.944</td></tr> <tr><td>80</td><td>23.943</td><td>23.944</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	33	23.942	23.942	36	23.942	23.942	40	23.942	23.943	48	23.942	23.943	55	23.942	23.943	60	23.942	23.943	70	23.943	23.944	76	23.943	23.944	80	23.943	23.944
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
33	23.942	23.942																																
36	23.942	23.942																																
40	23.942	23.943																																
48	23.942	23.943																																
55	23.942	23.943																																
60	23.942	23.943																																
70	23.943	23.944																																
76	23.943	23.944																																
80	23.943	23.944																																



Model CBS1004824		Temperature 25°C																																																																							
Item Input Current (by Input Voltage) 入力電流 (入力電圧特性)		Testing Circuitry Figure A																																																																							
Object																																																																									
<p>1. Graph</p> <p>—△— Load 100% ---□--- Load 50% -○- Load 0%</p> <p>Input Current [A]</p> <p>Input Voltage [V]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>8.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>16.0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>24.0</td><td>0.008</td><td>0.008</td><td>0.008</td></tr> <tr><td>30.6</td><td>0.086</td><td>1.948</td><td>3.822</td></tr> <tr><td>33.0</td><td>0.082</td><td>1.772</td><td>3.492</td></tr> <tr><td>36.0</td><td>0.064</td><td>1.607</td><td>3.166</td></tr> <tr><td>40.0</td><td>0.059</td><td>1.446</td><td>2.838</td></tr> <tr><td>48.0</td><td>0.049</td><td>1.215</td><td>2.368</td></tr> <tr><td>60.0</td><td>0.043</td><td>0.989</td><td>1.912</td></tr> <tr><td>70.0</td><td>0.041</td><td>0.861</td><td>1.653</td></tr> <tr><td>76.0</td><td>0.040</td><td>0.802</td><td>1.533</td></tr> <tr><td>80.0</td><td>0.040</td><td>0.790</td><td>1.463</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	8.0	0.000	0.000	0.000	16.0	0.000	0.000	0.000	24.0	0.008	0.008	0.008	30.6	0.086	1.948	3.822	33.0	0.082	1.772	3.492	36.0	0.064	1.607	3.166	40.0	0.059	1.446	2.838	48.0	0.049	1.215	2.368	60.0	0.043	0.989	1.912	70.0	0.041	0.861	1.653	76.0	0.040	0.802	1.533	80.0	0.040	0.790	1.463	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Input Voltage [V]	Input Current [A]																																																																								
	Load 0%	Load 50%	Load 100%																																																																						
8.0	0.000	0.000	0.000																																																																						
16.0	0.000	0.000	0.000																																																																						
24.0	0.008	0.008	0.008																																																																						
30.6	0.086	1.948	3.822																																																																						
33.0	0.082	1.772	3.492																																																																						
36.0	0.064	1.607	3.166																																																																						
40.0	0.059	1.446	2.838																																																																						
48.0	0.049	1.215	2.368																																																																						
60.0	0.043	0.989	1.912																																																																						
70.0	0.041	0.861	1.653																																																																						
76.0	0.040	0.802	1.533																																																																						
80.0	0.040	0.790	1.463																																																																						
--	--	--	--																																																																						
--	--	--	--																																																																						
--	--	--	--																																																																						
--	--	--	--																																																																						
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																																																									




Model	CBS1004824
Item	Input Current (by Load Current) 入力電流 (負荷特性)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1. Graph

- △— Input Volt. 36V
- - -□- - - Input Volt. 48V
- - -○- - - Input Volt. 76V

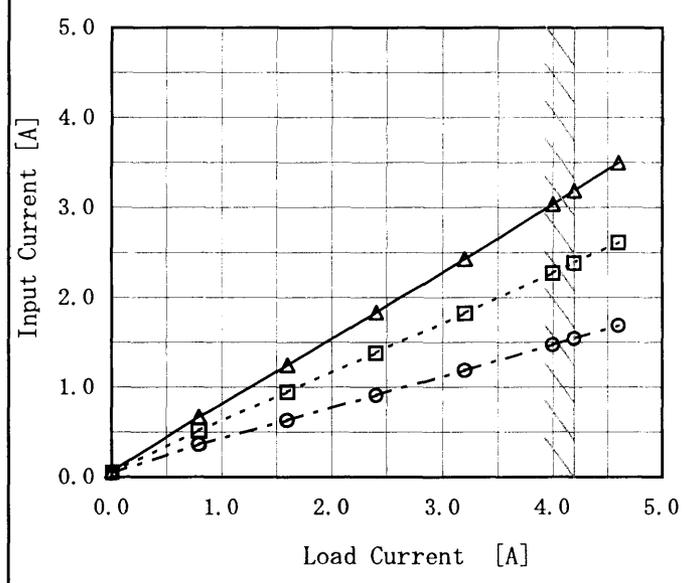

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
0.0	0.064	0.049	0.040
0.8	0.668	0.514	0.358
1.6	1.247	0.945	0.631
2.4	1.834	1.381	0.907
3.2	2.427	1.823	1.186
4.0	3.035	2.270	1.470
4.2	3.187	2.382	1.541
4.6	3.498	2.611	1.684
--	-	-	-
--	-	-	-
--	-	-	-



Model		CBS1004824		Temperature		25°C																																																				
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																				
Object		_____																																																								
1. Graph				2. Values																																																						
<p> \triangle Input Volt. 36V \square Input Volt. 48V \circ Input Volt. 76V </p> <p style="text-align: center;">Load Current [A]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>2.3</td><td>2.4</td><td>3.1</td></tr> <tr><td>0.8</td><td>24.0</td><td>24.7</td><td>27.3</td></tr> <tr><td>1.6</td><td>44.8</td><td>45.4</td><td>48.0</td></tr> <tr><td>2.4</td><td>65.9</td><td>66.1</td><td>69.2</td></tr> <tr><td>3.2</td><td>86.9</td><td>87.3</td><td>90.4</td></tr> <tr><td>4.0</td><td>108.2</td><td>108.5</td><td>111.8</td></tr> <tr><td>4.2</td><td>113.6</td><td>113.9</td><td>117.2</td></tr> <tr><td>4.6</td><td>124.5</td><td>124.6</td><td>128.1</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	2.3	2.4	3.1	0.8	24.0	24.7	27.3	1.6	44.8	45.4	48.0	2.4	65.9	66.1	69.2	3.2	86.9	87.3	90.4	4.0	108.2	108.5	111.8	4.2	113.6	113.9	117.2	4.6	124.5	124.6	128.1	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																									
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																							
0.0	2.3	2.4	3.1																																																							
0.8	24.0	24.7	27.3																																																							
1.6	44.8	45.4	48.0																																																							
2.4	65.9	66.1	69.2																																																							
3.2	86.9	87.3	90.4																																																							
4.0	108.2	108.5	111.8																																																							
4.2	113.6	113.9	117.2																																																							
4.6	124.5	124.6	128.1																																																							
--	-	-	-																																																							
--	-	-	-																																																							
--	-	-	-																																																							
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																										




Model		CBS1004824																																	
Item		Efficiency (by Input Voltage) 効率 (入力電圧特性)																																	
Object		Temperature 25°C Testing Circuitry Figure A																																	
1. Graph		2. Values																																	
<p>---□--- Load 50% —△— Load 100%</p>		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>85.3</td><td>87.0</td></tr> <tr><td>36</td><td>85.9</td><td>87.6</td></tr> <tr><td>40</td><td>86.2</td><td>87.9</td></tr> <tr><td>48</td><td>85.4</td><td>88.0</td></tr> <tr><td>55</td><td>84.8</td><td>87.3</td></tr> <tr><td>60</td><td>83.6</td><td>86.7</td></tr> <tr><td>70</td><td>82.1</td><td>85.8</td></tr> <tr><td>76</td><td>81.1</td><td>85.0</td></tr> <tr><td>80</td><td>80.4</td><td>84.3</td></tr> </tbody> </table>		Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	33	85.3	87.0	36	85.9	87.6	40	86.2	87.9	48	85.4	88.0	55	84.8	87.3	60	83.6	86.7	70	82.1	85.8	76	81.1	85.0	80	80.4	84.3
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
33	85.3	87.0																																	
36	85.9	87.6																																	
40	86.2	87.9																																	
48	85.4	88.0																																	
55	84.8	87.3																																	
60	83.6	86.7																																	
70	82.1	85.8																																	
76	81.1	85.0																																	
80	80.4	84.3																																	
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																			



Model	CBS1004824
Item	Efficiency (by Load Current) 効率 (負荷特性)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- △— Input Volt. 36V
 - - □ - - Input Volt. 48V
 - · ○ · - Input Volt. 76V

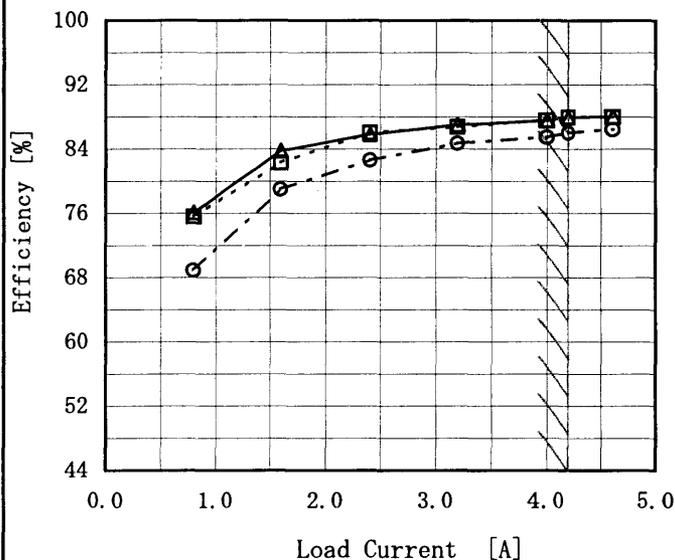

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
0.0	-	-	-
0.8	76.1	75.6	68.9
1.6	83.8	82.3	79.0
2.4	85.9	86.0	82.6
3.2	87.0	86.8	84.7
4.0	87.6	87.6	85.5
4.2	88.0	88.0	86.0
4.6	88.0	88.0	86.5
--	-	-	-
--	-	-	-
--	-	-	-

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。



<p>Model CBS1004824</p> <p>Item Load Regulation 静的負荷変動</p> <p>Object +24V4.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																															
<p>1. Graph</p> <p>—△— Input Volt. 36V</p> <p>---□--- Input Volt. 48V</p> <p>-·-○-·- Input Volt. 76V</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>23.943</td><td>23.943</td><td>23.943</td></tr> <tr><td>0.8</td><td>23.943</td><td>23.943</td><td>23.944</td></tr> <tr><td>1.6</td><td>23.943</td><td>23.943</td><td>23.944</td></tr> <tr><td>2.4</td><td>23.943</td><td>23.944</td><td>23.944</td></tr> <tr><td>3.2</td><td>23.944</td><td>23.944</td><td>23.945</td></tr> <tr><td>4.0</td><td>23.944</td><td>23.944</td><td>23.945</td></tr> <tr><td>4.2</td><td>23.944</td><td>23.944</td><td>23.945</td></tr> <tr><td>4.6</td><td>23.944</td><td>23.944</td><td>23.945</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>---</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	23.943	23.943	23.943	0.8	23.943	23.943	23.944	1.6	23.943	23.943	23.944	2.4	23.943	23.944	23.944	3.2	23.944	23.944	23.945	4.0	23.944	23.944	23.945	4.2	23.944	23.944	23.945	4.6	23.944	23.944	23.945	---	-	-	-	---	-	-	-
Load Current [A]	Output Voltage [V]																																																
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																														
0.0	23.943	23.943	23.943																																														
0.8	23.943	23.943	23.944																																														
1.6	23.943	23.943	23.944																																														
2.4	23.943	23.944	23.944																																														
3.2	23.944	23.944	23.945																																														
4.0	23.944	23.944	23.945																																														
4.2	23.944	23.944	23.945																																														
4.6	23.944	23.944	23.945																																														
---	-	-	-																																														
---	-	-	-																																														



<p>Model CBS1004824</p> <p>Item Ripple Voltage (by Load Current) リップル電圧 (負荷特性)</p> <p>Object +24V4.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																							
<p>1. Graph</p> <p>—△— Input Volt. 36V</p> <p>-○- Input Volt. 76V</p> <p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Output Voltage [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>0.8</td><td>10</td><td>15</td></tr> <tr><td>1.7</td><td>10</td><td>15</td></tr> <tr><td>2.5</td><td>10</td><td>15</td></tr> <tr><td>3.4</td><td>10</td><td>15</td></tr> <tr><td>4.2</td><td>10</td><td>15</td></tr> <tr><td>5.0</td><td>10</td><td>15</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>		Load Current [A]	Ripple Output Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	5	5	0.8	10	15	1.7	10	15	2.5	10	15	3.4	10	15	4.2	10	15	5.0	10	15	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple Output Voltage [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.0	5	5																																							
0.8	10	15																																							
1.7	10	15																																							
2.5	10	15																																							
3.4	10	15																																							
4.2	10	15																																							
5.0	10	15																																							
--	--	--																																							
--	--	--																																							
--	--	--																																							
--	--	--																																							
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形図</p>																																									



<p>Model CBS1004824</p> <p>Item Ripple-Noise リップルノイズ</p> <p>Object +24V4.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																						
<p>1. Graph</p> <p>—△— Input Volt. 36V</p> <p>-○- Input Volt. 76V</p> <p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>Fig. Complex Ripple Noise Wave Form 図 リップルノイズ波形</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15</td><td>30</td></tr> <tr><td>0.8</td><td>25</td><td>50</td></tr> <tr><td>1.7</td><td>25</td><td>55</td></tr> <tr><td>2.5</td><td>30</td><td>55</td></tr> <tr><td>3.4</td><td>30</td><td>60</td></tr> <tr><td>4.2</td><td>30</td><td>60</td></tr> <tr><td>5.1</td><td>30</td><td>60</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	15	30	0.8	25	50	1.7	25	55	2.5	30	55	3.4	30	60	4.2	30	60	5.1	30	60	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 36 [V]	Input Volt. 76 [V]																																						
0.0	15	30																																						
0.8	25	50																																						
1.7	25	55																																						
2.5	30	55																																						
3.4	30	60																																						
4.2	30	60																																						
5.1	30	60																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						




<p>Model CBS1004824</p> <p>Item Overcurrent Protection 過電流保護</p> <p>Object +24V4.2A</p>		<p>Temperature 25°C</p> <p>Testing Circuitry Figure A</p>																																																										
<p>1. Graph</p> <p>— Input Volt. 36V - - - Input Volt. 48V ⋯ Input Volt. 76V</p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。</p> <p>Intermittent operation occurs when the output voltage is from 16.8V to 0V. 16.8V~0V間は、間欠モードとなる。</p>	<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>24.0</td><td>4.30</td><td>4.23</td><td>4.31</td></tr> <tr><td>22.8</td><td>5.67</td><td>5.63</td><td>5.79</td></tr> <tr><td>21.6</td><td>5.68</td><td>5.65</td><td>5.82</td></tr> <tr><td>19.2</td><td>5.68</td><td>5.68</td><td>5.87</td></tr> <tr><td>16.8</td><td>5.67</td><td>5.70</td><td>5.92</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	24.0	4.30	4.23	4.31	22.8	5.67	5.63	5.79	21.6	5.68	5.65	5.82	19.2	5.68	5.68	5.87	16.8	5.67	5.70	5.92	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Output Voltage [V]	Load Current [A]																																																											
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																									
24.0	4.30	4.23	4.31																																																									
22.8	5.67	5.63	5.79																																																									
21.6	5.68	5.65	5.82																																																									
19.2	5.68	5.68	5.87																																																									
16.8	5.67	5.70	5.92																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									
--	--	--	--																																																									



Model	CBS1004824
Item	Overtoltage Protection 過電圧保護
Object	+24V4.2A

Testing Circuitry Figure A

1. Graph
- △— Input Volt. 36V
 - Input Volt. 48V
 - Input Volt. 76V

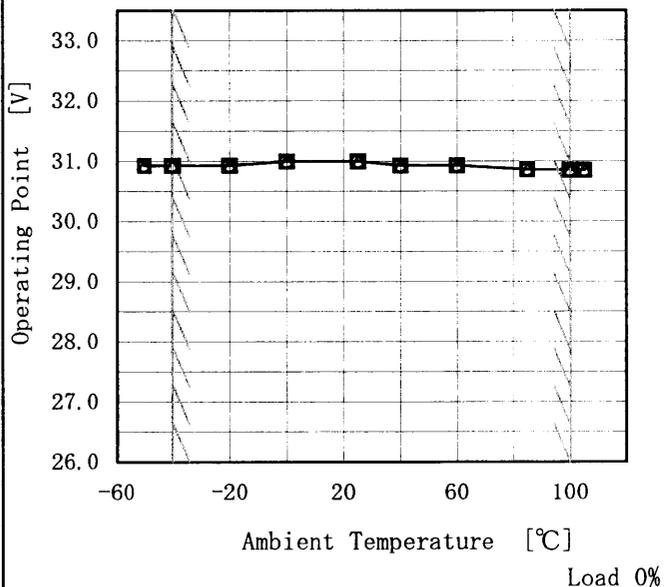

2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-50	30.93	30.93	30.93
-40	30.93	30.93	30.93
-20	30.93	30.93	30.93
0	31.00	31.00	31.00
25	31.00	31.00	31.00
40	30.93	30.93	30.93
60	30.93	30.93	30.93
85	30.86	30.86	30.86
100	30.86	30.85	30.85
105	30.85	30.85	30.85
--	-	-	-


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。





Model	CBS1004824	Temperature	25°C
Item	Dynamic Load Response 動的負荷変動	Testing Circuitry	Figure A
Object	+24V4.2A		



Input Volt. 48 V
Cycle 1000 ms





Min. Load (0A) ←→
Load 100% (4.2A)

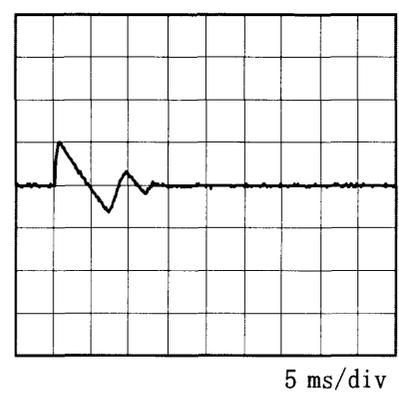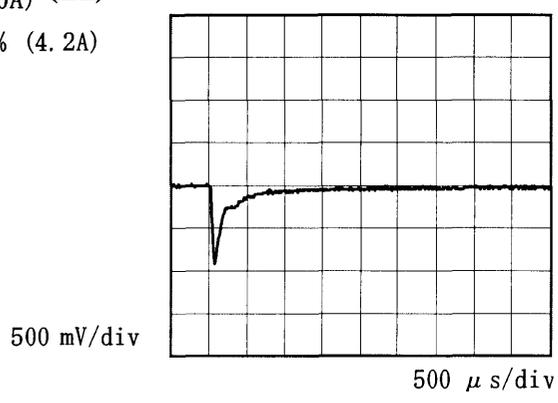

Min. Load (0A) ←→
Load 50% (2.1A)

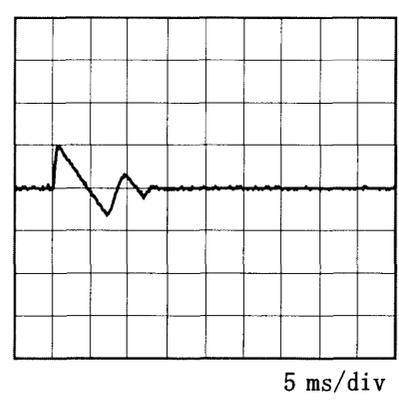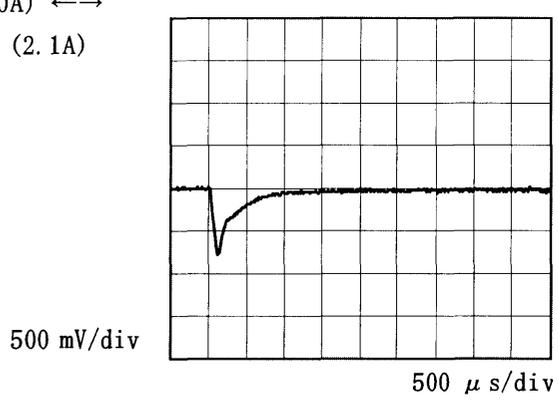

Load 10% (0.42A) ←→
Load 100% (4.2A)

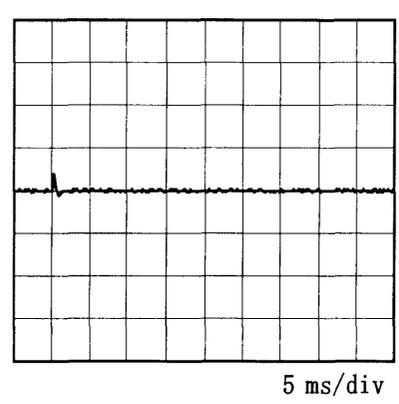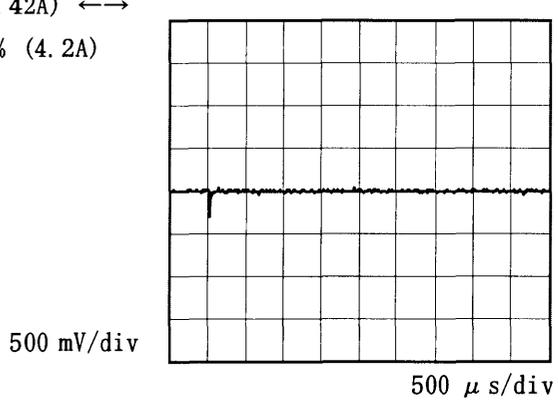




Model	CBS1004824	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+24V4.2A		

1. Graph


Input Volt. 36 V

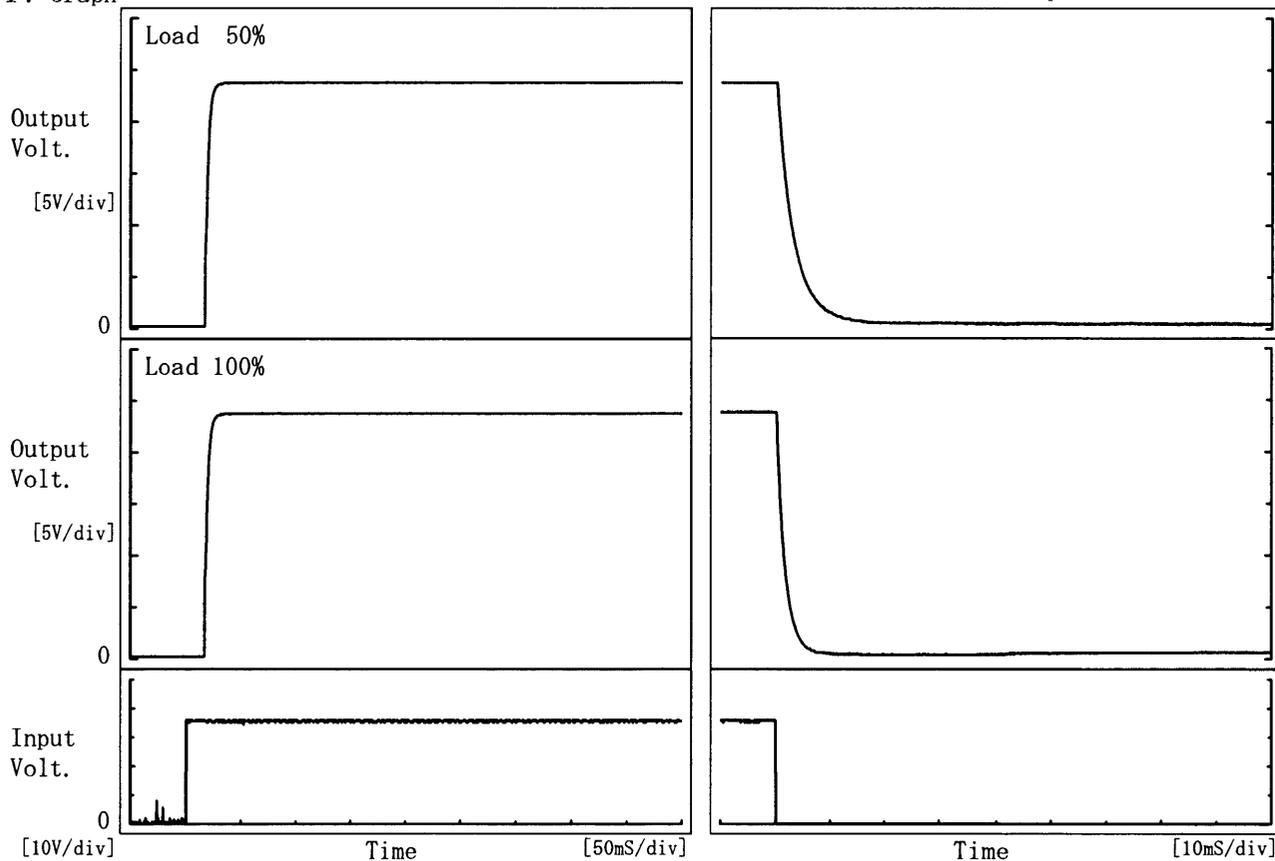

2. Values

[mS]

Load \ Time	T _d	T _r	T _s	T _h	T _f
50 %	16.5	6.3	22.8	0.4	7.3
100 %	16.3	6.3	22.5	0.2	3.7

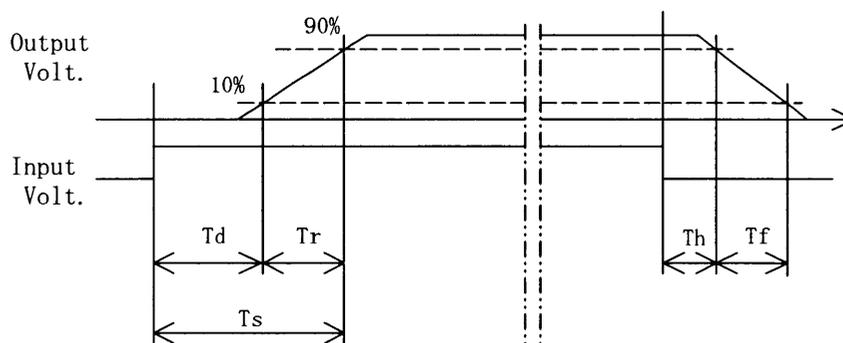




Model	CBS1004824
Item	Ambient Temperature Drift 周囲温度変動
Object	+24V4.2A

Testing Circuitry Figure A

1. Graph

—△— Input Volt. 36V
 ---□--- Input Volt. 48V
 -·-○-·- Input Volt. 76V

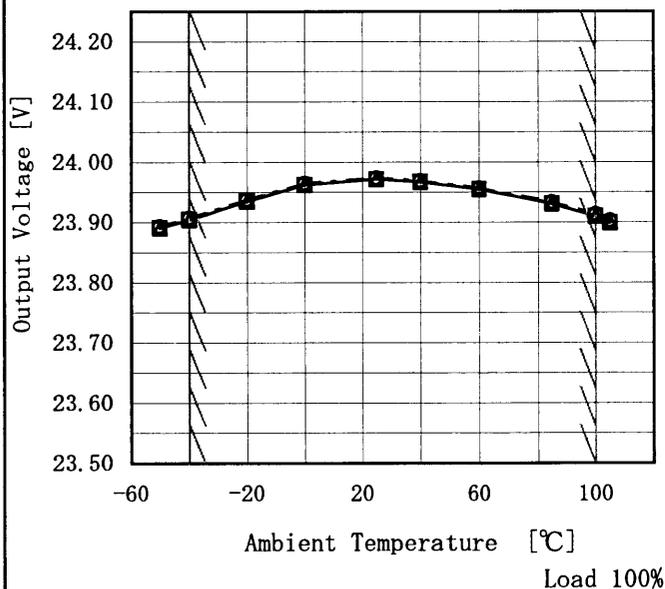

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-50	23.891	23.892	23.893
-40	23.904	23.906	23.907
-20	23.935	23.936	23.938
0	23.963	23.963	23.964
25	23.972	23.972	23.973
40	23.967	23.968	23.969
60	23.955	23.955	23.957
85	23.931	23.931	23.933
100	23.910	23.911	23.913
105	23.899	23.900	23.903
--	-	-	-



COSEL																																								
Model	CBS1004824																																							
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	Testing Circuitry Figure A																																						
Object	+24V4.2A																																							
<p>1. Graph</p> <p style="text-align: right;"> ---□--- Load 50% —△— Load 100% </p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Input Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-50</td><td>28.1</td><td>28.1</td></tr> <tr><td>-40</td><td>28.1</td><td>28.0</td></tr> <tr><td>-20</td><td>28.1</td><td>28.1</td></tr> <tr><td>0</td><td>28.1</td><td>28.0</td></tr> <tr><td>25</td><td>28.1</td><td>28.0</td></tr> <tr><td>40</td><td>27.9</td><td>28.0</td></tr> <tr><td>60</td><td>27.9</td><td>27.8</td></tr> <tr><td>85</td><td>27.7</td><td>27.6</td></tr> <tr><td>100</td><td>27.5</td><td>27.4</td></tr> <tr><td>105</td><td>27.5</td><td>27.4</td></tr> <tr><td>--</td><td>-</td><td>-</td></tr> </tbody> </table>	Ambient Temperature [°C]	Input Voltage [V]		Load 50%	Load 100%	-50	28.1	28.1	-40	28.1	28.0	-20	28.1	28.1	0	28.1	28.0	25	28.1	28.0	40	27.9	28.0	60	27.9	27.8	85	27.7	27.6	100	27.5	27.4	105	27.5	27.4	--	-	-
Ambient Temperature [°C]	Input Voltage [V]																																							
	Load 50%	Load 100%																																						
-50	28.1	28.1																																						
-40	28.1	28.0																																						
-20	28.1	28.1																																						
0	28.1	28.0																																						
25	28.1	28.0																																						
40	27.9	28.0																																						
60	27.9	27.8																																						
85	27.7	27.6																																						
100	27.5	27.4																																						
105	27.5	27.4																																						
--	-	-																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																								



COSEL																																								
Model	CBS1004824																																							
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)	Testing Circuitry Figure A																																						
Object	+24V4.2A																																							
<p>1. Graph</p> <div style="text-align: right;"> <p>---□--- Load 50%</p> <p>—△— Load 100%</p> </div> <p style="text-align: center;">Ambient Temperature [°C]</p> <p style="text-align: center;">Input Volt. 48V</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>-50</td><td>20</td><td>20</td></tr> <tr><td>-40</td><td>20</td><td>20</td></tr> <tr><td>-20</td><td>15</td><td>15</td></tr> <tr><td>0</td><td>15</td><td>15</td></tr> <tr><td>25</td><td>10</td><td>10</td></tr> <tr><td>40</td><td>15</td><td>15</td></tr> <tr><td>60</td><td>15</td><td>15</td></tr> <tr><td>85</td><td>15</td><td>15</td></tr> <tr><td>100</td><td>15</td><td>15</td></tr> <tr><td>105</td><td>15</td><td>15</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temperature [°C]	Ripple Voltage [mV]		Load 50%	Load 100%	-50	20	20	-40	20	20	-20	15	15	0	15	15	25	10	10	40	15	15	60	15	15	85	15	15	100	15	15	105	15	15	—	—	—
Ambient Temperature [°C]	Ripple Voltage [mV]																																							
	Load 50%	Load 100%																																						
-50	20	20																																						
-40	20	20																																						
-20	15	15																																						
0	15	15																																						
25	10	10																																						
40	15	15																																						
60	15	15																																						
85	15	15																																						
100	15	15																																						
105	15	15																																						
—	—	—																																						
<p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>																																								



COSEL																									
Model	CBS1004824	Temperature	25°C																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+24V4.2A																								
1. Graph		2. Values																							
<p style="text-align: center;">Time [H]</p> <p>Input Volt. 48V Load 100%</p>		<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>23.949</td></tr> <tr><td>0.5</td><td>23.947</td></tr> <tr><td>1.0</td><td>23.948</td></tr> <tr><td>2.0</td><td>23.949</td></tr> <tr><td>3.0</td><td>23.949</td></tr> <tr><td>4.0</td><td>23.950</td></tr> <tr><td>5.0</td><td>23.950</td></tr> <tr><td>6.0</td><td>23.950</td></tr> <tr><td>7.0</td><td>23.950</td></tr> <tr><td>8.0</td><td>23.950</td></tr> </tbody> </table>		Time since start [H]	Output Voltage [V]	0.0	23.949	0.5	23.947	1.0	23.948	2.0	23.949	3.0	23.949	4.0	23.950	5.0	23.950	6.0	23.950	7.0	23.950	8.0	23.950
Time since start [H]	Output Voltage [V]																								
0.0	23.949																								
0.5	23.947																								
1.0	23.948																								
2.0	23.949																								
3.0	23.949																								
4.0	23.950																								
5.0	23.950																								
6.0	23.950																								
7.0	23.950																								
8.0	23.950																								



Model		CBS1004824	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		+24V4.2A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 36 ~ 76V

Load Current : 0 ~ 4.2A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 36 ~ 76V

負荷電流 : 0 ~ 4.2A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	76	4.2	23.970	±36	±0.2
Minimum Voltage	100	76	0	23.899		

COSEL

		Testing Circuitry Figure A
Model	CBS1004824	
Item	Condense 結露特性	
Object	+24V4.2A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で -10°C に冷却しておき、約1時間後に恒温槽から取り出し、室温 25°C 、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	23.993	Input Volt. :48V, Load Current. :4.2A
Line Regulation [mV]	1	Input Volt. :36~76V, Load Current. :4.2A
Load Regulation [mV]	3	Input Volt. :48V, Load Current. :0~4.2A



Model		CBS1004824	Temperature 25°C Testing Circuitry Figure B
Item		Line Noise Tolerance 入力雑音耐量	
Object		+24V4.2A	

1. Conditions

- Input Voltage : 48 V
- Pulse Voltage : 2000 V
- Pulse Cycle : 16.7 ms
- Pulse Input Duration : 1 min. or more
- Load : 100 %

2. Results

Pulse Width [ns]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
	POLARITY		保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

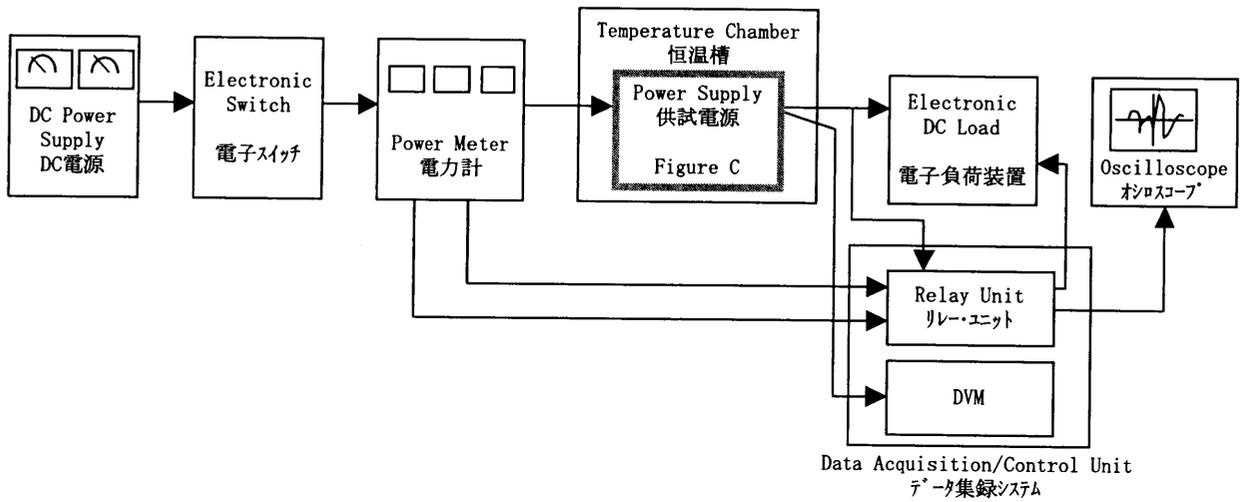


Figure A

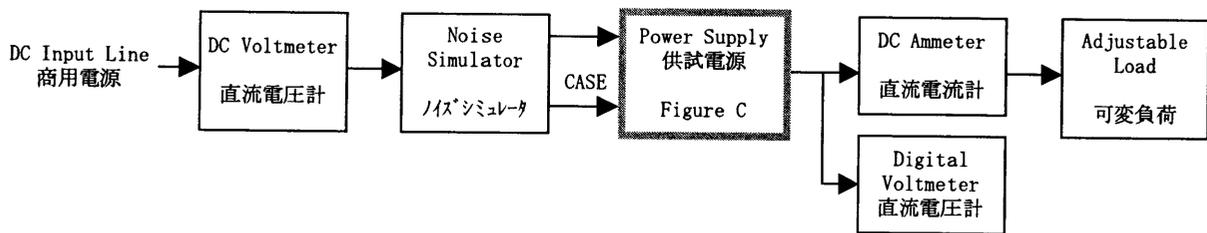


Figure B

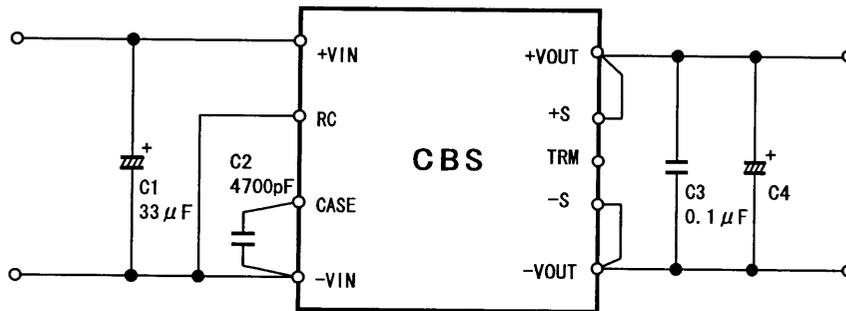


Figure C

- C1 : 100V 33 μ F
- C2 : 4700pF
- C3 : 50V 0.1 μ F

($-40^{\circ}\text{C} \leq T_B \leq -20^{\circ}\text{C}$)

- C4 : CBS2004803, 05 10V 2200 μ F \times 2
- CBS2004812, 15 35V 470 μ F \times 2
- CBS2004824, 28 35V 220 μ F \times 2

($-20^{\circ}\text{C} < T_B \leq 100^{\circ}\text{C}$)

- C4 : CBS2004803, 05 10V 2200 μ F
- CBS2004812, 15 35V 470 μ F
- CBS2004824, 28 35V 220 μ F

T_B : Base Plate Temp.