

TEST DATA OF CBS2002412

(24V INPUT)

Regulated DC Power Supply
Apr. 9, 2002

Approved by : Isao Yasuda
Isao Yasuda Design Manager

Prepared by : Tomoaki Oiwake
Tomoaki Oiwake Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1.	Line Regulation	1
	静的入力変動	
2.	Input Current (by Input Voltage)	2
	入力電流 (入力電圧特性)	
3.	Input Current (by Load Current)	3
	入力電流 (負荷特性)	
4.	Input Power (by Load Current)	4
	入力電力 (負荷特性)	
5.	Efficiency (by Input Voltage)	5
	効率 (入力電圧特性)	
6.	Efficiency (by Load Current)	6
	効率 (負荷特性)	
7.	Load Regulation	7
	静的負荷変動	
8.	Ripple Voltage (by Load Current)	8
	リップル電圧 (負荷特性)	
9.	Ripple-Noise	9
	リップルノイズ	
10.	Overcurrent Protection	10
	過電流保護	
11.	Overvoltage Protection	11
	過電圧保護	
12.	Dynamic Load Response	12
	動的負荷変動	
13.	Rise and Fall Time	13
	立上り、立下り時間	
14.	Ambient Temperature Drift	14
	周囲温度変動	
15.	Minimum Input Voltage for Regulated Output Voltage	15
	最低レギュレーション電圧	
16.	Ripple Voltage (by Ambient Temperature)	16
	リップル電圧 (周囲温度特性)	
17.	Time Lapse Drift	17
	経時ドリフト	
18.	Output Voltage Accuracy	18
	定電圧精度	
19.	Condensation	19
	結露特性	
20.	Line Noise Tolerance	20
	入力雑音耐量	
21.	Figure of Testing Circuitry	21
	測定回路図	


(Final Page 21)



Model	CBS2002412
Item	Line Regulation 静的入力変動
Object	+12V16.7A

Temperature	25°C
Testing Circuitry	Figure A

1. Graph

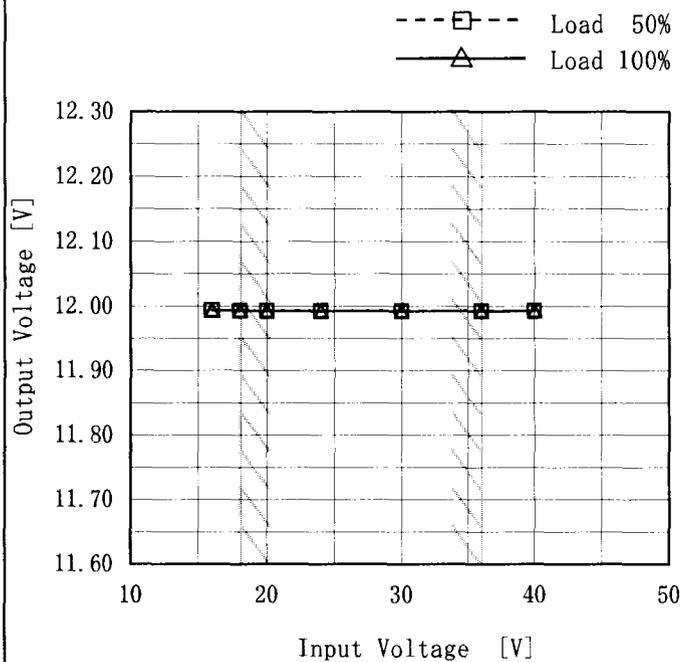

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
16	11.993	11.993
18	11.993	11.993
20	11.993	11.993
24	11.993	11.993
30	11.993	11.992
36	11.993	11.992
40	11.993	11.992
--	--	--
--	--	--

Model		CBS2002412		Temperature		25°C																																																																								
Item		Input Current (by Input Voltage) 入力電流 (入力電圧特性)		Testing Circuitry		Figure A																																																																								
Object																																																																														
1. Graph				2. Values																																																																										
<p>Legend: —△— Load 100% - - - □ - - - Load 50% - · - ○ - · - - Load 0%</p>				<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.001</td><td>0.001</td><td>0.001</td></tr> <tr><td>8.0</td><td>0.020</td><td>0.021</td><td>0.020</td></tr> <tr><td>12.0</td><td>0.017</td><td>0.016</td><td>0.017</td></tr> <tr><td>15.2</td><td>0.182</td><td>7.505</td><td>15.907</td></tr> <tr><td>16.0</td><td>0.174</td><td>7.094</td><td>15.090</td></tr> <tr><td>18.0</td><td>0.159</td><td>6.264</td><td>13.187</td></tr> <tr><td>20.0</td><td>0.146</td><td>5.621</td><td>11.738</td></tr> <tr><td>24.0</td><td>0.122</td><td>4.670</td><td>9.650</td></tr> <tr><td>28.0</td><td>0.097</td><td>4.015</td><td>8.229</td></tr> <tr><td>32.0</td><td>0.089</td><td>3.520</td><td>7.171</td></tr> <tr><td>36.0</td><td>0.086</td><td>3.140</td><td>6.365</td></tr> <tr><td>40.0</td><td>0.078</td><td>2.844</td><td>5.733</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	4.0	0.001	0.001	0.001	8.0	0.020	0.021	0.020	12.0	0.017	0.016	0.017	15.2	0.182	7.505	15.907	16.0	0.174	7.094	15.090	18.0	0.159	6.264	13.187	20.0	0.146	5.621	11.738	24.0	0.122	4.670	9.650	28.0	0.097	4.015	8.229	32.0	0.089	3.520	7.171	36.0	0.086	3.140	6.365	40.0	0.078	2.844	5.733	--	--	--	--	--	--	--	--	--	--	--	--
Input Voltage [V]	Input Current [A]																																																																													
	Load 0%	Load 50%	Load 100%																																																																											
0	0.000	0.000	0.000																																																																											
4.0	0.001	0.001	0.001																																																																											
8.0	0.020	0.021	0.020																																																																											
12.0	0.017	0.016	0.017																																																																											
15.2	0.182	7.505	15.907																																																																											
16.0	0.174	7.094	15.090																																																																											
18.0	0.159	6.264	13.187																																																																											
20.0	0.146	5.621	11.738																																																																											
24.0	0.122	4.670	9.650																																																																											
28.0	0.097	4.015	8.229																																																																											
32.0	0.089	3.520	7.171																																																																											
36.0	0.086	3.140	6.365																																																																											
40.0	0.078	2.844	5.733																																																																											
--	--	--	--																																																																											
--	--	--	--																																																																											
--	--	--	--																																																																											
<p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注) 斜線は定格入力電圧範囲を示す。</p>																																																																														

Model		CBS2002412		Temperature		25°C																																																				
Item		Input Current (by Load Current) 入力電流 (負荷特性)		Testing Circuitry		Figure A																																																				
Object		_____																																																								
1. Graph				2. Values																																																						
<p> </p> <p> </p>				<p> Input Volt. 18V Input Volt. 24V Input Volt. 36V </p>																																																						
<p>The graph plots Input Current [A] on the y-axis (0.0 to 20.0) against Load Current [A] on the x-axis (0 to 20). Three data series are shown: 18V (solid line with triangles), 24V (dashed line with squares), and 36V (dash-dot line with circles). A vertical slanted line is drawn at approximately 16.7A on the x-axis, indicating the rated load current range.</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.158</td><td>0.123</td><td>0.088</td></tr> <tr><td>3.00</td><td>2.303</td><td>1.739</td><td>1.213</td></tr> <tr><td>6.00</td><td>4.471</td><td>3.349</td><td>2.286</td></tr> <tr><td>9.00</td><td>6.628</td><td>5.022</td><td>3.388</td></tr> <tr><td>12.00</td><td>8.981</td><td>6.705</td><td>4.476</td></tr> <tr><td>15.00</td><td>11.256</td><td>8.501</td><td>5.641</td></tr> <tr><td>16.70</td><td>12.705</td><td>9.551</td><td>6.318</td></tr> <tr><td>18.37</td><td>14.164</td><td>10.490</td><td>6.998</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.158	0.123	0.088	3.00	2.303	1.739	1.213	6.00	4.471	3.349	2.286	9.00	6.628	5.022	3.388	12.00	8.981	6.705	4.476	15.00	11.256	8.501	5.641	16.70	12.705	9.551	6.318	18.37	14.164	10.490	6.998	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Input Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
0.00	0.158	0.123	0.088																																																							
3.00	2.303	1.739	1.213																																																							
6.00	4.471	3.349	2.286																																																							
9.00	6.628	5.022	3.388																																																							
12.00	8.981	6.705	4.476																																																							
15.00	11.256	8.501	5.641																																																							
16.70	12.705	9.551	6.318																																																							
18.37	14.164	10.490	6.998																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																										




Model		CBS2002412		Temperature		25°C																																																				
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																				
Object		_____																																																								
1. Graph				2. Values																																																						
<p> \triangle Input Volt. 18V \square Input Volt. 24V \circ Input Volt. 36V </p> <p style="text-align: center;">Input Power [W]</p> <p style="text-align: center;">Load Current [A]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>2.9</td><td>3.0</td><td>3.2</td></tr> <tr><td>3.00</td><td>41.4</td><td>41.9</td><td>43.6</td></tr> <tr><td>6.00</td><td>79.9</td><td>80.3</td><td>82.0</td></tr> <tr><td>9.00</td><td>119.6</td><td>119.9</td><td>121.4</td></tr> <tr><td>12.00</td><td>160.8</td><td>160.8</td><td>161.9</td></tr> <tr><td>15.00</td><td>203.5</td><td>203.0</td><td>203.7</td></tr> <tr><td>16.70</td><td>228.7</td><td>227.4</td><td>227.9</td></tr> <tr><td>18.37</td><td>253.7</td><td>252.1</td><td>252.1</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	2.9	3.0	3.2	3.00	41.4	41.9	43.6	6.00	79.9	80.3	82.0	9.00	119.6	119.9	121.4	12.00	160.8	160.8	161.9	15.00	203.5	203.0	203.7	16.70	228.7	227.4	227.9	18.37	253.7	252.1	252.1	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Input Power [W]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
0.00	2.9	3.0	3.2																																																							
3.00	41.4	41.9	43.6																																																							
6.00	79.9	80.3	82.0																																																							
9.00	119.6	119.9	121.4																																																							
12.00	160.8	160.8	161.9																																																							
15.00	203.5	203.0	203.7																																																							
16.70	228.7	227.4	227.9																																																							
18.37	253.7	252.1	252.1																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																										



Model	CBS2002412
Item	Efficiency (by Input Voltage) 効率 (入力電圧特性)
Object	_____

Temperature	25°C
Testing Circuitry	Figure A

1. Graph

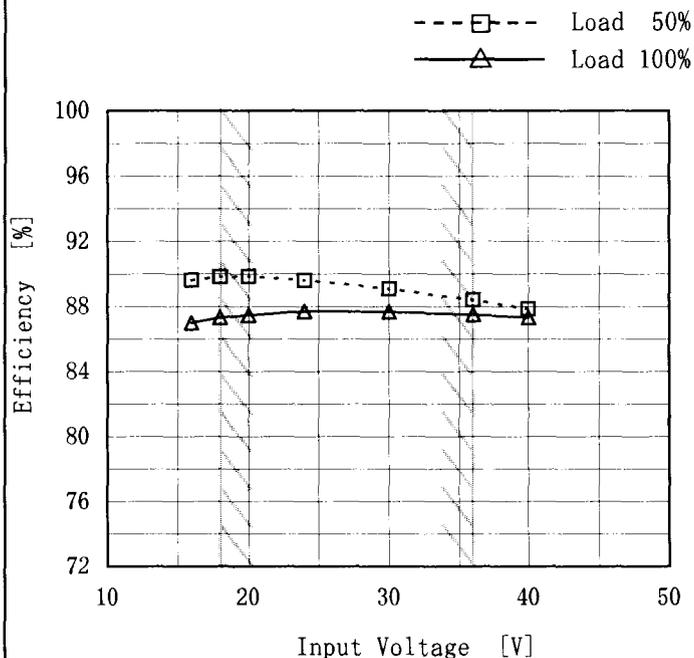

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values


Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
16	89.6	87.0
18	89.8	87.3
20	89.8	87.5
24	89.6	87.7
30	89.1	87.7
36	88.4	87.5
40	87.8	87.3
--	--	--
--	--	--



Model	CBS2002412
Item	Efficiency (by Load Current) 効率 (負荷特性)
Object	

Temperature 25°C
Testing Circuitry Figure A

1. Graph
- △— Input Volt. 18V
 - - -□- - - Input Volt. 24V
 - · - ○ - · - - Input Volt. 36V

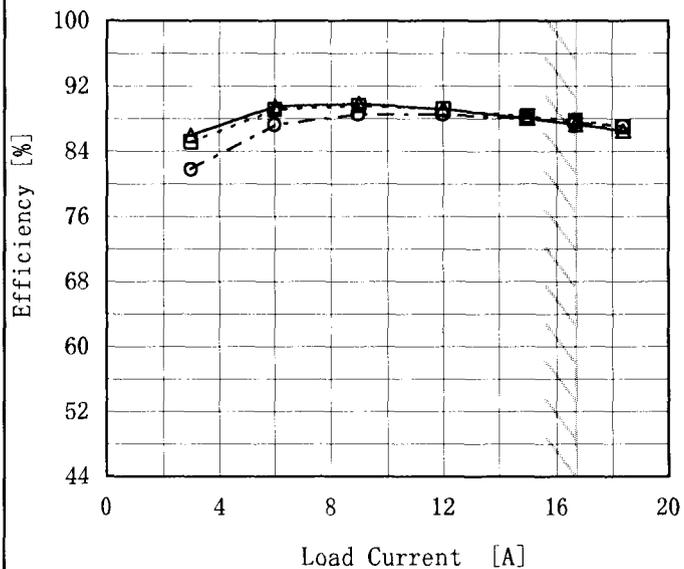

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	—	—	—
3.00	86.0	85.1	81.7
6.00	89.5	89.1	87.2
9.00	89.8	89.6	88.5
12.00	89.2	89.2	88.5
15.00	88.1	88.3	88.0
16.70	87.3	87.8	87.6
18.37	86.5	87.1	87.1
--	--	--	--
--	--	--	--
--	--	--	--

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。



Model		CBS2002412		Temperature		25°C																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+12V16.7A																																																				
1. Graph				2. Values																																																		
<p> △ Input Volt. 18V □ Input Volt. 24V ○ Input Volt. 36V </p> <p style="text-align: center;">Output Voltage [V]</p> <p style="text-align: center;">Load Current [A]</p>				<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>11.993</td><td>11.993</td><td>11.992</td></tr> <tr><td>3.00</td><td>11.993</td><td>11.993</td><td>11.992</td></tr> <tr><td>6.00</td><td>11.993</td><td>11.992</td><td>11.992</td></tr> <tr><td>9.00</td><td>11.993</td><td>11.992</td><td>11.992</td></tr> <tr><td>12.00</td><td>11.993</td><td>11.992</td><td>11.992</td></tr> <tr><td>15.00</td><td>11.993</td><td>11.993</td><td>11.992</td></tr> <tr><td>16.70</td><td>11.993</td><td>11.992</td><td>11.992</td></tr> <tr><td>18.37</td><td>11.993</td><td>11.992</td><td>11.992</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>				Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	11.993	11.993	11.992	3.00	11.993	11.993	11.992	6.00	11.993	11.992	11.992	9.00	11.993	11.992	11.992	12.00	11.993	11.992	11.992	15.00	11.993	11.993	11.992	16.70	11.993	11.992	11.992	18.37	11.993	11.992	11.992	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	11.993	11.993	11.992																																																			
3.00	11.993	11.993	11.992																																																			
6.00	11.993	11.992	11.992																																																			
9.00	11.993	11.992	11.992																																																			
12.00	11.993	11.992	11.992																																																			
15.00	11.993	11.993	11.992																																																			
16.70	11.993	11.992	11.992																																																			
18.37	11.993	11.992	11.992																																																			
--	--	--	--																																																			
--	--	--	--																																																			
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p>																																																						

Model CBS2002412		Temperature 25°C																																						
Item Ripple Voltage (by Load Current) リップル電圧 (負荷特性)		Testing Circuitry Figure A																																						
Object +12V16.7A																																								
<p>1. Graph</p> <p> —△— Input Volt. 18V - -○- - Input Volt. 36V </p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>5</td><td>5</td></tr> <tr><td>3.3</td><td>20</td><td>25</td></tr> <tr><td>6.7</td><td>20</td><td>25</td></tr> <tr><td>10.0</td><td>20</td><td>25</td></tr> <tr><td>13.4</td><td>20</td><td>25</td></tr> <tr><td>16.7</td><td>20</td><td>25</td></tr> <tr><td>20.0</td><td>20</td><td>25</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.0	5	5	3.3	20	25	6.7	20	25	10.0	20	25	13.4	20	25	16.7	20	25	20.0	20	25	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.0	5	5																																						
3.3	20	25																																						
6.7	20	25																																						
10.0	20	25																																						
13.4	20	25																																						
16.7	20	25																																						
20.0	20	25																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
<p>Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form 図 リップル波形詳細図</p>																																								


Model CBS2002412		Temperature 25°C Testing Circuitry Figure A																																						
Item Ripple-Noise リップルノイズ																																								
Object +12V16.7A																																								
1. Graph		2. Values																																						
		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple-Noise [mV]</th> </tr> <tr> <th>Input Volt. 18 [V]</th> <th>Input Volt. 36 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15</td><td>15</td></tr> <tr><td>3.3</td><td>25</td><td>40</td></tr> <tr><td>6.7</td><td>30</td><td>40</td></tr> <tr><td>10.0</td><td>35</td><td>40</td></tr> <tr><td>13.4</td><td>40</td><td>45</td></tr> <tr><td>16.7</td><td>50</td><td>50</td></tr> <tr><td>20.0</td><td>55</td><td>55</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Load Current [A]	Ripple-Noise [mV]		Input Volt. 18 [V]	Input Volt. 36 [V]	0.0	15	15	3.3	25	40	6.7	30	40	10.0	35	40	13.4	40	45	16.7	50	50	20.0	55	55	--	--	--	--	--	--	--	--	--	--	--	--
Load Current [A]	Ripple-Noise [mV]																																							
	Input Volt. 18 [V]	Input Volt. 36 [V]																																						
0.0	15	15																																						
3.3	25	40																																						
6.7	30	40																																						
10.0	35	40																																						
13.4	40	45																																						
16.7	50	50																																						
20.0	55	55																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
--	--	--																																						
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p-p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p>																																								
<p>Fig. Complex Ripple Noise Wave Form 図 リップルノイズ波形</p>																																								



Model	CBS2002412
Item	Overcurrent Protection 過電流保護
Object	+12V16.7A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

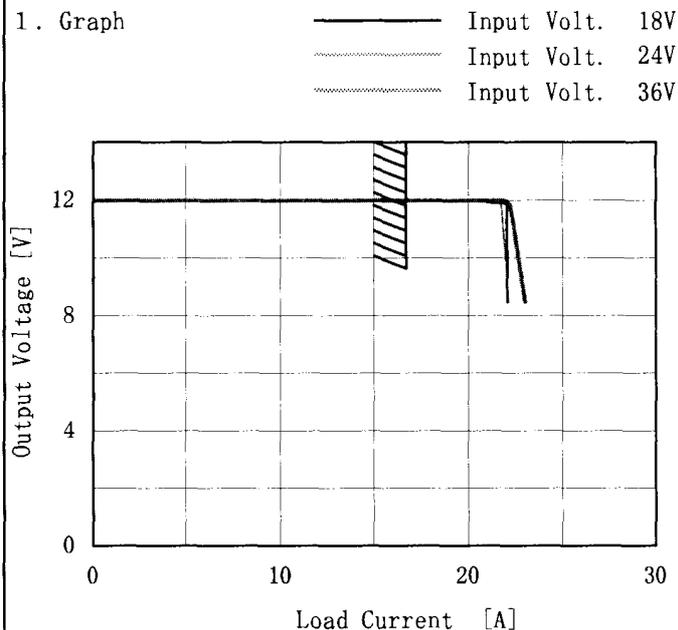

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Intermittent operation occurs when the output voltage is from 8.4V to 0V.

8.4V~0V間は、間欠モードとなる。


2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
12.0	0.00	0.00	0.00
11.4	22.09	21.84	22.40
10.8	22.07	21.90	22.52
9.6	22.10	22.03	22.76
8.4	22.10	22.18	23.08
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--

Model	CBS2002412
Item	Overvoltage Protection 過電圧保護
Object	+12V16.7A

Testing Circuitry Figure A

1. Graph
- △— Input Volt. 18V
 - Input Volt. 24V
 - Input Volt. 36V

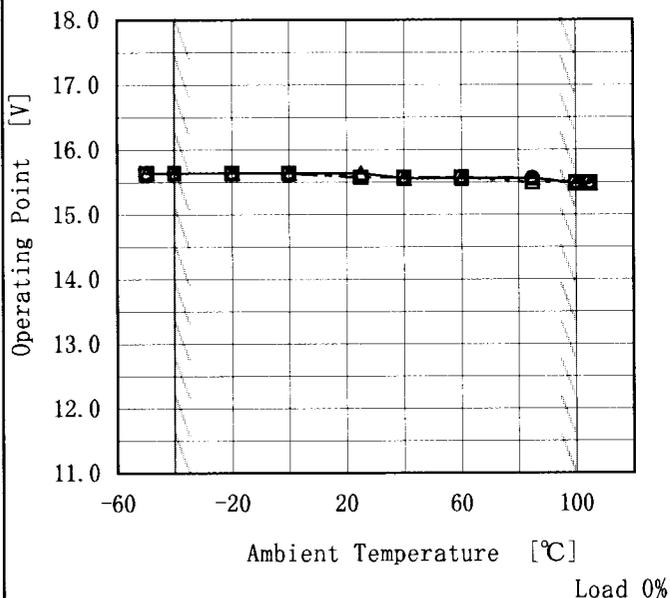

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-50	15.64	15.64	15.64
-40	15.64	15.64	15.64
-20	15.64	15.64	15.64
0	15.64	15.64	15.64
25	15.64	15.57	15.57
40	15.56	15.57	15.57
60	15.56	15.57	15.57
85	15.56	15.49	15.56
100	15.48	15.49	15.49
105	15.48	15.49	15.49
--	--	--	--





Model	CBS2002412	Temperature	25°C
Item	Dynamic Load Response 動的負荷変動	Testing Circuitry	Figure A
Object	+12V16.7A		



Input Volt. 24 V
Cycle 1000 ms





Min. Load (0A) ←→
Load 100% (16.7A)

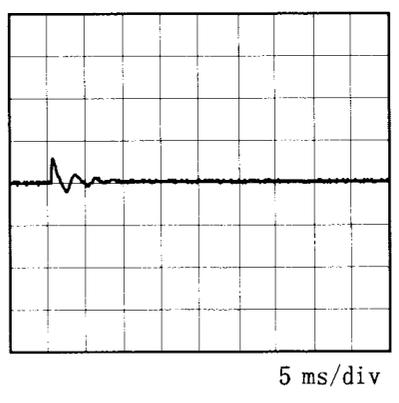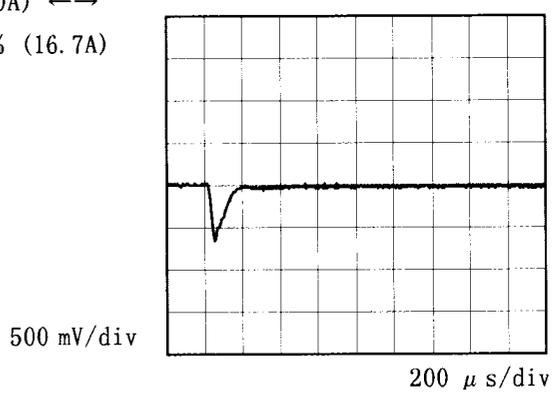

Min. Load (0A) ←→
Load 50% (8.35A)

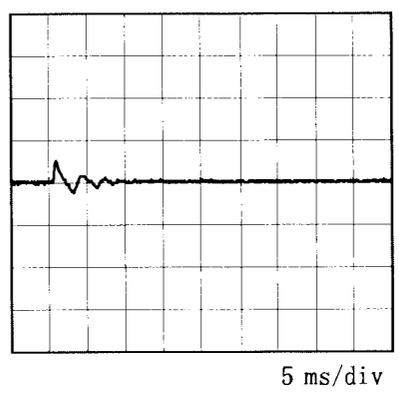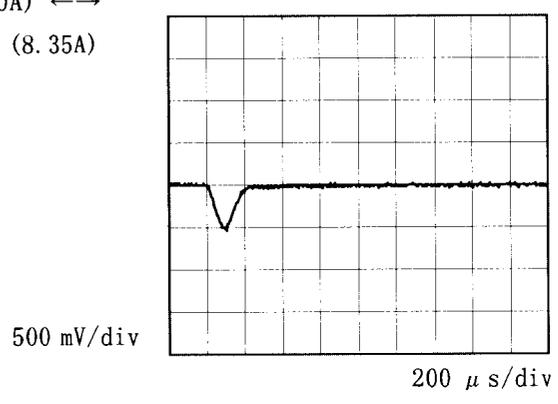


Load 10% (1.67A) ←→
Load 100% (16.7A)

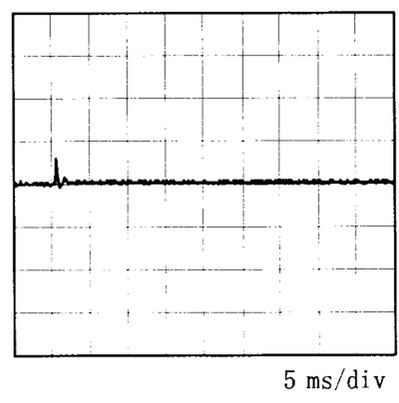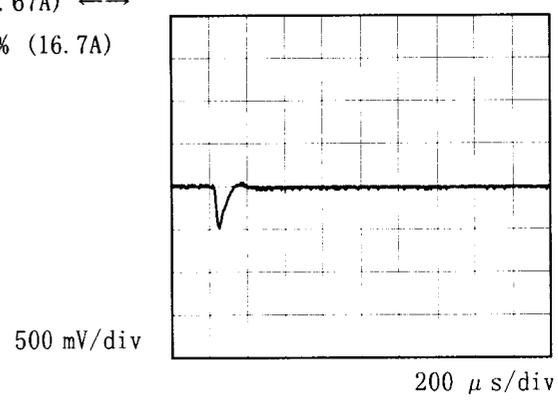


Model	CBS2002412	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V16.7A		

1. Graph

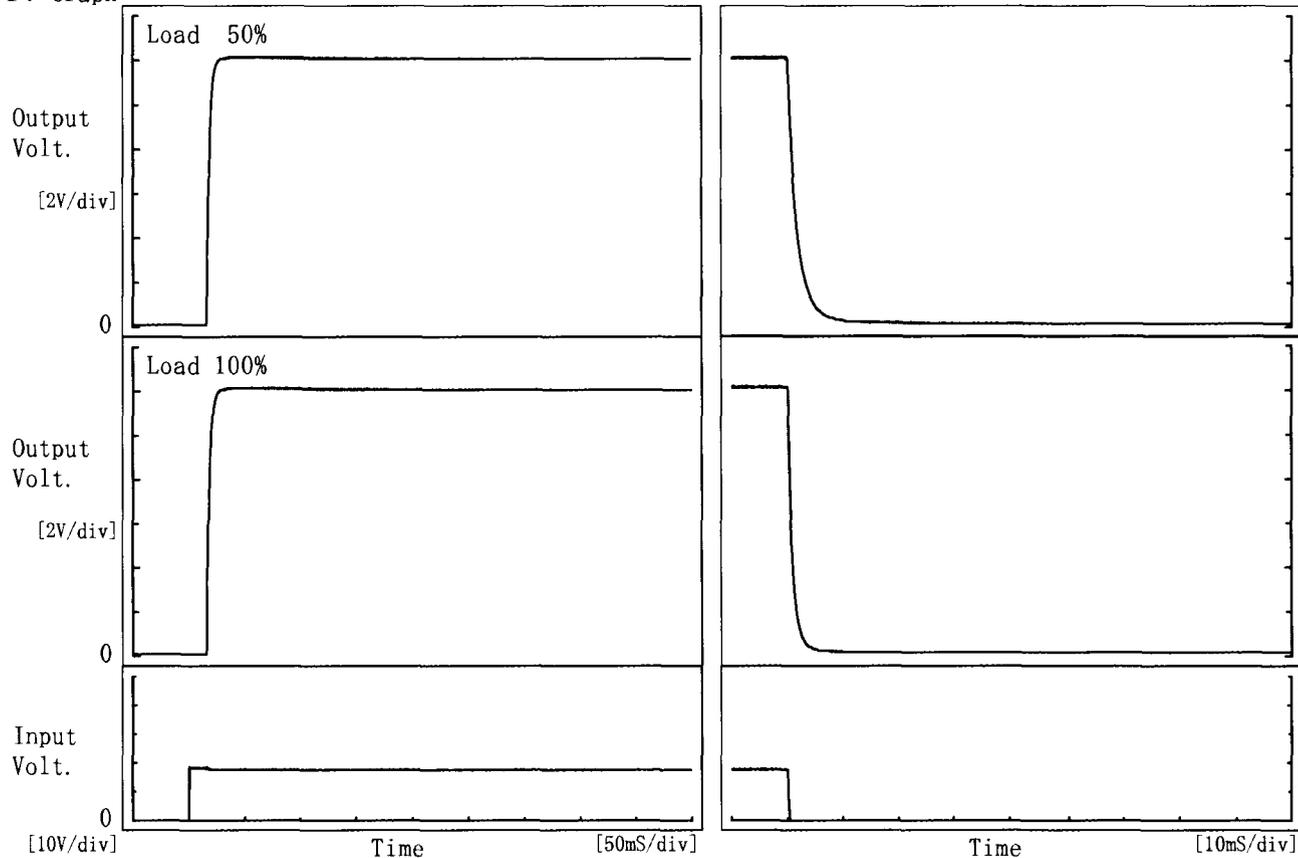

2. Values


		[mS]				
Load	Time	T _d	T _r	T _s	T _h	T _f
50 %		16.0	5.8	21.8	0.2	4.0
100 %		16.0	5.8	21.8	0.1	2.1

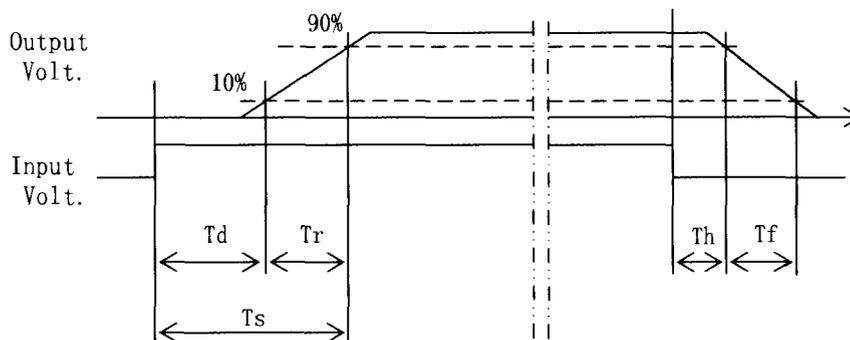

Model	CBS2002412
Item	Ambient Temperature Drift 周囲温度変動
Object	+12V16.7A

Testing Circuitry Figure A

1. Graph
- △— Input Volt. 18V
 - Input Volt. 24V
 - Input Volt. 36V

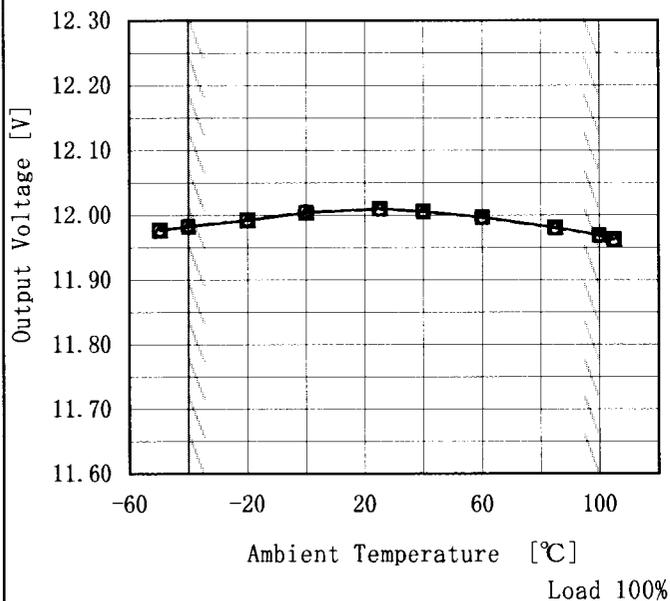

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-50	11.977	11.977	11.978
-40	11.982	11.983	11.983
-20	11.992	11.992	11.993
0	12.004	12.004	12.005
25	12.010	12.010	12.009
40	12.006	12.006	12.006
60	11.997	11.997	11.996
85	11.981	11.981	11.980
100	11.969	11.969	11.968
105	11.963	11.962	11.962
--	—	—	—

Model	CBS2002412
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+12V16.7A

Testing Circuitry Figure A

1. Graph

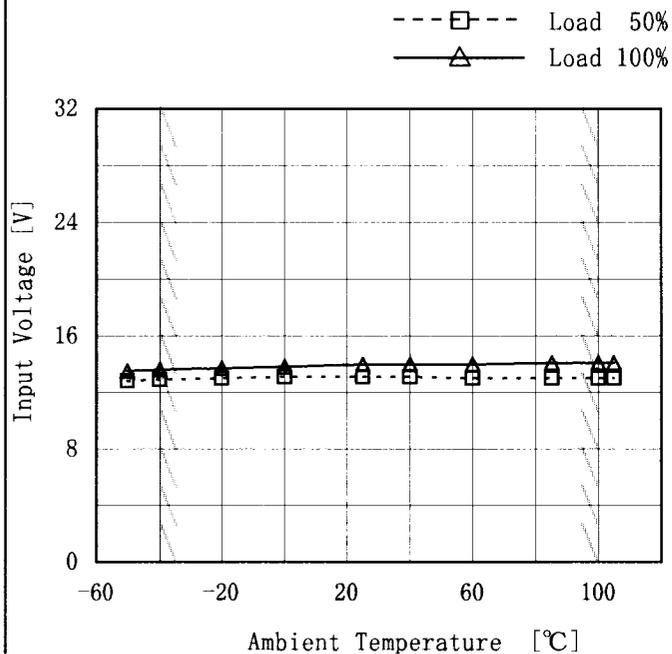

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-50	12.8	13.5
-40	12.9	13.6
-20	13.0	13.7
0	13.1	13.8
25	13.1	14.0
40	13.1	14.0
60	13.0	14.0
85	13.0	14.1
100	13.0	14.1
105	13.0	14.1
--	—	—


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Model	CBS2002412
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+12V16.7A

Testing Circuitry Figure A

1. Graph

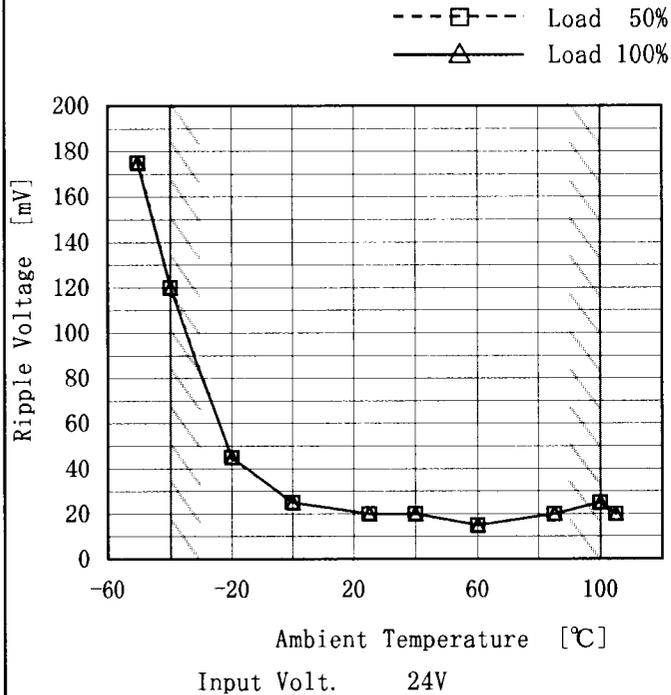

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	175	175
-40	120	120
-20	45	45
0	25	25
25	20	20
40	20	20
60	15	15
85	20	20
100	25	25
105	20	20
---	—	—

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。



Model		CBS2002412		Temperature		25°C																							
Item		Time Lapse Drift 経時ドリフト		Testing Circuitry		Figure A																							
Object		+12V16.7A																											
1. Graph				2. Values																									
<p style="text-align: center;">Time [H]</p> <p>Input Volt. 24V Load 100%</p>				<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.001</td></tr> <tr><td>0.5</td><td>11.996</td></tr> <tr><td>1.0</td><td>11.996</td></tr> <tr><td>2.0</td><td>11.996</td></tr> <tr><td>3.0</td><td>11.996</td></tr> <tr><td>4.0</td><td>11.996</td></tr> <tr><td>5.0</td><td>11.996</td></tr> <tr><td>6.0</td><td>11.996</td></tr> <tr><td>7.0</td><td>11.996</td></tr> <tr><td>8.0</td><td>11.996</td></tr> </tbody> </table>				Time since start [H]	Output Voltage [V]	0.0	12.001	0.5	11.996	1.0	11.996	2.0	11.996	3.0	11.996	4.0	11.996	5.0	11.996	6.0	11.996	7.0	11.996	8.0	11.996
Time since start [H]	Output Voltage [V]																												
0.0	12.001																												
0.5	11.996																												
1.0	11.996																												
2.0	11.996																												
3.0	11.996																												
4.0	11.996																												
5.0	11.996																												
6.0	11.996																												
7.0	11.996																												
8.0	11.996																												



COSEL		
Model	CBS2002412	
Item	Output Voltage Accuracy 定電圧精度	Testing Circuitry Figure A
Object	+12V16.7A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 16.7A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 16.7A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	36	16.7	12.010	±22	±0.2
Minimum Voltage	100	36	0	11.966		



COSEL		
Model	CBS2002412	
Item	Condense 結露特性	Testing Circuitry Figure A
Object	+12V16.7A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	12.004	Input Volt. :24V, Load Current. :16.7A
Line Regulation [mV]	1	Input Volt. :18~36V, Load Current. :16.7A
Load Regulation [mV]	1	Input Volt. :24V, Load Current. :0~16.7A



Model		CBS2002412	Temperature		25°C
Item		Line Noise Tolerance 入力雑音耐量	Testing Circuitry		Figure B
Object		+12V16.7A			

1. Conditions

- Input Voltage : 24 V
- Pulse Voltage : 2000 V
- Pulse Cycle : 16.7 mS
- Pulse Input Duration : 1 min. or more
- Load : 100 %

2. Results

Pulse Width [nS]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
		POLARITY	保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

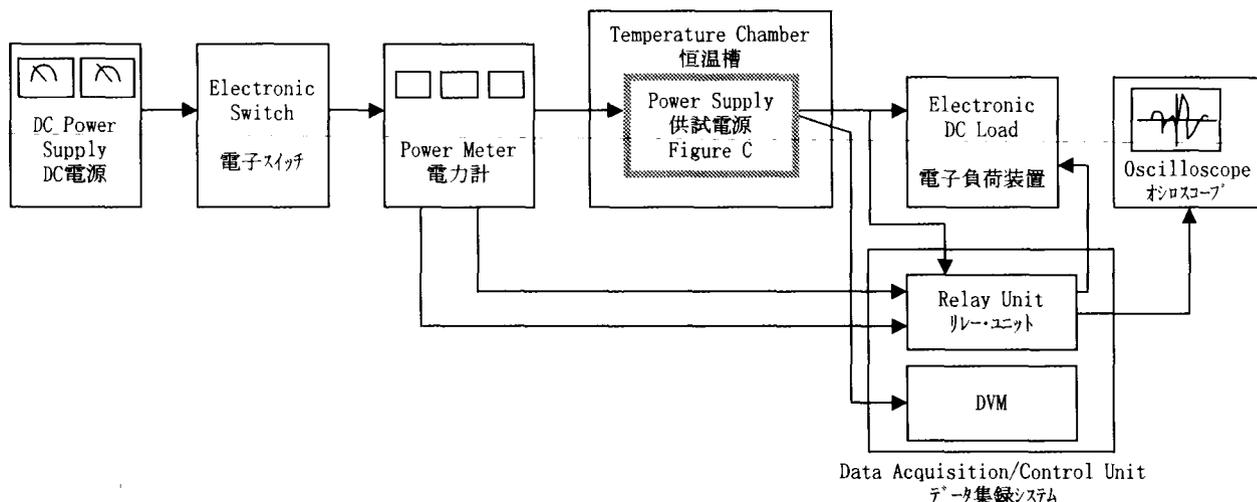


Figure A


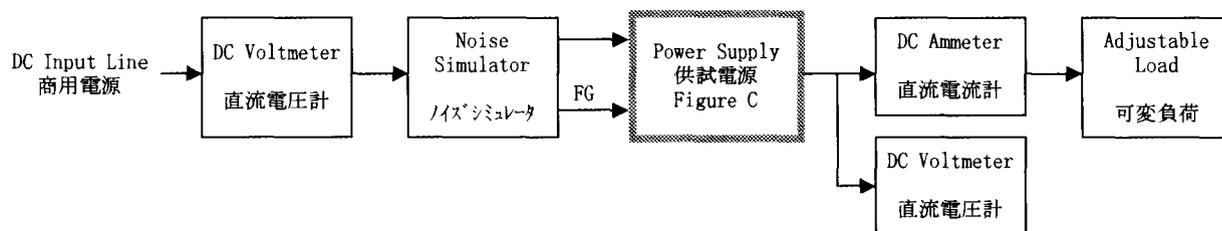


Figure B

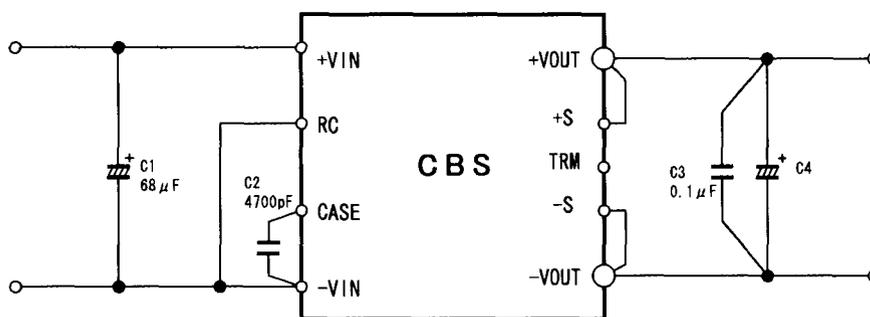

- C1 : 50V 68 μ F
- C2 : 4700pF
- C3 : 50V 0.1 μ F
- C4 : 25V 1000 μ F × 2 (-40°C ≤ T_B ≤ -20°C)
- 25V 1000 μ F (-20°C < T_B ≤ 100°C)
- T_B : Base Plate Temp.

Figure C