



TEST DATA OF CBS2002415

(24V INPUT)

Regulated DC Power Supply
Apr. 9, 2002

Approved by : Isao Yasuda _____
Isao Yasuda Design Manager

Prepared by : Tomoaki Oiwake _____
Tomoaki Oiwake Design Engineer

コーワセル株式会社
COSEL CO.,LTD.



C O N T E N T S

1. Line Regulation	1
静的の入力変動	
2. Input Current (by Input Voltage)	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current)	3
入力電流 (負荷特性)	
4. Input Power (by Load Current)	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage)	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current)	6
効率 (負荷特性)	
7. Load Regulation	7
静的の負荷変動	
8. Ripple Voltage (by Load Current)	8
リップル電圧 (負荷特性)	
9. Ripple-Noise	9
リップルノイズ	
10. Overcurrent Protection	10
過電流保護	
11. Overvoltage Protection	11
過電圧保護	
12. Dynamic Load Response	12
動的の負荷変動	
13. Rise and Fall Time	13
立上り、立下り時間	
14. Ambient Temperature Drift	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature)	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift	17
経時ドリフト	
18. Output Voltage Accuracy	18
定電圧精度	
19. Condensation	19
結露特性	
20. Line Noise Tolerance	20
入力雑音耐量	
21. Figure of Testing Circuitry	21
測定回路図	


(Final Page 21)

COSSEL

Model	CBS2002415
Item	Line Regulation 静的入力変動
Object	+15V13.4A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

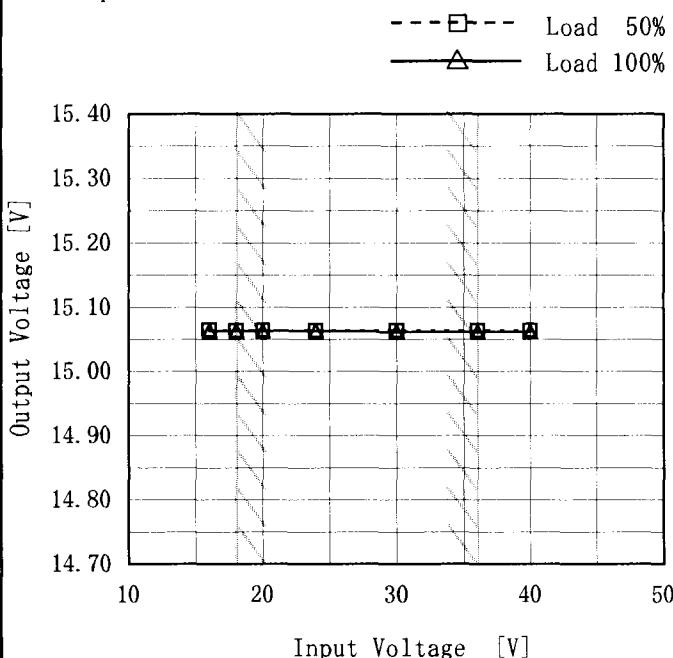

2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
16	15.065	15.063
18	15.064	15.063
20	15.064	15.063
24	15.064	15.063
30	15.064	15.062
36	15.064	15.062
40	15.064	15.062
--	--	--
--	--	--

Note: Slanted line shows the range of the rated input voltage.


(注) 斜線は定格入力電圧範囲を示す。

Model	CBS2002415
Item	Input Current (by Input Voltage) 入力電流 (入力電圧特性)
Object	_____

Temperature 25°C
Testing Circuitry Figure A

1. Graph

—△— Load 100%
---□--- Load 50%
- - -○- Load 0%

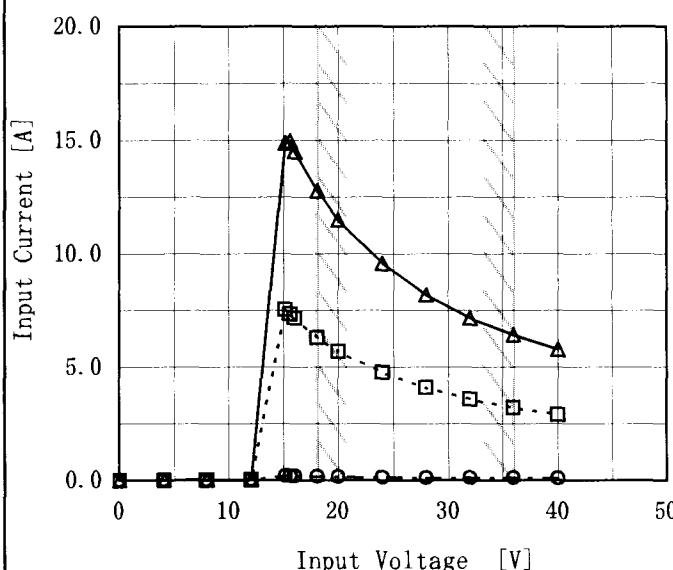

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Input Current [A]		
	Load 0%	Load 50%	Load 100%
0	0.000	0.000	0.000
4.0	0.002	0.001	0.000
8.0	0.022	0.021	0.020
12.0	0.016	0.017	0.016
15.2	0.196	7.539	14.868
15.6	0.192	7.363	14.952
16.0	0.189	7.157	14.501
18.0	0.172	6.302	12.779
20.0	0.156	5.694	11.486
24.0	0.126	4.779	9.582
28.0	0.110	4.106	8.191
32.0	0.104	3.599	7.169
36.0	0.097	3.211	6.424
40.0	0.089	2.902	5.787
--	--	--	--
--	--	--	--

Model	CBS2002415																																																					
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																			
Object																																																						
1. Graph	<p>—△— Input Volt. 18V - - -□- Input Volt. 24V - - -○- Input Volt. 36V</p>																																																					
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>0.171</td><td>0.125</td><td>0.097</td></tr> <tr> <td>2.00</td><td>2.025</td><td>1.534</td><td>1.067</td></tr> <tr> <td>4.00</td><td>3.843</td><td>2.896</td><td>1.983</td></tr> <tr> <td>6.00</td><td>5.655</td><td>4.275</td><td>2.896</td></tr> <tr> <td>8.00</td><td>7.576</td><td>5.688</td><td>3.785</td></tr> <tr> <td>10.00</td><td>9.517</td><td>7.060</td><td>4.725</td></tr> <tr> <td>12.00</td><td>11.365</td><td>8.539</td><td>5.689</td></tr> <tr> <td>13.40</td><td>12.821</td><td>9.597</td><td>6.373</td></tr> <tr> <td>14.74</td><td>14.268</td><td>10.551</td><td>7.044</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.171	0.125	0.097	2.00	2.025	1.534	1.067	4.00	3.843	2.896	1.983	6.00	5.655	4.275	2.896	8.00	7.576	5.688	3.785	10.00	9.517	7.060	4.725	12.00	11.365	8.539	5.689	13.40	12.821	9.597	6.373	14.74	14.268	10.551	7.044	--	--	--	--	--	--	--	--
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.171	0.125	0.097																																																			
2.00	2.025	1.534	1.067																																																			
4.00	3.843	2.896	1.983																																																			
6.00	5.655	4.275	2.896																																																			
8.00	7.576	5.688	3.785																																																			
10.00	9.517	7.060	4.725																																																			
12.00	11.365	8.539	5.689																																																			
13.40	12.821	9.597	6.373																																																			
14.74	14.268	10.551	7.044																																																			
--	--	--	--																																																			
--	--	--	--																																																			
Note: Slanted line shows the range of the rated load current.																																																						
(注) 斜線は定格負荷電流範囲を示す。																																																						


Model	CBS2002415																																																						
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																				
Object																																																							
1. Graph	<p style="text-align: center;"> —△— Input Volt. 18V ---□--- Input Volt. 24V ---○--- Input Volt. 36V </p> <table border="1"> <caption>Data points estimated from the graph</caption> <thead> <tr> <th>Load Current [A]</th> <th>18V [W]</th> <th>24V [W]</th> <th>36V [W]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>2.00</td><td>36.4</td><td>36.4</td><td>36.4</td></tr> <tr><td>4.00</td><td>72.8</td><td>72.8</td><td>72.8</td></tr> <tr><td>6.00</td><td>109.2</td><td>109.2</td><td>109.2</td></tr> <tr><td>8.00</td><td>145.6</td><td>145.6</td><td>145.6</td></tr> <tr><td>10.00</td><td>182.0</td><td>182.0</td><td>182.0</td></tr> <tr><td>12.00</td><td>218.4</td><td>218.4</td><td>218.4</td></tr> <tr><td>14.00</td><td>254.8</td><td>254.8</td><td>254.8</td></tr> <tr><td>14.74</td><td>261.0</td><td>261.0</td><td>261.0</td></tr> </tbody> </table>				Load Current [A]	18V [W]	24V [W]	36V [W]	0.00	0	0	0	2.00	36.4	36.4	36.4	4.00	72.8	72.8	72.8	6.00	109.2	109.2	109.2	8.00	145.6	145.6	145.6	10.00	182.0	182.0	182.0	12.00	218.4	218.4	218.4	14.00	254.8	254.8	254.8	14.74	261.0	261.0	261.0											
Load Current [A]	18V [W]	24V [W]	36V [W]																																																				
0.00	0	0	0																																																				
2.00	36.4	36.4	36.4																																																				
4.00	72.8	72.8	72.8																																																				
6.00	109.2	109.2	109.2																																																				
8.00	145.6	145.6	145.6																																																				
10.00	182.0	182.0	182.0																																																				
12.00	218.4	218.4	218.4																																																				
14.00	254.8	254.8	254.8																																																				
14.74	261.0	261.0	261.0																																																				
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>18[V]</th> <th>24[V]</th> <th>36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>3.1</td><td>3.0</td><td>3.5</td></tr> <tr><td>2.00</td><td>36.4</td><td>36.9</td><td>38.4</td></tr> <tr><td>4.00</td><td>68.7</td><td>69.4</td><td>71.2</td></tr> <tr><td>6.00</td><td>101.7</td><td>102.2</td><td>103.8</td></tr> <tr><td>8.00</td><td>135.2</td><td>135.4</td><td>137.0</td></tr> <tr><td>10.00</td><td>169.6</td><td>169.4</td><td>170.7</td></tr> <tr><td>12.00</td><td>204.8</td><td>204.3</td><td>205.2</td></tr> <tr><td>13.40</td><td>230.0</td><td>228.8</td><td>229.6</td></tr> <tr><td>14.74</td><td>254.6</td><td>253.0</td><td>253.5</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			18[V]	24[V]	36[V]	0.00	3.1	3.0	3.5	2.00	36.4	36.9	38.4	4.00	68.7	69.4	71.2	6.00	101.7	102.2	103.8	8.00	135.2	135.4	137.0	10.00	169.6	169.4	170.7	12.00	204.8	204.3	205.2	13.40	230.0	228.8	229.6	14.74	254.6	253.0	253.5	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																						
	18[V]	24[V]	36[V]																																																				
0.00	3.1	3.0	3.5																																																				
2.00	36.4	36.9	38.4																																																				
4.00	68.7	69.4	71.2																																																				
6.00	101.7	102.2	103.8																																																				
8.00	135.2	135.4	137.0																																																				
10.00	169.6	169.4	170.7																																																				
12.00	204.8	204.3	205.2																																																				
13.40	230.0	228.8	229.6																																																				
14.74	254.6	253.0	253.5																																																				
—	—	—	—																																																				
—	—	—	—																																																				

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Model	CBS2002415
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)
Object	

1. Graph

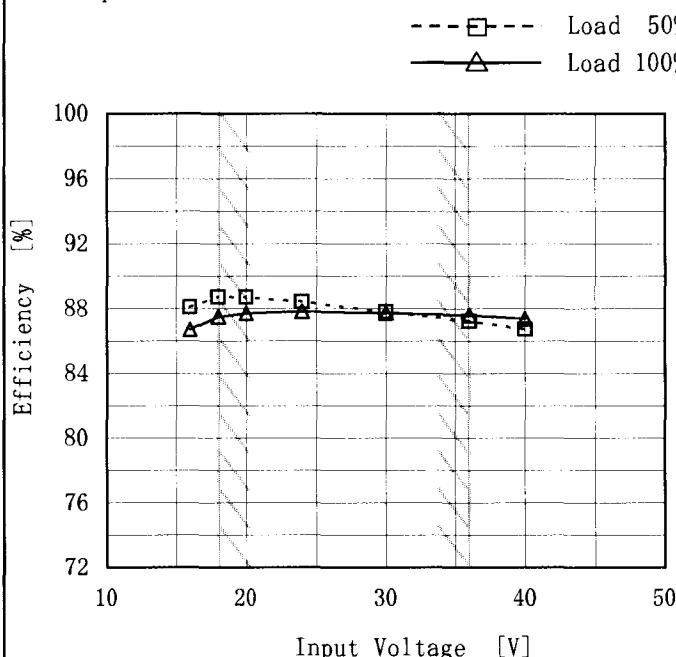

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

Temperature 25°C
Testing Circuitry Figure A

2. Values

Input Voltage [V]	Efficiency [%]	
	Load 50%	Load 100%
16	88.1	86.7
18	88.7	87.5
20	88.7	87.7
24	88.5	87.8
30	87.8	87.7
36	87.2	87.6
40	86.7	87.4
--	--	--
--	--	--

Model CBS2002415


Item Efficiency (by Load Current)
効率(負荷特性)

Object

Temperature 25°C
Testing Circuitry Figure A

1. Graph

— ▲ — Input Volt. 18V
 - - - □ - - Input Volt. 24V
 - - ○ - - Input Volt. 36V

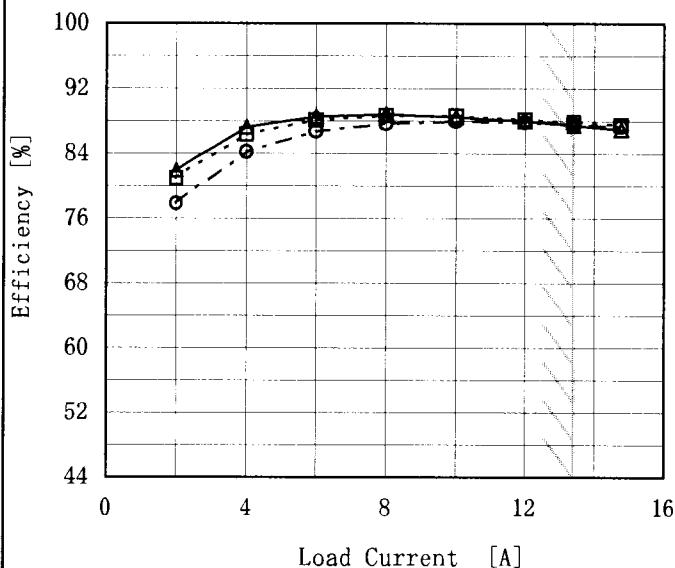

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Efficiency [%]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
0.00	—	—	—
2.00	81.9	80.9	77.8
4.00	87.2	86.3	84.2
6.00	88.6	88.1	86.7
8.00	88.8	88.6	87.6
10.00	88.5	88.6	87.9
12.00	88.0	88.2	87.8
13.40	87.5	87.9	87.6
14.74	86.9	87.5	87.3
--	—	—	—
--	—	—	—



Model	CBS2002415	Temperature	25°C																																														
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																														
Object	+15V13.4A																																																
1. Graph		—△— Input Volt. 18V - -□--- Input Volt. 24V - -○--- Input Volt. 36V																																															
			2. Values																																														
<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>15.064</td><td>15.063</td><td>15.062</td></tr> <tr> <td>2.00</td><td>15.064</td><td>15.063</td><td>15.062</td></tr> <tr> <td>4.00</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>6.00</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>8.00</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>10.00</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>12.00</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>13.40</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>14.74</td><td>15.064</td><td>15.063</td><td>15.063</td></tr> <tr> <td>--</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	15.064	15.063	15.062	2.00	15.064	15.063	15.062	4.00	15.064	15.063	15.063	6.00	15.064	15.063	15.063	8.00	15.064	15.063	15.063	10.00	15.064	15.063	15.063	12.00	15.064	15.063	15.063	13.40	15.064	15.063	15.063	14.74	15.064	15.063	15.063	--	—	—	—
Load Current [A]	Output Voltage [V]																																																
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																														
0.00	15.064	15.063	15.062																																														
2.00	15.064	15.063	15.062																																														
4.00	15.064	15.063	15.063																																														
6.00	15.064	15.063	15.063																																														
8.00	15.064	15.063	15.063																																														
10.00	15.064	15.063	15.063																																														
12.00	15.064	15.063	15.063																																														
13.40	15.064	15.063	15.063																																														
14.74	15.064	15.063	15.063																																														
--	—	—	—																																														


Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

Model	CBS2002415
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷特性)
Object	+15V13.4A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

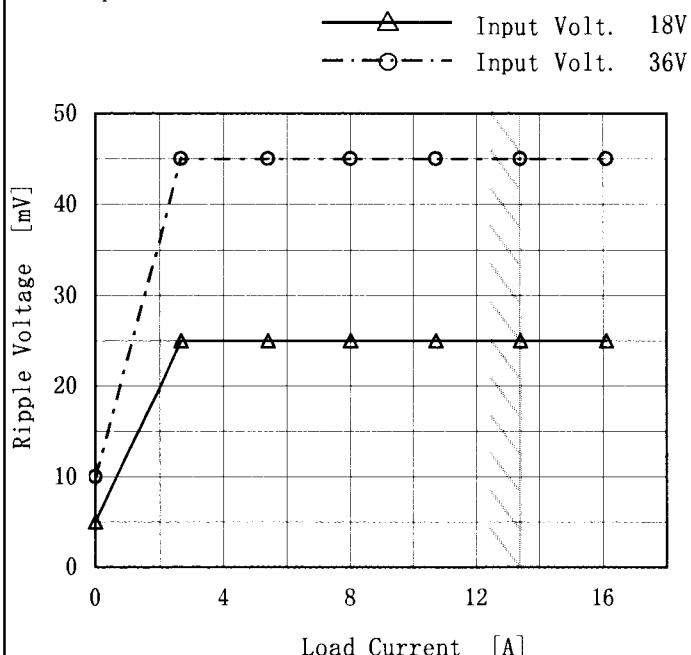

2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	5	10
2.7	25	45
5.4	25	45
8.0	25	45
10.7	25	45
13.4	25	45
16.1	25	45
---	—	—
---	—	—
---	—	—
---	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p – p 値で示される。
(注) 斜線は定格負荷電流範囲を示す。

Ripple [mVp-p]


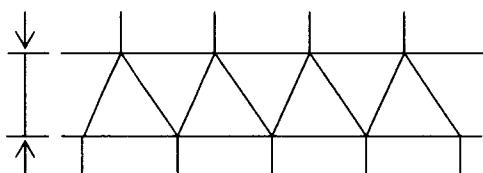


Fig. Complex Ripple Wave Form
図 リップル波形詳細図

Model	CBS2002415
Item	Ripple-Noise リップルノイズ
Object	+15V 13.4A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

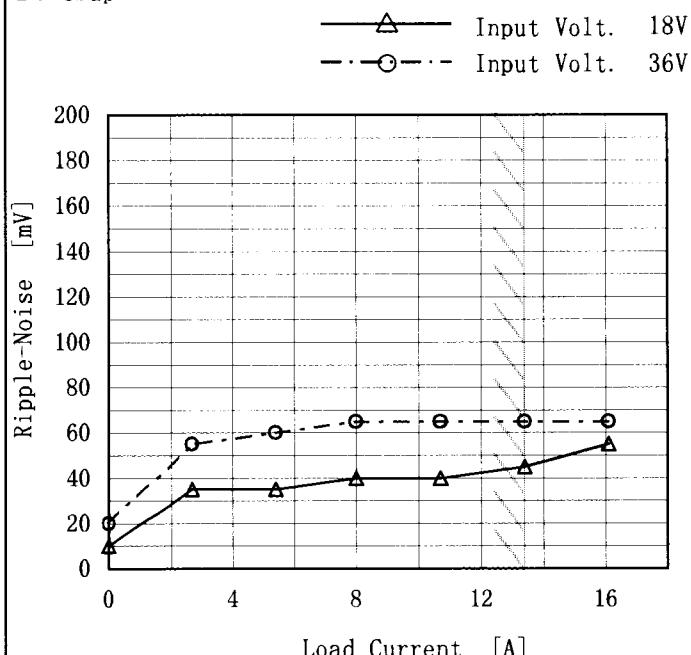

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	10	20
2.7	35	55
5.4	35	60
8.0	40	65
10.7	40	65
13.4	45	65
16.1	55	65
—	—	—
—	—	—
—	—	—
—	—	—

Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

リップルノイズは、下図 p - p 値で示される。
(注) 斜線は定格負荷電流範囲を示す。

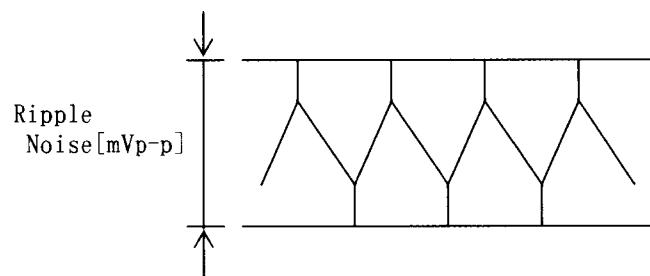


Fig. Complex Ripple Noise Wave Form
図 リップルノイズ波形

COSEL

Model	CBS2002415	Temperature	25°C																																																							
Item	Overcurrent Protection 過電流保護	Testing Circuitry	Figure A																																																							
Object	+15V13.4A	2. Values																																																								
1. Graph	<p>— Input Volt. 18V Input Volt. 24V - - - Input Volt. 36V</p>																																																									
<p>Output Voltage [V]</p> <table> <tr> <td>20</td> <td>16</td> <td>12</td> <td>8</td> <td>4</td> <td>0</td> </tr> </table> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current. (注) 斜線は定格負荷電流範囲を示す。</p> <p>Intermittent operation occurs when the output voltage is from 9V to 0V. 9V~0V間は、間欠モードとなる。</p>			20	16	12	8	4	0																																																		
20	16	12	8	4	0																																																					
			<table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>15.00</td><td>18.21</td><td>17.84</td><td>17.88</td></tr> <tr><td>14.25</td><td>18.30</td><td>17.96</td><td>18.19</td></tr> <tr><td>13.50</td><td>18.27</td><td>18.04</td><td>18.35</td></tr> <tr><td>12.00</td><td>18.28</td><td>18.20</td><td>18.65</td></tr> <tr><td>10.50</td><td>18.35</td><td>18.34</td><td>18.94</td></tr> <tr><td>9.00</td><td>18.41</td><td>18.49</td><td>19.27</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	15.00	18.21	17.84	17.88	14.25	18.30	17.96	18.19	13.50	18.27	18.04	18.35	12.00	18.28	18.20	18.65	10.50	18.35	18.34	18.94	9.00	18.41	18.49	19.27	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																							
15.00	18.21	17.84	17.88																																																							
14.25	18.30	17.96	18.19																																																							
13.50	18.27	18.04	18.35																																																							
12.00	18.28	18.20	18.65																																																							
10.50	18.35	18.34	18.94																																																							
9.00	18.41	18.49	19.27																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							
--	--	--	--																																																							



<p>Model CBS2002415</p> <p>Item Overvoltage Protection 過電圧保護</p> <p>Object +15V13.4A</p>	Testing Circuitry Figure A																																																				
	2. Values																																																				
	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td><td>19.45</td><td>19.49</td><td>19.49</td></tr> <tr> <td>-40</td><td>19.49</td><td>19.49</td><td>19.49</td></tr> <tr> <td>-20</td><td>19.49</td><td>19.49</td><td>19.49</td></tr> <tr> <td>0</td><td>19.56</td><td>19.49</td><td>19.56</td></tr> <tr> <td>25</td><td>19.56</td><td>19.56</td><td>19.56</td></tr> <tr> <td>40</td><td>19.49</td><td>19.49</td><td>19.49</td></tr> <tr> <td>60</td><td>19.49</td><td>19.49</td><td>19.49</td></tr> <tr> <td>85</td><td>19.49</td><td>19.49</td><td>19.49</td></tr> <tr> <td>100</td><td>19.48</td><td>19.49</td><td>19.48</td></tr> <tr> <td>105</td><td>19.41</td><td>19.48</td><td>19.48</td></tr> <tr> <td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>			Ambient Temperature [°C]	Operating Point [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-50	19.45	19.49	19.49	-40	19.49	19.49	19.49	-20	19.49	19.49	19.49	0	19.56	19.49	19.56	25	19.56	19.56	19.56	40	19.49	19.49	19.49	60	19.49	19.49	19.49	85	19.49	19.49	19.49	100	19.48	19.49	19.48	105	19.41	19.48	19.48	--	--	--
Ambient Temperature [°C]	Operating Point [V]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
-50	19.45	19.49	19.49																																																		
-40	19.49	19.49	19.49																																																		
-20	19.49	19.49	19.49																																																		
0	19.56	19.49	19.56																																																		
25	19.56	19.56	19.56																																																		
40	19.49	19.49	19.49																																																		
60	19.49	19.49	19.49																																																		
85	19.49	19.49	19.49																																																		
100	19.48	19.49	19.48																																																		
105	19.41	19.48	19.48																																																		
--	--	--	--																																																		
<p>1. Graph</p> <p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p> <p>Legend: Input Volt. 18V (solid line), Input Volt. 24V (dashed line), Input Volt. 36V (dash-dot line)</p>																																																					

Note: Slanted line shows the range of the rated ambient temperature.


(注) 斜線は定格周囲温度範囲を示す。

COSEL


Model	CBS2002415
Item	Dynamic Load Response 動的負荷變動
Object	+15V13.4A

Temperature 25°C
Testing Circuitry Figure AInput Volt. 24 V
Cycle 1000 msMin. Load (0A) ↔
Load 100% (13.4A)

200 mV/div

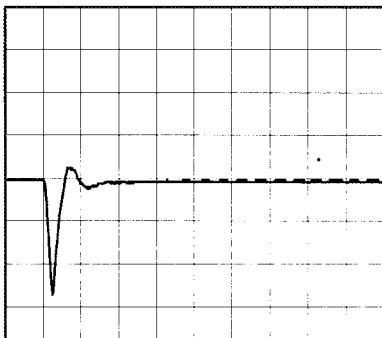


200 μ s/div

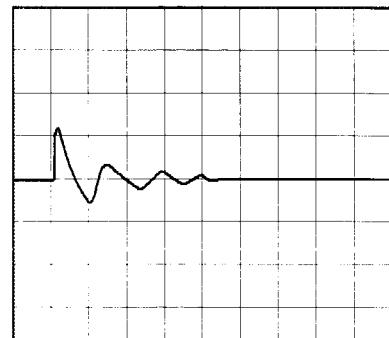


2 ms/div

Min. Load (0A) ↔
Load 50% (6.7A)

200 mV/div

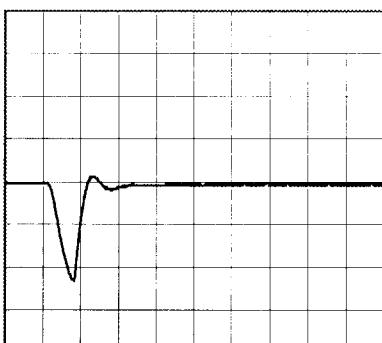


200 μ s/div

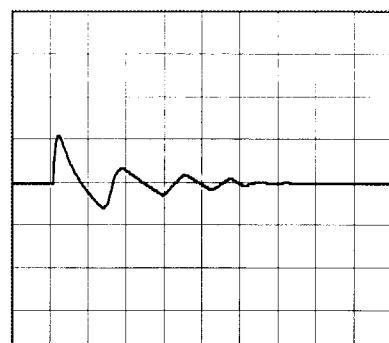


2 ms/div

Load 10% (1.34A) ↔
Load 100% (13.4A)

200 mV/div

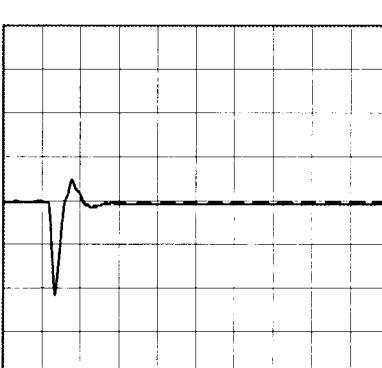

200 μ s/div

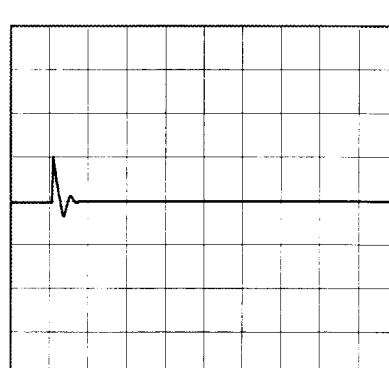

2 ms/div

COSSEL



Model CBS2002415

Item Rise and Fall Time
立上り、立下り時間

Object +15V13.4A


Temperature 25°C
Testing Circuitry Figure A

1. Graph

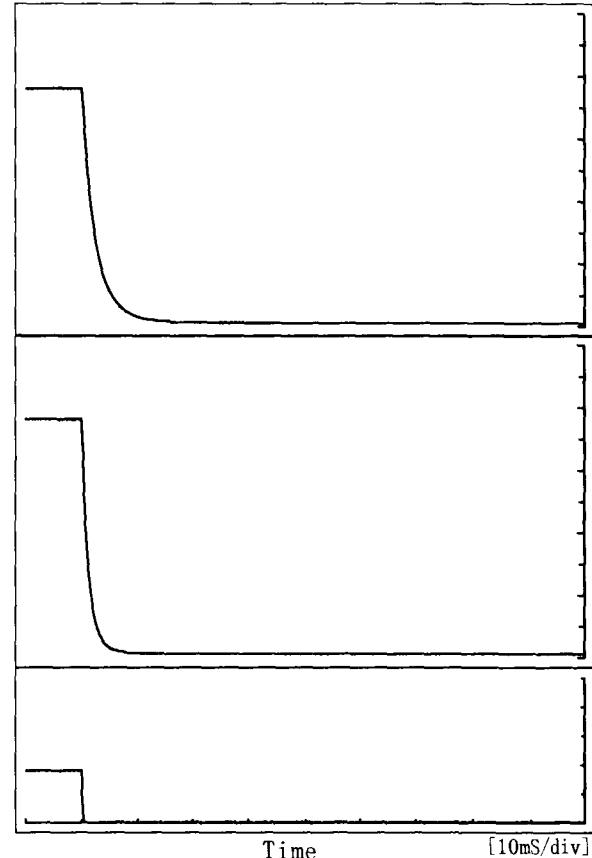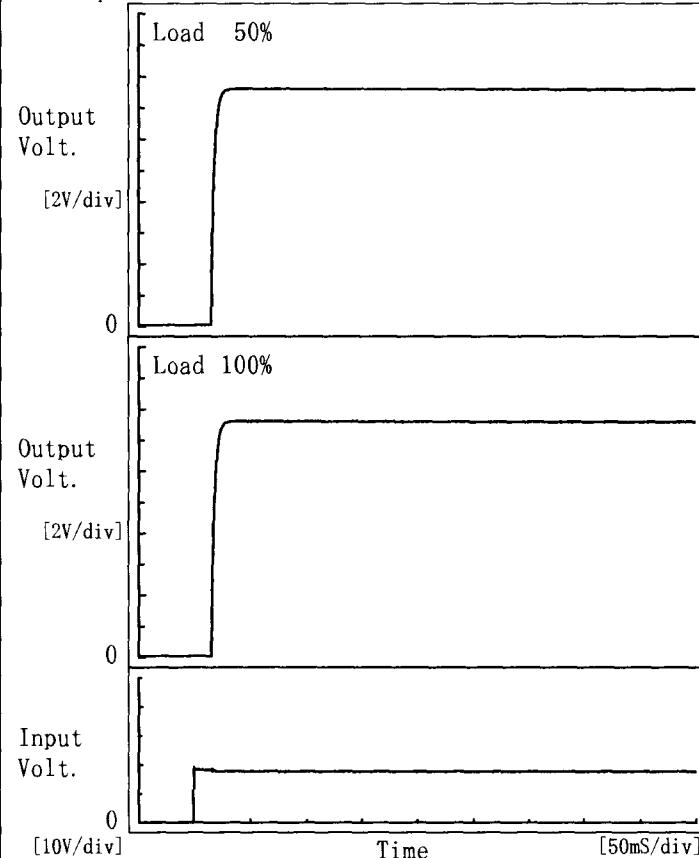


2. Values

Load	Time	T _d	T _r	T _s	T _h	T _f	[mS]
50 %		15.3	5.5	20.8	0.3	6.0	
100 %		15.3	5.5	20.8	0.2	3.1	

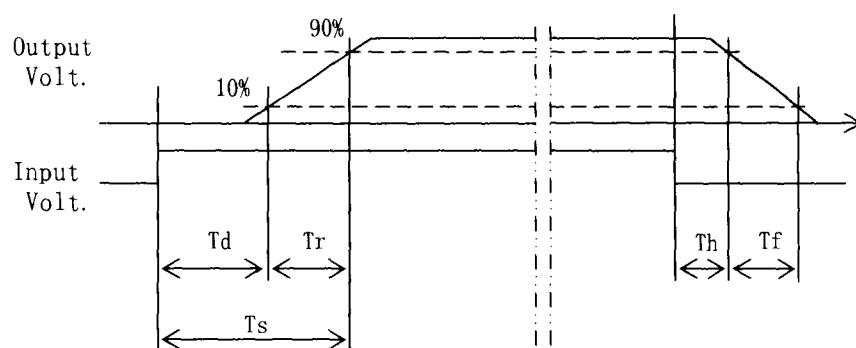


COSSEL

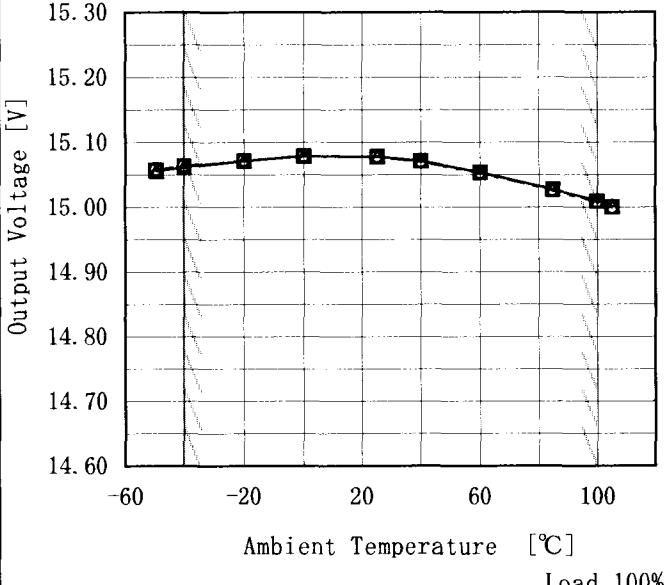Model	CBS2002415																																																				
Item	Ambient Temperature Drift 周囲温度変動																																																				
Object	+15V 13.4A																																																				
1. Graph																																																					
—▲— Input Volt. 18V - - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V		2. Values																																																			
 <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>																																																					
Note: Slanted line shows the range of the rated ambient temperature. (注) 斜線は定格周囲温度範囲を示す。																																																					
<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td> <td>15.056</td> <td>15.057</td> <td>15.058</td> </tr> <tr> <td>-40</td> <td>15.062</td> <td>15.063</td> <td>15.063</td> </tr> <tr> <td>-20</td> <td>15.071</td> <td>15.071</td> <td>15.072</td> </tr> <tr> <td>0</td> <td>15.079</td> <td>15.079</td> <td>15.079</td> </tr> <tr> <td>25</td> <td>15.078</td> <td>15.078</td> <td>15.078</td> </tr> <tr> <td>40</td> <td>15.071</td> <td>15.071</td> <td>15.070</td> </tr> <tr> <td>60</td> <td>15.054</td> <td>15.054</td> <td>15.053</td> </tr> <tr> <td>85</td> <td>15.027</td> <td>15.027</td> <td>15.026</td> </tr> <tr> <td>100</td> <td>15.010</td> <td>15.009</td> <td>15.008</td> </tr> <tr> <td>105</td> <td>15.001</td> <td>15.000</td> <td>14.999</td> </tr> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>			Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-50	15.056	15.057	15.058	-40	15.062	15.063	15.063	-20	15.071	15.071	15.072	0	15.079	15.079	15.079	25	15.078	15.078	15.078	40	15.071	15.071	15.070	60	15.054	15.054	15.053	85	15.027	15.027	15.026	100	15.010	15.009	15.008	105	15.001	15.000	14.999	--	--	--	--
Ambient Temperature [°C]	Output Voltage [V]																																																				
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																		
-50	15.056	15.057	15.058																																																		
-40	15.062	15.063	15.063																																																		
-20	15.071	15.071	15.072																																																		
0	15.079	15.079	15.079																																																		
25	15.078	15.078	15.078																																																		
40	15.071	15.071	15.070																																																		
60	15.054	15.054	15.053																																																		
85	15.027	15.027	15.026																																																		
100	15.010	15.009	15.008																																																		
105	15.001	15.000	14.999																																																		
--	--	--	--																																																		

COSSEL

Model	CBS2002415
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧
Object	+15V13.4A

1. Graph

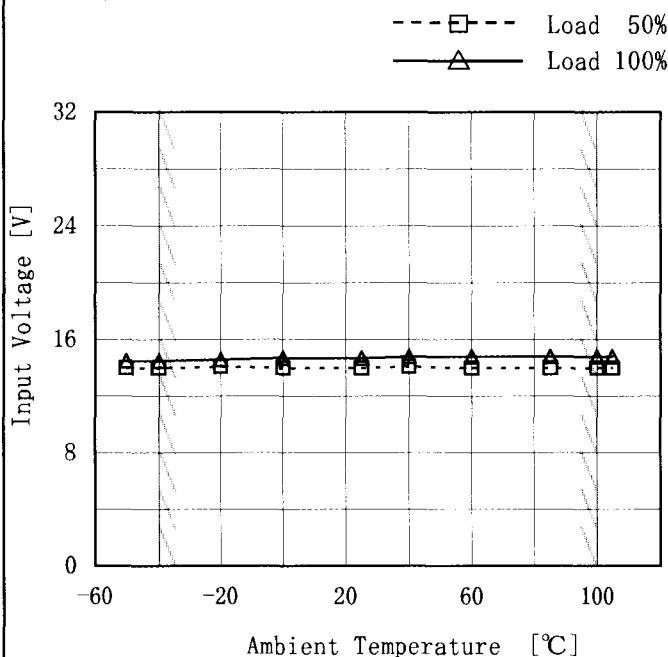

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。


Testing Circuitry Figure A

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-50	14.0	14.5
-40	14.0	14.5
-20	14.1	14.6
0	14.0	14.7
25	14.0	14.7
40	14.1	14.8
60	14.0	14.8
85	14.0	14.8
100	14.0	14.8
105	14.0	14.8
—	—	—

Model	CBS2002415
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+15V 13.4A

1. Graph

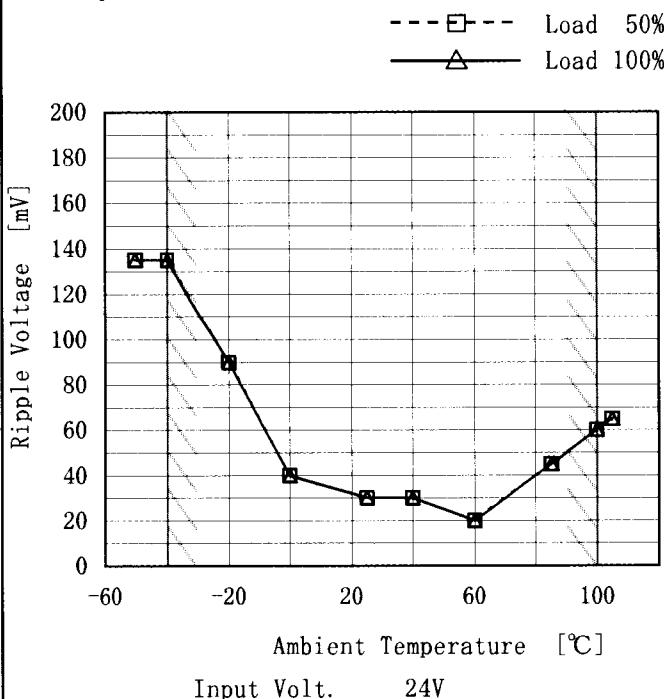

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A


2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	135	135
-40	135	135
-20	90	90
0	40	40
25	30	30
40	30	30
60	20	20
85	45	45
100	60	60
105	65	65
--	—	—

COSEL

Model	CBS2002415
Item	Time Lapse Drift 経時ドリフト
Object	+15V13.4A

1. Graph

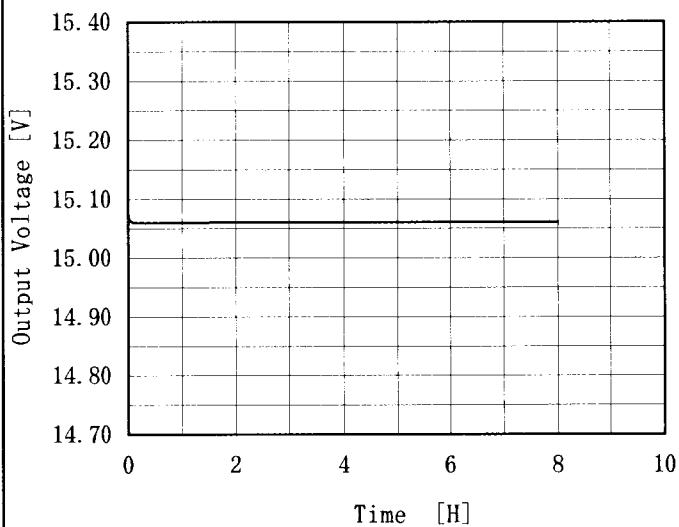

Input Volt. 24V

Load 100%

Temperature	25°C
Testing Circuitry	Figure A

2. Values

Time since start [H]	Output Voltage [V]
0.0	15.071
0.5	15.060
1.0	15.060
2.0	15.061
3.0	15.061
4.0	15.061
5.0	15.061
6.0	15.061
7.0	15.061
8.0	15.061



Model	CBS2002415	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+15V13.4A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 13.4A

* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 13.4A

* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	18	0	15.077	±37	±0.2
Minimum Voltage	100	18	0	15.004		



Model	CBS2002415	Testing Circuitry Figure A
Item	Condense 結露特性	
Object	+15V13.4A	

1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

2. Values

Item	Data	Testing Conditions
Output Voltage [V]	15.045	Input Volt.:24V, Load Current.:13.4A
Line Regulation [mV]	2	Input Volt.:18~36V, Load Current.:13.4A
Load Regulation [mV]	1	Input Volt.:24V, Load Current.:0~13.4A



Model	CBS2002415	Temperature Testing Circuitry	25°C Figure B
Item	Line Noise Tolerance 入力雑音耐量		
Object	+15V13.4A		

1. Conditions

- Input Voltage : 24 V
- Pulse Input Duration : 1 min. or more
- Pulse Voltage : 2000 V
- Load : 100 %
- Pulse Cycle : 16.7 mS

2. Results

Pulse Width [nS]	MODE	No protection failure should occur 保護回路の誤動作がない		DC-like Regulation of Output Voltage 出力電圧の直流的変動
		POLARITY	OK	
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

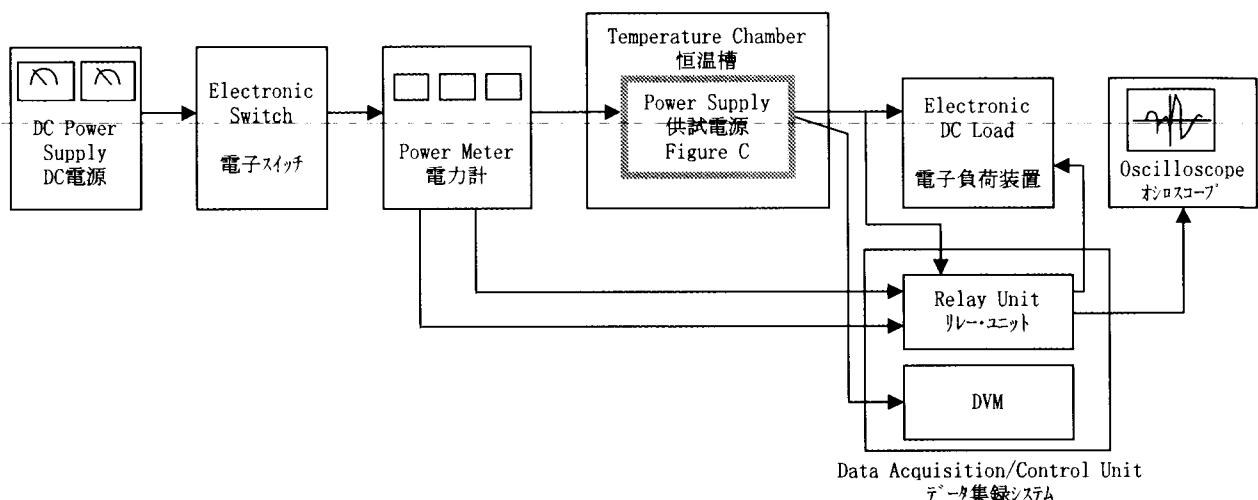


Figure A


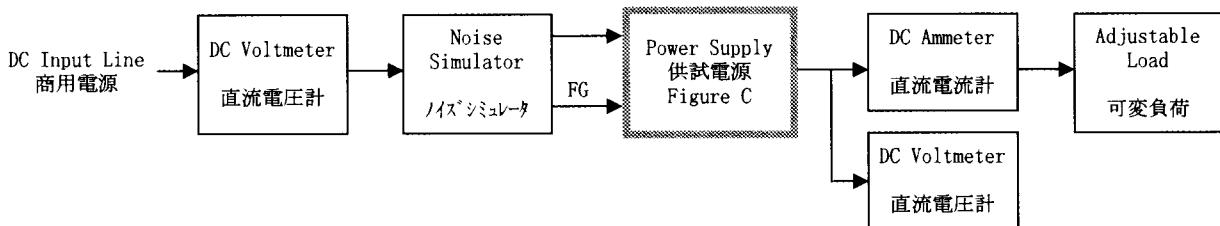


Figure B

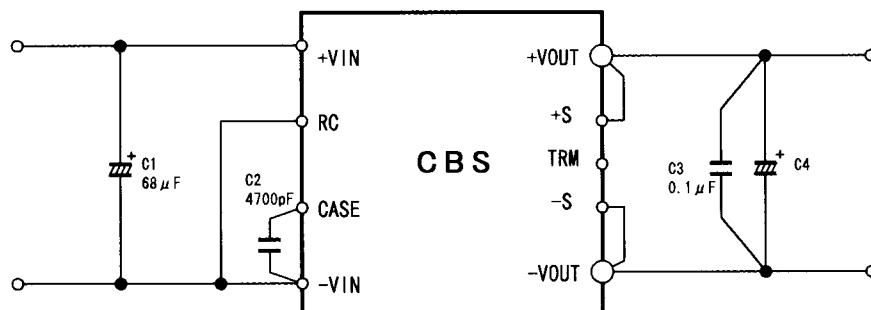

$C_1 : 50V \quad 68\mu F$
 $C_2 : 4700pF$
 $C_3 : 50V \quad 0.1\mu F$
 $C_4 : 25V \quad 1000\mu F \times 2 \quad (-40^\circ C \leq T_B \leq -20^\circ C)$
 $25V \quad 1000\mu F \quad (-20^\circ C < T_B \leq 100^\circ C)$
 $T_B : \text{Base Plate Temp.}$

Figure C