



# TEST DATA OF CBS2002424

(24V INPUT)

Regulated DC Power Supply  
Apr. 9, 2002

Approved by : Isao Yasuda  
Isao Yasuda Design Manager

Prepared by : Tomoaki Oiwake  
Tomoaki Oiwake Design Engineer

コーセル株式会社  
COSEL CO.,LTD.

CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Input Voltage) . . . . .	2
入力電流 (入力電圧特性)	
3. Input Current (by Load Current) . . . . .	3
入力電流 (負荷特性)	
4. Input Power (by Load Current) . . . . .	4
入力電力 (負荷特性)	
5. Efficiency (by Input Voltage) . . . . .	5
効率 (入力電圧特性)	
6. Efficiency (by Load Current) . . . . .	6
効率 (負荷特性)	
7. Load Regulation . . . . .	7
静的負荷変動	
8. Ripple Voltage (by Load Current) . . . . .	8
リップル電圧 (負荷特性)	
9. Ripple-Noise . . . . .	9
リップルノイズ	
10. Overcurrent Protection . . . . .	10
過電流保護	
11. Overvoltage Protection . . . . .	11
過電圧保護	
12. Dynamic Load Response . . . . .	12
動的負荷変動	
13. Rise and Fall Time . . . . .	13
立ち上り、立下り時間	
14. Ambient Temperature Drift . . . . .	14
周囲温度変動	
15. Minimum Input Voltage for Regulated Output Voltage . . . . .	15
最低レギュレーション電圧	
16. Ripple Voltage (by Ambient Temperature) . . . . .	16
リップル電圧 (周囲温度特性)	
17. Time Lapse Drift . . . . .	17
経時ドリフト	
18. Output Voltage Accuracy . . . . .	18
定電圧精度	
19. Condensation . . . . .	19
結露特性	
20. Line Noise Tolerance . . . . .	20
入力雑音耐量	
21. Figure of Testing Circuitry . . . . .	21
測定回路図	

(Final Page 21)

**COSSEL**

Model	CBS2002424	Temperature	25°C																																
Item	Line Regulation 静的入力変動	Testing Circuitry	Figure A																																
Object	+24V8.4A																																		
1. Graph																																			
<p>Output Voltage [V]</p> <p>Input Voltage [V]</p> <p>Legend:</p> <ul style="list-style-type: none"> <li>--□-- Load 50%</li> <li>—△— Load 100%</li> </ul>																																			
Note: Slanted line shows the range of the rated input voltage.																																			
(注) 斜線は定格入力電圧範囲を示す。																																			
2. Values																																			
<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>16</td><td>23.963</td><td>23.961</td></tr> <tr><td>18</td><td>23.962</td><td>23.960</td></tr> <tr><td>20</td><td>23.962</td><td>23.960</td></tr> <tr><td>24</td><td>23.962</td><td>23.961</td></tr> <tr><td>30</td><td>23.962</td><td>23.961</td></tr> <tr><td>36</td><td>23.962</td><td>23.961</td></tr> <tr><td>40</td><td>23.962</td><td>23.961</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	16	23.963	23.961	18	23.962	23.960	20	23.962	23.960	24	23.962	23.961	30	23.962	23.961	36	23.962	23.961	40	23.962	23.961	—	—	—	—	—	—
Input Voltage [V]	Output Voltage [V]																																		
	Load 50%	Load 100%																																	
16	23.963	23.961																																	
18	23.962	23.960																																	
20	23.962	23.960																																	
24	23.962	23.961																																	
30	23.962	23.961																																	
36	23.962	23.961																																	
40	23.962	23.961																																	
—	—	—																																	
—	—	—																																	


**COSSEL**

Model	CBS2002424																																																																									
Item	Input Current (by Input Voltage) 入力電流（入力電圧特性）	Temperature 25°C	Testing Circuitry Figure A																																																																							
Object																																																																										
1. Graph	<p style="text-align: center;"> <span style="color: black;">—△—</span> Load 100%  <span style="color: gray;">---□---</span> Load 50%  <span style="color: gray;">---○---</span> Load 0%         </p> <table border="1"> <caption>Data points estimated from Figure A</caption> <thead> <tr> <th>Input Voltage [V]</th> <th>Load 0% [A]</th> <th>Load 50% [A]</th> <th>Load 100% [A]</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.001</td><td>0.002</td><td>0.001</td></tr> <tr><td>8.0</td><td>0.020</td><td>0.020</td><td>0.020</td></tr> <tr><td>12.0</td><td>0.016</td><td>0.017</td><td>0.015</td></tr> <tr><td>15.2</td><td>0.190</td><td>7.423</td><td>15.096</td></tr> <tr><td>16.0</td><td>0.183</td><td>7.006</td><td>14.214</td></tr> <tr><td>18.0</td><td>0.166</td><td>6.192</td><td>12.573</td></tr> <tr><td>20.0</td><td>0.148</td><td>5.614</td><td>11.307</td></tr> <tr><td>24.0</td><td>0.107</td><td>4.722</td><td>9.457</td></tr> <tr><td>28.0</td><td>0.095</td><td>4.057</td><td>8.106</td></tr> <tr><td>32.0</td><td>0.085</td><td>3.553</td><td>7.128</td></tr> <tr><td>36.0</td><td>0.079</td><td>3.168</td><td>6.375</td></tr> <tr><td>40.0</td><td>0.075</td><td>2.864</td><td>5.751</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>	Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]	0	0.000	0.000	0.000	4.0	0.001	0.002	0.001	8.0	0.020	0.020	0.020	12.0	0.016	0.017	0.015	15.2	0.190	7.423	15.096	16.0	0.183	7.006	14.214	18.0	0.166	6.192	12.573	20.0	0.148	5.614	11.307	24.0	0.107	4.722	9.457	28.0	0.095	4.057	8.106	32.0	0.085	3.553	7.128	36.0	0.079	3.168	6.375	40.0	0.075	2.864	5.751	--	--	--	--	--	--	--	--	--	--	--	--					
Input Voltage [V]	Load 0% [A]	Load 50% [A]	Load 100% [A]																																																																							
0	0.000	0.000	0.000																																																																							
4.0	0.001	0.002	0.001																																																																							
8.0	0.020	0.020	0.020																																																																							
12.0	0.016	0.017	0.015																																																																							
15.2	0.190	7.423	15.096																																																																							
16.0	0.183	7.006	14.214																																																																							
18.0	0.166	6.192	12.573																																																																							
20.0	0.148	5.614	11.307																																																																							
24.0	0.107	4.722	9.457																																																																							
28.0	0.095	4.057	8.106																																																																							
32.0	0.085	3.553	7.128																																																																							
36.0	0.079	3.168	6.375																																																																							
40.0	0.075	2.864	5.751																																																																							
--	--	--	--																																																																							
--	--	--	--																																																																							
--	--	--	--																																																																							
2.	Values																																																																									
	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>4.0</td><td>0.001</td><td>0.002</td><td>0.001</td></tr> <tr><td>8.0</td><td>0.020</td><td>0.020</td><td>0.020</td></tr> <tr><td>12.0</td><td>0.016</td><td>0.017</td><td>0.015</td></tr> <tr><td>15.2</td><td>0.190</td><td>7.423</td><td>15.096</td></tr> <tr><td>16.0</td><td>0.183</td><td>7.006</td><td>14.214</td></tr> <tr><td>18.0</td><td>0.166</td><td>6.192</td><td>12.573</td></tr> <tr><td>20.0</td><td>0.148</td><td>5.614</td><td>11.307</td></tr> <tr><td>24.0</td><td>0.107</td><td>4.722</td><td>9.457</td></tr> <tr><td>28.0</td><td>0.095</td><td>4.057</td><td>8.106</td></tr> <tr><td>32.0</td><td>0.085</td><td>3.553</td><td>7.128</td></tr> <tr><td>36.0</td><td>0.079</td><td>3.168</td><td>6.375</td></tr> <tr><td>40.0</td><td>0.075</td><td>2.864</td><td>5.751</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> <tr><td>--</td><td>--</td><td>--</td><td>--</td></tr> </tbody> </table>			Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	4.0	0.001	0.002	0.001	8.0	0.020	0.020	0.020	12.0	0.016	0.017	0.015	15.2	0.190	7.423	15.096	16.0	0.183	7.006	14.214	18.0	0.166	6.192	12.573	20.0	0.148	5.614	11.307	24.0	0.107	4.722	9.457	28.0	0.095	4.057	8.106	32.0	0.085	3.553	7.128	36.0	0.079	3.168	6.375	40.0	0.075	2.864	5.751	--	--	--	--	--	--	--	--	--	--	--	--
Input Voltage [V]	Input Current [A]																																																																									
	Load 0%	Load 50%	Load 100%																																																																							
0	0.000	0.000	0.000																																																																							
4.0	0.001	0.002	0.001																																																																							
8.0	0.020	0.020	0.020																																																																							
12.0	0.016	0.017	0.015																																																																							
15.2	0.190	7.423	15.096																																																																							
16.0	0.183	7.006	14.214																																																																							
18.0	0.166	6.192	12.573																																																																							
20.0	0.148	5.614	11.307																																																																							
24.0	0.107	4.722	9.457																																																																							
28.0	0.095	4.057	8.106																																																																							
32.0	0.085	3.553	7.128																																																																							
36.0	0.079	3.168	6.375																																																																							
40.0	0.075	2.864	5.751																																																																							
--	--	--	--																																																																							
--	--	--	--																																																																							
--	--	--	--																																																																							

Note: Slanted line shows the range of the rated input voltage.

(注) 斜線は定格入力電圧範囲を示す。

**COSEL**

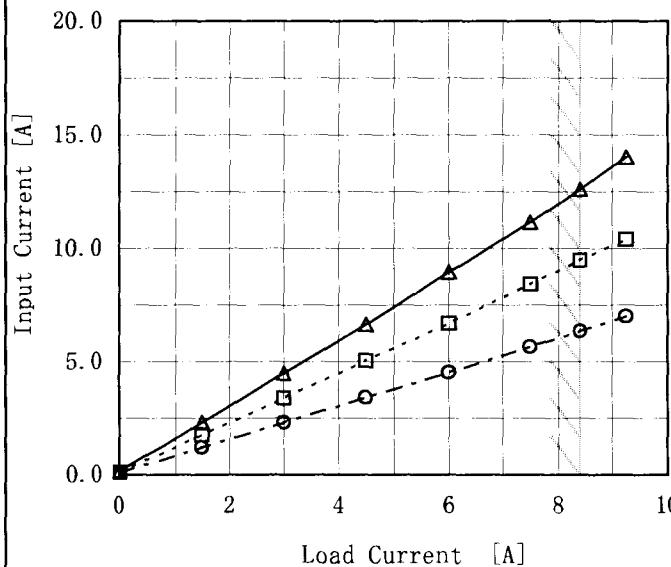Model	CBS2002424																																																					
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Temperature 25°C	Testing Circuitry Figure A																																																			
Object	—																																																					
1. Graph	<p>—▲— Input Volt. 18V      - - - □ - - Input Volt. 24V      - - ○ - - Input Volt. 36V</p> 																																																					
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>0.164</td><td>0.107</td><td>0.079</td></tr> <tr><td>1.50</td><td>2.311</td><td>1.757</td><td>1.206</td></tr> <tr><td>3.00</td><td>4.494</td><td>3.376</td><td>2.303</td></tr> <tr><td>4.50</td><td>6.641</td><td>5.052</td><td>3.408</td></tr> <tr><td>6.00</td><td>8.951</td><td>6.681</td><td>4.518</td></tr> <tr><td>7.50</td><td>11.158</td><td>8.420</td><td>5.655</td></tr> <tr><td>8.40</td><td>12.611</td><td>9.479</td><td>6.345</td></tr> <tr><td>9.24</td><td>14.017</td><td>10.407</td><td>7.005</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Load Current [A]	Input Current [A]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	0.164	0.107	0.079	1.50	2.311	1.757	1.206	3.00	4.494	3.376	2.303	4.50	6.641	5.052	3.408	6.00	8.951	6.681	4.518	7.50	11.158	8.420	5.655	8.40	12.611	9.479	6.345	9.24	14.017	10.407	7.005	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Current [A]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	0.164	0.107	0.079																																																			
1.50	2.311	1.757	1.206																																																			
3.00	4.494	3.376	2.303																																																			
4.50	6.641	5.052	3.408																																																			
6.00	8.951	6.681	4.518																																																			
7.50	11.158	8.420	5.655																																																			
8.40	12.611	9.479	6.345																																																			
9.24	14.017	10.407	7.005																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			


Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	CBS2002424																																																						
Item	Input Power (by Load Current) 入力電力 (負荷特性)	Temperature 25°C Testing Circuitry Figure A																																																					
Object	—																																																						
1. Graph	<p>—△— Input Volt. 18V        - - □ - - Input Volt. 24V        - - ○ - - Input Volt. 36V</p>																																																						
2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td><td>3.0</td><td>2.6</td><td>2.8</td></tr> <tr> <td>1.50</td><td>41.6</td><td>42.3</td><td>43.3</td></tr> <tr> <td>3.00</td><td>80.2</td><td>80.9</td><td>82.6</td></tr> <tr> <td>4.50</td><td>119.7</td><td>120.5</td><td>122.1</td></tr> <tr> <td>6.00</td><td>159.9</td><td>160.6</td><td>162.9</td></tr> <tr> <td>7.50</td><td>201.2</td><td>201.4</td><td>203.4</td></tr> <tr> <td>8.40</td><td>226.3</td><td>226.3</td><td>227.9</td></tr> <tr> <td>9.24</td><td>250.3</td><td>249.7</td><td>251.4</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr> <td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>				Load Current [A]	Input Power [W]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	3.0	2.6	2.8	1.50	41.6	42.3	43.3	3.00	80.2	80.9	82.6	4.50	119.7	120.5	122.1	6.00	159.9	160.6	162.9	7.50	201.2	201.4	203.4	8.40	226.3	226.3	227.9	9.24	250.3	249.7	251.4	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Input Power [W]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
0.00	3.0	2.6	2.8																																																				
1.50	41.6	42.3	43.3																																																				
3.00	80.2	80.9	82.6																																																				
4.50	119.7	120.5	122.1																																																				
6.00	159.9	160.6	162.9																																																				
7.50	201.2	201.4	203.4																																																				
8.40	226.3	226.3	227.9																																																				
9.24	250.3	249.7	251.4																																																				
—	—	—	—																																																				
—	—	—	—																																																				
—	—	—	—																																																				
Note:	Slanted line shows the range of the rated load current.																																																						
(注)	斜線は定格負荷電流範囲を示す。																																																						

COSEL

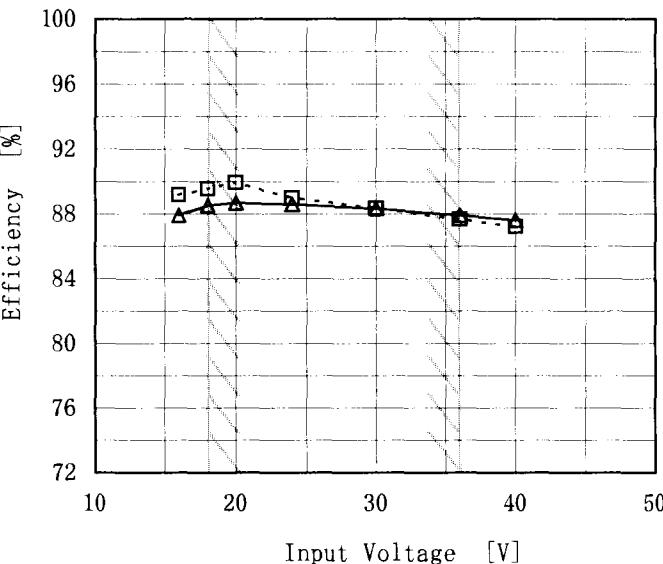Model	CBS2002424	Temperature	25°C																																
Item	Efficiency (by Input Voltage) 効率(入力電圧特性)	Testing Circuitry	Figure A																																
Object																																			
1. Graph																																			
	<p style="text-align: center;"> <span style="display: inline-block; width: 1em; height: 1em; border: 1px dashed black; vertical-align: middle;"></span> Load 50%  <span style="display: inline-block; width: 1em; height: 1em; border: 1px solid black; vertical-align: middle;"></span> Load 100%         </p> 																																		
2. Values																																			
	<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>16</td><td>89.2</td><td>87.9</td></tr> <tr><td>18</td><td>89.6</td><td>88.5</td></tr> <tr><td>20</td><td>89.9</td><td>88.7</td></tr> <tr><td>24</td><td>89.0</td><td>88.6</td></tr> <tr><td>30</td><td>88.4</td><td>88.3</td></tr> <tr><td>36</td><td>87.7</td><td>87.9</td></tr> <tr><td>40</td><td>87.2</td><td>87.6</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>			Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	16	89.2	87.9	18	89.6	88.5	20	89.9	88.7	24	89.0	88.6	30	88.4	88.3	36	87.7	87.9	40	87.2	87.6	—	—	—	—	—	—
Input Voltage [V]	Efficiency [%]																																		
	Load 50%	Load 100%																																	
16	89.2	87.9																																	
18	89.6	88.5																																	
20	89.9	88.7																																	
24	89.0	88.6																																	
30	88.4	88.3																																	
36	87.7	87.9																																	
40	87.2	87.6																																	
—	—	—																																	
—	—	—																																	
Note: Slanted line shows the range of the rated input voltage.																																			
(注) 斜線は定格入力電圧範囲を示す。																																			


COSEL

Model	CBS2002424	Temperature	25°C																																																			
Item	Efficiency (by Load Current) 効率(負荷特性)	Testing Circuitry	Figure A																																																			
Object	_____																																																					
1. Graph	—▲— Input Volt. 18V - - - □ - - Input Volt. 24V - - ○ - - Input Volt. 36V																																																					
	<p>Efficiency [%]</p> <p>Load Current [A]</p>	2. Values	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr><td>0.00</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>1.50</td><td>85.7</td><td>83.8</td><td>81.3</td></tr> <tr><td>3.00</td><td>89.4</td><td>88.4</td><td>86.3</td></tr> <tr><td>4.50</td><td>89.7</td><td>89.2</td><td>87.9</td></tr> <tr><td>6.00</td><td>89.6</td><td>89.2</td><td>88.0</td></tr> <tr><td>7.50</td><td>89.0</td><td>89.0</td><td>88.1</td></tr> <tr><td>8.40</td><td>88.6</td><td>88.7</td><td>88.0</td></tr> <tr><td>9.24</td><td>88.0</td><td>88.4</td><td>87.8</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	—	—	—	1.50	85.7	83.8	81.3	3.00	89.4	88.4	86.3	4.50	89.7	89.2	87.9	6.00	89.6	89.2	88.0	7.50	89.0	89.0	88.1	8.40	88.6	88.7	88.0	9.24	88.0	88.4	87.8	—	—	—	—	—	—	—	—	—	—	—	—
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																			
0.00	—	—	—																																																			
1.50	85.7	83.8	81.3																																																			
3.00	89.4	88.4	86.3																																																			
4.50	89.7	89.2	87.9																																																			
6.00	89.6	89.2	88.0																																																			
7.50	89.0	89.0	88.1																																																			
8.40	88.6	88.7	88.0																																																			
9.24	88.0	88.4	87.8																																																			
—	—	—	—																																																			
—	—	—	—																																																			
—	—	—	—																																																			

Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

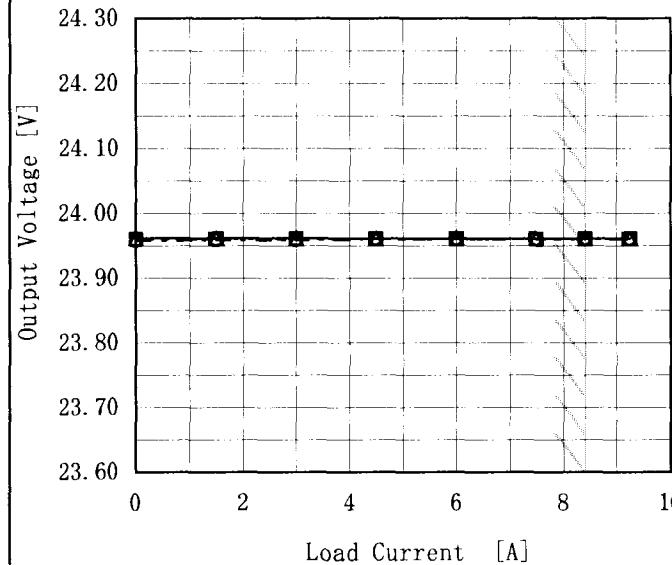Model	CBS2002424	Temperature	25°C																																															
Item	Load Regulation 静的負荷変動	Testing Circuitry	Figure A																																															
Object	+24V8.4A	2. Values																																																
1. Graph	<p>—△— Input Volt. 18V        - - -□- Input Volt. 24V        - - -○- Input Volt. 36V</p> 																																																	
	<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>0.00</td> <td>23.962</td> <td>23.960</td> <td>23.958</td> </tr> <tr> <td>1.50</td> <td>23.962</td> <td>23.960</td> <td>23.959</td> </tr> <tr> <td>3.00</td> <td>23.962</td> <td>23.960</td> <td>23.959</td> </tr> <tr> <td>4.50</td> <td>23.961</td> <td>23.960</td> <td>23.960</td> </tr> <tr> <td>6.00</td> <td>23.961</td> <td>23.960</td> <td>23.960</td> </tr> <tr> <td>7.50</td> <td>23.961</td> <td>23.960</td> <td>23.960</td> </tr> <tr> <td>8.40</td> <td>23.961</td> <td>23.960</td> <td>23.960</td> </tr> <tr> <td>9.24</td> <td>23.961</td> <td>23.960</td> <td>23.960</td> </tr> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> <tr> <td>--</td> <td>--</td> <td>--</td> <td>--</td> </tr> </tbody> </table>			Load Current [A]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	0.00	23.962	23.960	23.958	1.50	23.962	23.960	23.959	3.00	23.962	23.960	23.959	4.50	23.961	23.960	23.960	6.00	23.961	23.960	23.960	7.50	23.961	23.960	23.960	8.40	23.961	23.960	23.960	9.24	23.961	23.960	23.960	--	--	--	--	--	--	--	--
Load Current [A]	Output Voltage [V]																																																	
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																															
0.00	23.962	23.960	23.958																																															
1.50	23.962	23.960	23.959																																															
3.00	23.962	23.960	23.959																																															
4.50	23.961	23.960	23.960																																															
6.00	23.961	23.960	23.960																																															
7.50	23.961	23.960	23.960																																															
8.40	23.961	23.960	23.960																																															
9.24	23.961	23.960	23.960																																															
--	--	--	--																																															
--	--	--	--																																															


Note: Slanted line shows the range of the rated load current.

(注) 斜線は定格負荷電流範囲を示す。

**COSEL**

Model	CBS2002424
Item	Ripple Voltage (by Load Current) リップル電圧 (負荷特性)
Object	+24V8.4A

## 1. Graph

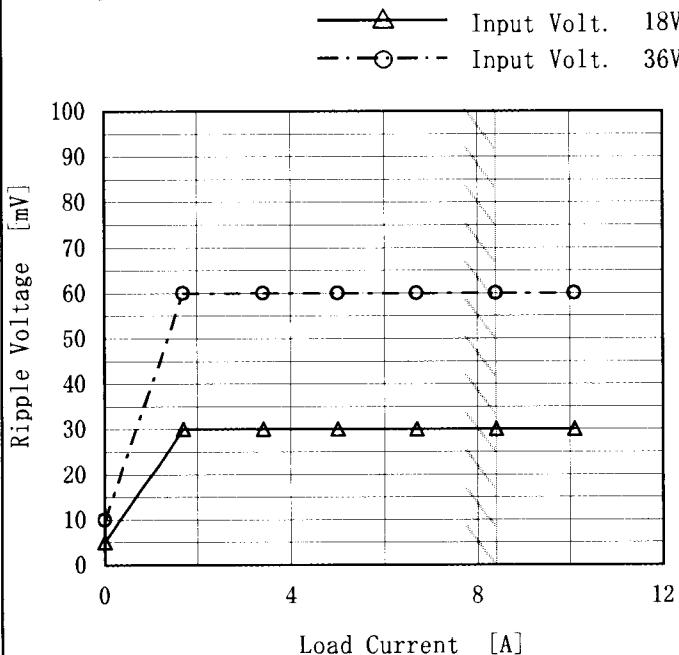

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p - p 値で示される。  
(注) 斜線は定格負荷電流範囲を示す。

Ripple [mVp-p]

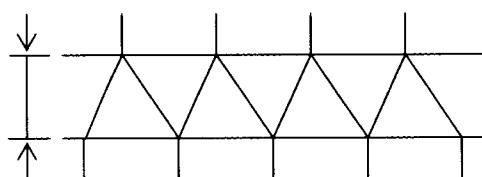


Fig. Complex Ripple Wave Form  
図 リップル波形詳細図

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Load Current [A]	Ripple Voltage [mV]	
	Input Volt. 18 [V]	Input Volt. 36 [V]
0.0	5	10
1.7	30	60
3.4	30	60
5.0	30	60
6.7	30	60
8.4	30	60
10.1	30	60
--	--	--
--	--	--
--	--	--
--	--	--

**COSEL**

Model	CBS2002424	Temperature	25°C																							
Item	Ripple-Noise リップルノイズ	Testing Circuitry	Figure A																							
Object	+24V8.4A	2. Values																								
1. Graph																										
<table border="1"> <thead> <tr> <th>Load Current [A]</th> <th>Ripple-Noise [mV] (18V)</th> <th>Ripple-Noise [mV] (36V)</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>15</td><td>40</td></tr> <tr><td>1.7</td><td>50</td><td>80</td></tr> <tr><td>3.4</td><td>50</td><td>80</td></tr> <tr><td>5.0</td><td>50</td><td>75</td></tr> <tr><td>6.7</td><td>45</td><td>75</td></tr> <tr><td>8.4</td><td>45</td><td>80</td></tr> <tr><td>10.1</td><td>50</td><td>85</td></tr> </tbody> </table>			Load Current [A]	Ripple-Noise [mV] (18V)	Ripple-Noise [mV] (36V)	0.0	15	40	1.7	50	80	3.4	50	80	5.0	50	75	6.7	45	75	8.4	45	80	10.1	50	85
Load Current [A]	Ripple-Noise [mV] (18V)	Ripple-Noise [mV] (36V)																								
0.0	15	40																								
1.7	50	80																								
3.4	50	80																								
5.0	50	75																								
6.7	45	75																								
8.4	45	80																								
10.1	50	85																								
<p>Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p> <p>リップルノイズは、下図 p - p 値で示される。 (注) 斜線は定格負荷電流範囲を示す。</p> <p>Fig. Complex Ripple Noise Wave Form 図 リップルノイズ波形</p>																										

**COSEL**

Model	CBS2002424
Item	Overcurrent Protection 過電流保護
Object	+24V8.4A

1. Graph

Input Volt.	18V	24V	36V
Output Voltage [V]	24.0	22.8	21.6
Load Current [A]	8.0	11.13	11.24

Note: Slanted line shows the range of the rated load current.  
(注) 斜線は定格負荷電流範囲を示す。

Intermittent operation occurs when the output voltage is from 14.4V to 0V.  
14.4V~0V間は、間欠モードとなる。

Temperature 25°C  
Testing Circuitry Figure A

## 2. Values

Output Voltage [V]	Load Current [A]		
	18[V]	24[V]	36[V]
24.0	0.00	0.00	0.00
22.8	11.13	11.08	11.24
21.6	11.24	11.12	11.41
19.2	11.26	11.19	11.53
16.8	11.28	11.28	11.67
14.4	11.30	11.40	11.99
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--
--	--	--	--

COSEL

Model	CBS2002424
Item	Overvoltage Protection 過電圧保護
Object	+24V8.4A
1. Graph	
<p>Operating Point [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 0%</p>	

Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]
-50	31.46	31.46	31.46
-40	31.53	31.53	31.53
-20	31.46	31.46	31.46
0	31.46	31.46	31.46
25	31.46	31.46	31.46
40	31.46	31.46	31.46
60	31.39	31.39	31.39
85	31.32	31.32	31.32
100	31.25	31.25	31.25
105	31.25	31.25	31.25
—	—	—	—

Note: Slanted line shows the range of the rated ambient temperature.


(注) 斜線は定格周囲温度範囲を示す。

**COSEL**

Model	CBS2002424	Temperature	25°C
Item	Dynamic Load Response 動的負荷變動	Testing Circuitry	Figure A
Object	+24V8.4A		

Input Volt. 24 V

Cycle 1000 ms





Min. Load (0A) ↔

Load 100% (8.4A)

500 mV/div

500 μ s/div

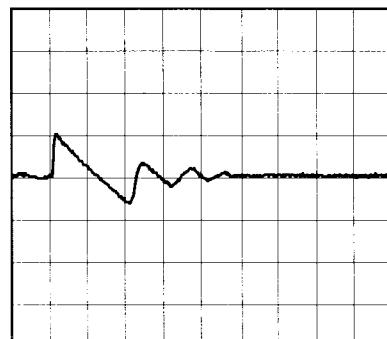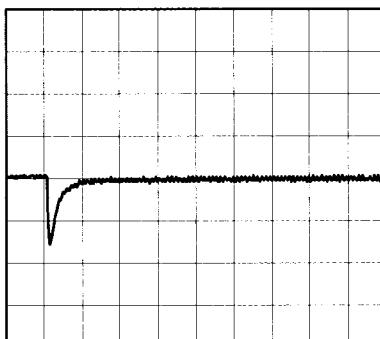



5 ms/div

Min. Load (0A) ↔

Load 50% (4.2A)

500 mV/div

500 μ s/div

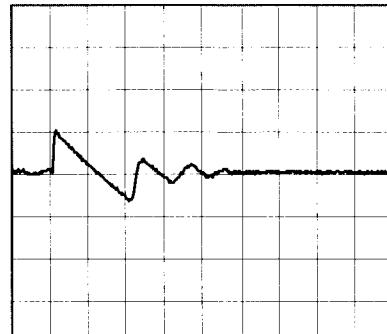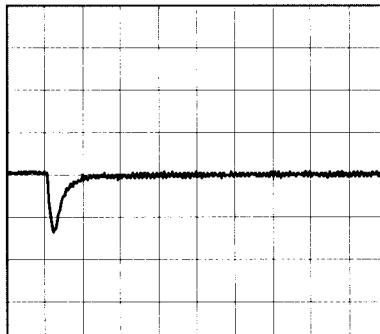



5 ms/div

Load 10% (0.84A) ↔

Load 100% (8.4A)

500 mV/div

500 μ s/div

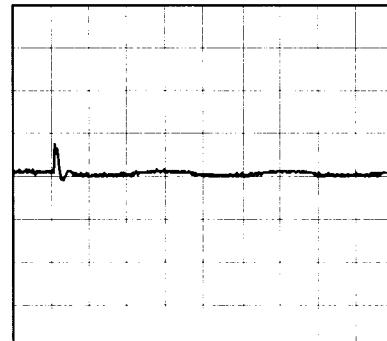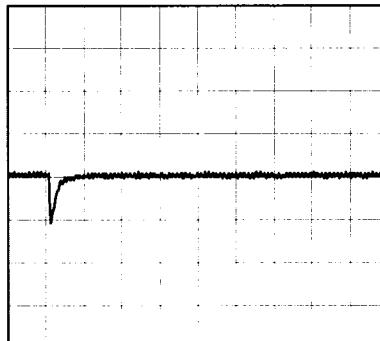

5 ms/div

**COSEL**

Model	CBS2002424	Temperature	25°C			
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A			
Object	+24V8.4A					
1. Graph						
Load 50%	Output Volt. [5V/div]	Input Volt. 18 V				
Load 100%	Output Volt. [5V/div]					
Input Volt. [10V/div]		Time [50ms/div]	Time [10ms/div]			
2. Values [mS]						
Load	Time	T <sub>d</sub>	T <sub>r</sub>	T <sub>s</sub>	T <sub>h</sub>	T <sub>f</sub>
50 %		15.5	5.8	21.3	0.3	6.5
100 %		15.5	5.8	21.3	0.2	3.4

**COSEL**

Model	CBS2002424	Testing Circuitry      Figure A																																																					
Item	Ambient Temperature Drift 周囲温度変動																																																						
Object	+24V8.4A	2. Values																																																					
1. Graph	<p>—△— Input Volt. 18V      - - -□- Input Volt. 24V      - - ○- Input Volt. 36V</p> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p>	<table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 18[V]</th> <th>Input Volt. 24[V]</th> <th>Input Volt. 36[V]</th> </tr> </thead> <tbody> <tr> <td>-50</td> <td>23.919</td> <td>23.921</td> <td>23.923</td> </tr> <tr> <td>-40</td> <td>23.934</td> <td>23.935</td> <td>23.938</td> </tr> <tr> <td>-20</td> <td>23.954</td> <td>23.955</td> <td>23.957</td> </tr> <tr> <td>0</td> <td>23.971</td> <td>23.972</td> <td>23.974</td> </tr> <tr> <td>25</td> <td>23.976</td> <td>23.976</td> <td>23.977</td> </tr> <tr> <td>40</td> <td>23.969</td> <td>23.968</td> <td>23.968</td> </tr> <tr> <td>60</td> <td>23.949</td> <td>23.949</td> <td>23.949</td> </tr> <tr> <td>85</td> <td>23.918</td> <td>23.919</td> <td>23.919</td> </tr> <tr> <td>100</td> <td>23.897</td> <td>23.896</td> <td>23.896</td> </tr> <tr> <td>105</td> <td>23.884</td> <td>23.885</td> <td>23.886</td> </tr> <tr> <td>--</td> <td>—</td> <td>—</td> <td>—</td> </tr> </tbody> </table>			Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]	-50	23.919	23.921	23.923	-40	23.934	23.935	23.938	-20	23.954	23.955	23.957	0	23.971	23.972	23.974	25	23.976	23.976	23.977	40	23.969	23.968	23.968	60	23.949	23.949	23.949	85	23.918	23.919	23.919	100	23.897	23.896	23.896	105	23.884	23.885	23.886	--	—	—	—
Ambient Temperature [°C]	Output Voltage [V]																																																						
	Input Volt. 18[V]	Input Volt. 24[V]	Input Volt. 36[V]																																																				
-50	23.919	23.921	23.923																																																				
-40	23.934	23.935	23.938																																																				
-20	23.954	23.955	23.957																																																				
0	23.971	23.972	23.974																																																				
25	23.976	23.976	23.977																																																				
40	23.969	23.968	23.968																																																				
60	23.949	23.949	23.949																																																				
85	23.918	23.919	23.919																																																				
100	23.897	23.896	23.896																																																				
105	23.884	23.885	23.886																																																				
--	—	—	—																																																				

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

**COSEL**

Model	CBS2002424			
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	Testing Circuitry Figure A		
Object	+24V8.4A			
1. Graph				
		2. Values		
		Ambient Temperature [°C]	Input Voltage [V]	
			Load 50%	Load 100%
-50	13.8	14.3		
-40	13.8	14.4		
-20	13.9	14.5		
0	13.9	14.5		
25	14.0	14.6		
40	14.0	14.6		
60	14.0	14.6		
85	13.9	14.6		
100	13.9	14.6		
105	13.9	14.7		
--	--	--		


Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

**COSEL**

Model	CBS2002424
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)
Object	+24V8.4A

## 1. Graph

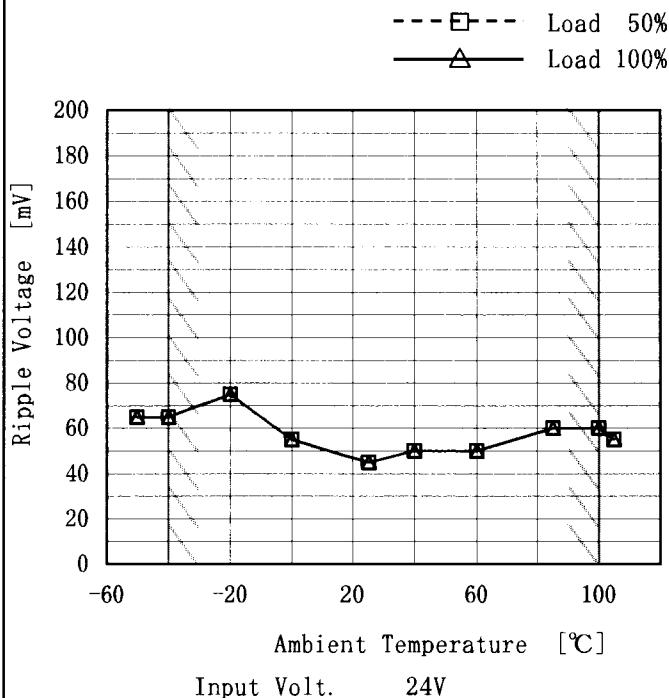

Note: Slanted line shows the range of the rated ambient temperature.


(注) 斜線は定格周囲温度範囲を示す。

Testing Circuitry Figure A

## 2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	65	65
-40	65	65
-20	75	75
0	55	55
25	45	45
40	50	50
60	50	50
85	60	60
100	60	60
105	55	55
--	--	--

**COSEL**

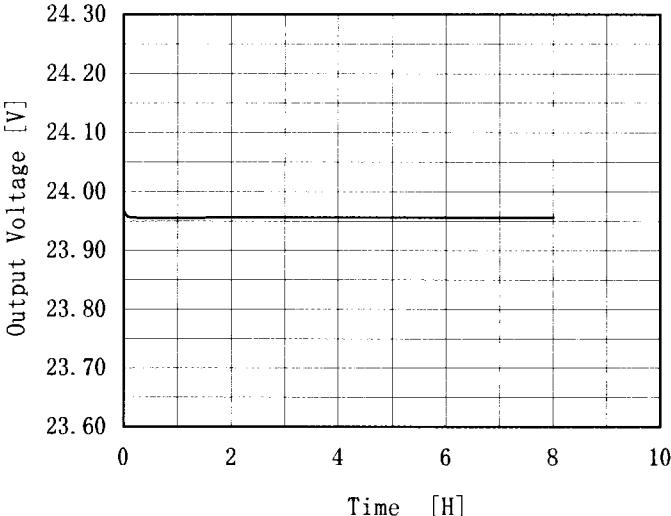Model	CBS2002424	Temperature	25°C																						
Item	Time Lapse Drift 経時ドリフト	Testing Circuitry	Figure A																						
Object	+24V8.4A																								
1. Graph																									
 <p>Output Voltage [V]</p> <p>Time [H]</p> <p>Input Volt. 24V Load 100%</p>			2. Values																						
<table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>23.968</td></tr> <tr><td>0.5</td><td>23.955</td></tr> <tr><td>1.0</td><td>23.955</td></tr> <tr><td>2.0</td><td>23.956</td></tr> <tr><td>3.0</td><td>23.956</td></tr> <tr><td>4.0</td><td>23.956</td></tr> <tr><td>5.0</td><td>23.956</td></tr> <tr><td>6.0</td><td>23.956</td></tr> <tr><td>7.0</td><td>23.956</td></tr> <tr><td>8.0</td><td>23.956</td></tr> </tbody> </table>			Time since start [H]	Output Voltage [V]	0.0	23.968	0.5	23.955	1.0	23.955	2.0	23.956	3.0	23.956	4.0	23.956	5.0	23.956	6.0	23.956	7.0	23.956	8.0	23.956	
Time since start [H]	Output Voltage [V]																								
0.0	23.968																								
0.5	23.955																								
1.0	23.955																								
2.0	23.956																								
3.0	23.956																								
4.0	23.956																								
5.0	23.956																								
6.0	23.956																								
7.0	23.956																								
8.0	23.956																								



Model	CBS2002424	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+24V 8.4A	

### 1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 ~ 100°C

Input Voltage : 18 ~ 36V

Load Current : 0 ~ 8.4A

\* Output Voltage Accuracy = ±(Maximum of Output Voltage - Minimum of Output Voltage) / 2

$$* \text{ Output Voltage Accuracy (Ration)} = \frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$$

### 1. 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -40 ~ 100°C

入力電圧 : 18 ~ 36V

負荷電流 : 0 ~ 8.4A

\* 定電圧精度(変動値) = ±(出力電圧の最高値 - 出力電圧の最低値) / 2

$$* \text{ 定電圧精度(変動率)} = \frac{\text{変動値}}{\text{定格出力電圧}} \times 100$$

### 2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	25	36	8.4	23.976		
Minimum Voltage	100	24	0	23.887	±45	±0.2



Model	CBS2002424	
Item	Condense 結露特性	Testing Circuitry      Figure A
Object	+24V8.4A	

### 1. Condensation test

Testing procedure is as follows.

- ① Keeping and cooling the unit in a tank at -10°C for an hour with the input off.
- ② Taking it out of the tank and dewing itself in a room where the temperature is 25°C and the humidity is 40%RH.
- ③ Testing electrical characteristics of the unit to confirm there be no fault.

### 1. 結露特性試験

入力を切った状態で、恒温槽で-10°Cに冷却しておき、約1時間後に恒温槽から取り出し、室温25°C、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い異常のないことを確認する。

### 2. Values

Item	Data	Testing Conditions
Output Voltage [V]	23.957	Input Volt.:24V, Load Current.:8.4A
Line Regulation [mV]	1	Input Volt.:18~36V, Load Current.:8.4A
Load Regulation [mV]	1	Input Volt.:24V, Load Current.:0~8.4A

**COSEL**

Model	CBS2002424	Temperature	25°C
Item	Line Noise Tolerance 入力雑音耐量	Testing Circuitry	Figure B
Object	+24V8.4A		

## 1. Conditions

- Input Voltage : 24 V
- Pulse Input Duration : 1 min. or more
- Pulse Voltage : 2000 V
- Load : 100 %
- Pulse Cycle : 16.7 mS

## 2. Results

Pulse Width [nS]	MODE		No protection failure should occur	DC-like Regulation of Output Voltage
	POLARITY		保護回路の誤動作がない	出力電圧の直流的変動
50	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation
1000	COMMON	+	OK	no fluctuation
		-	OK	no fluctuation
	NORMAL	+	OK	no fluctuation
		-	OK	no fluctuation

COSEL

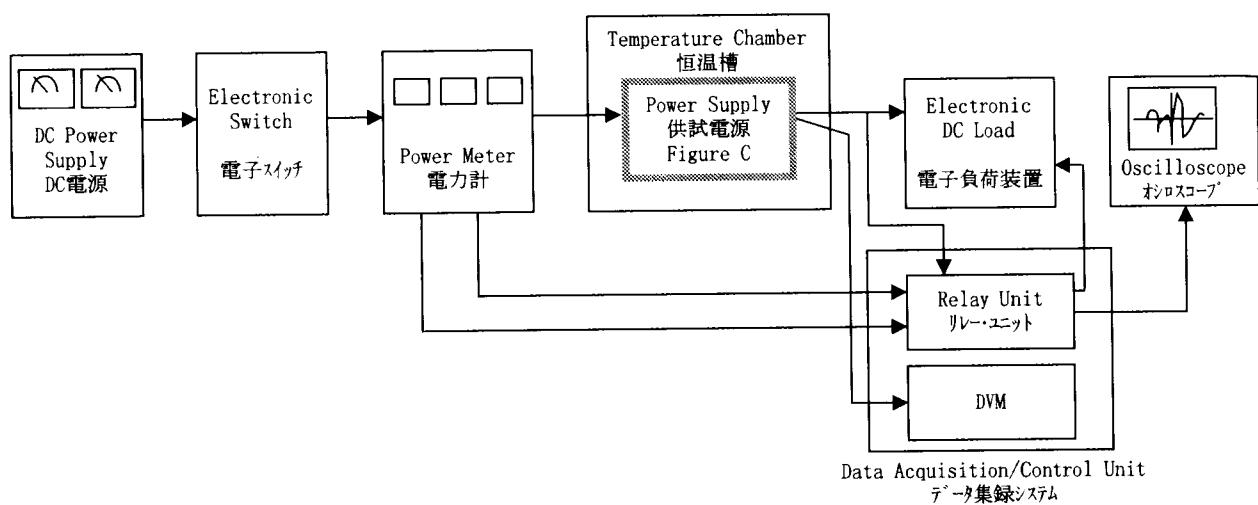


Figure A

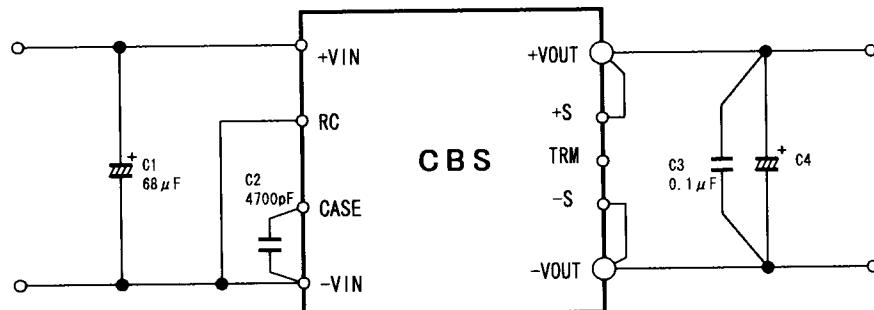
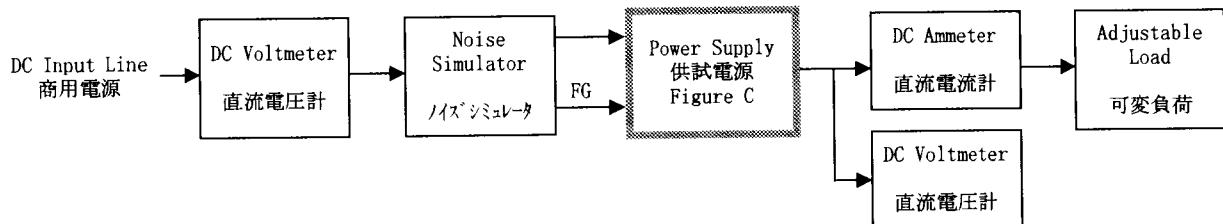


Figure C