

TEST DATA OF CBS3504812

Regulated DC Power Supply
Dec.16. 2004

Approved by : *Kazuyoshi Shimano*
Kazuyoshi Shimano Design Manager

Prepared by : *Kiyokazu Tajima*
Kiyokazu Tajima Design Engineer

COSEL CO.,LTD.



CONTENTS

1. Input Current (by Input Voltage)	1
2. Input Current (by Load Current)	2
3. Input Power (by Load Current)	3
4. Efficiency (by Input Voltage)	4
5. Efficiency (by Load Current)	5
6. Line Regulation	6
7. Load Regulation	7
8. Dynamic Load Response	8
9. Ripple Voltage (by Load Current)	9
10. Ripple-Noise	10
11. Ripple Voltage (by Ambient Temperature)	11
12. Ambient Temperature Drift	12
13. Output Voltage Accuracy	13
14. Time Lapse Drift	14
15. Rise and Fall Time	15
16. Minimum Input Voltage for Regulated Output Voltage	16
17. Overcurrent Protection	17
18. Overvoltage Protection	18
19. Figure of Testing Circuitry	19

(Final Page 19)



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																																							
Item	Input Current (by Input Voltage)																																																																								
Object	_____																																																																								
1. Graph <div style="float: right;"> —△— Load 100% - - - □ - - Load 50% - · - ○ - · - Load 0% </div> <p style="margin-top: 10px;">Note: Slanted line shows the range of the rated input voltage.</p>		2. Values <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Load 0%</th> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.000</td><td>0.000</td><td>0.000</td></tr> <tr><td>25.0</td><td>0.008</td><td>0.007</td><td>0.011</td></tr> <tr><td>30.0</td><td>0.005</td><td>0.009</td><td>0.008</td></tr> <tr><td>33.0</td><td>0.057</td><td>5.851</td><td>11.674</td></tr> <tr><td>36.0</td><td>0.053</td><td>5.361</td><td>10.895</td></tr> <tr><td>40.0</td><td>0.051</td><td>4.830</td><td>9.821</td></tr> <tr><td>48.0</td><td>0.042</td><td>4.033</td><td>8.174</td></tr> <tr><td>54.0</td><td>0.038</td><td>3.594</td><td>7.270</td></tr> <tr><td>60.0</td><td>0.030</td><td>3.240</td><td>6.552</td></tr> <tr><td>68.0</td><td>0.033</td><td>2.870</td><td>5.808</td></tr> <tr><td>76.0</td><td>0.024</td><td>2.581</td><td>5.202</td></tr> <tr><td>80.0</td><td>0.030</td><td>2.456</td><td>4.948</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Input Voltage [V]	Input Current [A]			Load 0%	Load 50%	Load 100%	0	0.000	0.000	0.000	25.0	0.008	0.007	0.011	30.0	0.005	0.009	0.008	33.0	0.057	5.851	11.674	36.0	0.053	5.361	10.895	40.0	0.051	4.830	9.821	48.0	0.042	4.033	8.174	54.0	0.038	3.594	7.270	60.0	0.030	3.240	6.552	68.0	0.033	2.870	5.808	76.0	0.024	2.581	5.202	80.0	0.030	2.456	4.948	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Input Voltage [V]	Input Current [A]																																																																								
	Load 0%	Load 50%	Load 100%																																																																						
0	0.000	0.000	0.000																																																																						
25.0	0.008	0.007	0.011																																																																						
30.0	0.005	0.009	0.008																																																																						
33.0	0.057	5.851	11.674																																																																						
36.0	0.053	5.361	10.895																																																																						
40.0	0.051	4.830	9.821																																																																						
48.0	0.042	4.033	8.174																																																																						
54.0	0.038	3.594	7.270																																																																						
60.0	0.030	3.240	6.552																																																																						
68.0	0.033	2.870	5.808																																																																						
76.0	0.024	2.581	5.202																																																																						
80.0	0.030	2.456	4.948																																																																						
-	-	-	-																																																																						
-	-	-	-																																																																						
-	-	-	-																																																																						
-	-	-	-																																																																						



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																			
Item	Input Current (by Load Current)																																																				
Object		2.Values																																																			
1.Graph																																																					
<p> —△— Input Volt. 36V - - □ - - Input Volt. 48V - · ○ - · Input Volt. 76V </p> <p> Input Current [A] Load Current [A] </p>																																																					
<p>Note: Slanted line shows the range of the rated load current.</p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>0.052</td><td>0.042</td><td>0.030</td></tr> <tr><td>4.0</td><td>1.478</td><td>1.121</td><td>0.751</td></tr> <tr><td>8.0</td><td>2.910</td><td>2.216</td><td>1.437</td></tr> <tr><td>12.0</td><td>4.386</td><td>3.313</td><td>2.127</td></tr> <tr><td>16.0</td><td>5.914</td><td>4.432</td><td>2.830</td></tr> <tr><td>20.0</td><td>7.406</td><td>5.578</td><td>3.548</td></tr> <tr><td>24.0</td><td>8.963</td><td>6.706</td><td>4.270</td></tr> <tr><td>28.0</td><td>10.538</td><td>7.873</td><td>5.004</td></tr> <tr><td>29.0</td><td>10.885</td><td>8.174</td><td>5.175</td></tr> <tr><td>31.9</td><td>12.049</td><td>9.030</td><td>5.718</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Input Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	0.052	0.042	0.030	4.0	1.478	1.121	0.751	8.0	2.910	2.216	1.437	12.0	4.386	3.313	2.127	16.0	5.914	4.432	2.830	20.0	7.406	5.578	3.548	24.0	8.963	6.706	4.270	28.0	10.538	7.873	5.004	29.0	10.885	8.174	5.175	31.9	12.049	9.030	5.718	-	-	-	-
Load Current [A]	Input Current [A]																																																				
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																		
0.0	0.052	0.042	0.030																																																		
4.0	1.478	1.121	0.751																																																		
8.0	2.910	2.216	1.437																																																		
12.0	4.386	3.313	2.127																																																		
16.0	5.914	4.432	2.830																																																		
20.0	7.406	5.578	3.548																																																		
24.0	8.963	6.706	4.270																																																		
28.0	10.538	7.873	5.004																																																		
29.0	10.885	8.174	5.175																																																		
31.9	12.049	9.030	5.718																																																		
-	-	-	-																																																		



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																				
Item Input Power (by Load Current)																																																						
Object _____																																																						
1. Graph		2. Values																																																				
<p> —△— Input Volt. 36V - - - □ - - - Input Volt. 48V - · - ○ - · - - Input Volt. 76V </p> <p> Note: Slanted line shows the range of the rated load current. </p>		<table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Input Power [W]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>1.9</td><td>2.0</td><td>2.3</td></tr> <tr><td>4.0</td><td>53.3</td><td>53.8</td><td>57.1</td></tr> <tr><td>8.0</td><td>104.8</td><td>106.2</td><td>109.2</td></tr> <tr><td>12.0</td><td>157.6</td><td>158.6</td><td>161.5</td></tr> <tr><td>16.0</td><td>211.1</td><td>212.0</td><td>214.8</td></tr> <tr><td>20.0</td><td>266.1</td><td>266.6</td><td>269.2</td></tr> <tr><td>24.0</td><td>321.4</td><td>321.6</td><td>323.8</td></tr> <tr><td>28.0</td><td>377.4</td><td>377.2</td><td>379.3</td></tr> <tr><td>29.0</td><td>391.7</td><td>391.5</td><td>393.1</td></tr> <tr><td>31.9</td><td>432.9</td><td>432.3</td><td>434.3</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	1.9	2.0	2.3	4.0	53.3	53.8	57.1	8.0	104.8	106.2	109.2	12.0	157.6	158.6	161.5	16.0	211.1	212.0	214.8	20.0	266.1	266.6	269.2	24.0	321.4	321.6	323.8	28.0	377.4	377.2	379.3	29.0	391.7	391.5	393.1	31.9	432.9	432.3	434.3	-	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.0	1.9	2.0	2.3																																																			
4.0	53.3	53.8	57.1																																																			
8.0	104.8	106.2	109.2																																																			
12.0	157.6	158.6	161.5																																																			
16.0	211.1	212.0	214.8																																																			
20.0	266.1	266.6	269.2																																																			
24.0	321.4	321.6	323.8																																																			
28.0	377.4	377.2	379.3																																																			
29.0	391.7	391.5	393.1																																																			
31.9	432.9	432.3	434.3																																																			
-	-	-	-																																																			



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																
Item Efficiency (by Input Voltage)																																		
Object _____																																		
1. Graph		2. Values																																
<p> ---□--- Load 50% —△— Load 100% </p> <p> Efficiency [%] 100 96 92 88 84 80 76 72 20 40 60 80 Input Voltage [V] </p> <p> Note: Slanted line shows the range of the rated input voltage. </p>																																		
		<table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Efficiency [%]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>90.2</td><td>87.9</td></tr> <tr><td>36</td><td>90.2</td><td>88.1</td></tr> <tr><td>40</td><td>90.1</td><td>88.1</td></tr> <tr><td>48</td><td>89.7</td><td>88.1</td></tr> <tr><td>55</td><td>89.4</td><td>88.0</td></tr> <tr><td>60</td><td>89.2</td><td>88.0</td></tr> <tr><td>70</td><td>88.7</td><td>87.7</td></tr> <tr><td>76</td><td>88.5</td><td>87.6</td></tr> <tr><td>80</td><td>88.1</td><td>87.5</td></tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	33	90.2	87.9	36	90.2	88.1	40	90.1	88.1	48	89.7	88.1	55	89.4	88.0	60	89.2	88.0	70	88.7	87.7	76	88.5	87.6	80	88.1	87.5
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
33	90.2	87.9																																
36	90.2	88.1																																
40	90.1	88.1																																
48	89.7	88.1																																
55	89.4	88.0																																
60	89.2	88.0																																
70	88.7	87.7																																
76	88.5	87.6																																
80	88.1	87.5																																



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																			
Item	Efficiency (by Load Current)																																																				
Object	_____																																																				
<p>1. Graph</p> <p> —△— Input Volt. 36V - - - □ - - Input Volt. 48V - · - ○ - · - Input Volt. 76V </p> <p>Efficiency [%]</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Efficiency [%]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>4.0</td><td>88.9</td><td>88.1</td><td>83.0</td></tr> <tr><td>8.0</td><td>90.6</td><td>89.4</td><td>86.9</td></tr> <tr><td>12.0</td><td>90.4</td><td>89.8</td><td>88.2</td></tr> <tr><td>16.0</td><td>90.0</td><td>89.6</td><td>88.5</td></tr> <tr><td>20.0</td><td>89.4</td><td>89.2</td><td>88.4</td></tr> <tr><td>24.0</td><td>88.8</td><td>88.8</td><td>88.1</td></tr> <tr><td>28.0</td><td>88.2</td><td>88.3</td><td>87.8</td></tr> <tr><td>29.0</td><td>88.1</td><td>88.1</td><td>87.7</td></tr> <tr><td>31.9</td><td>87.6</td><td>87.7</td><td>87.3</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	-	-	-	4.0	88.9	88.1	83.0	8.0	90.6	89.4	86.9	12.0	90.4	89.8	88.2	16.0	90.0	89.6	88.5	20.0	89.4	89.2	88.4	24.0	88.8	88.8	88.1	28.0	88.2	88.3	87.8	29.0	88.1	88.1	87.7	31.9	87.6	87.7	87.3	--	-	-	-
Load Current [A]	Efficiency [%]																																																				
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																		
0.0	-	-	-																																																		
4.0	88.9	88.1	83.0																																																		
8.0	90.6	89.4	86.9																																																		
12.0	90.4	89.8	88.2																																																		
16.0	90.0	89.6	88.5																																																		
20.0	89.4	89.2	88.4																																																		
24.0	88.8	88.8	88.1																																																		
28.0	88.2	88.3	87.8																																																		
29.0	88.1	88.1	87.7																																																		
31.9	87.6	87.7	87.3																																																		
--	-	-	-																																																		
<p>Note: Slanted line shows the range of the rated load current.</p>																																																					



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																
Item	Line Regulation																																	
Object	+12V29A																																	
1. Graph <div style="text-align: right;"> ---□--- Load 50% ---△--- Load 100% </div> <p style="text-align: center;">Input Voltage [V]</p>		2. Values <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th> <th colspan="2">Output Voltage [V]</th> </tr> <tr> <th>Load 50%</th> <th>Load 100%</th> </tr> </thead> <tbody> <tr><td>33</td><td>12.083</td><td>12.083</td></tr> <tr><td>36</td><td>12.083</td><td>12.083</td></tr> <tr><td>40</td><td>12.084</td><td>12.083</td></tr> <tr><td>48</td><td>12.083</td><td>12.083</td></tr> <tr><td>55</td><td>12.084</td><td>12.083</td></tr> <tr><td>60</td><td>12.084</td><td>12.082</td></tr> <tr><td>70</td><td>12.084</td><td>12.082</td></tr> <tr><td>76</td><td>12.084</td><td>12.082</td></tr> <tr><td>80</td><td>12.084</td><td>12.082</td></tr> </tbody> </table>	Input Voltage [V]	Output Voltage [V]		Load 50%	Load 100%	33	12.083	12.083	36	12.083	12.083	40	12.084	12.083	48	12.083	12.083	55	12.084	12.083	60	12.084	12.082	70	12.084	12.082	76	12.084	12.082	80	12.084	12.082
Input Voltage [V]	Output Voltage [V]																																	
	Load 50%	Load 100%																																
33	12.083	12.083																																
36	12.083	12.083																																
40	12.084	12.083																																
48	12.083	12.083																																
55	12.084	12.083																																
60	12.084	12.082																																
70	12.084	12.082																																
76	12.084	12.082																																
80	12.084	12.082																																
<p>Note: Slanted line shows the range of the rated input voltage.</p>																																		



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																			
Item	Load Regulation																																																				
Object	+12V29A																																																				
<p>1. Graph</p> <p> —△— Input Volt. 36V ---□--- Input Volt. 48V -·-○-·- Input Volt. 76V </p> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="3">Output Voltage [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>4.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>8.0</td><td>12.082</td><td>12.083</td><td>12.082</td></tr> <tr><td>12.0</td><td>12.082</td><td>12.083</td><td>12.082</td></tr> <tr><td>16.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>20.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>24.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>28.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>29.0</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>31.9</td><td>12.082</td><td>12.082</td><td>12.082</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.0	12.082	12.082	12.082	4.0	12.082	12.082	12.082	8.0	12.082	12.083	12.082	12.0	12.082	12.083	12.082	16.0	12.082	12.082	12.082	20.0	12.082	12.082	12.082	24.0	12.082	12.082	12.082	28.0	12.082	12.082	12.082	29.0	12.082	12.082	12.082	31.9	12.082	12.082	12.082	--	-	-	-
Load Current [A]	Output Voltage [V]																																																				
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																		
0.0	12.082	12.082	12.082																																																		
4.0	12.082	12.082	12.082																																																		
8.0	12.082	12.083	12.082																																																		
12.0	12.082	12.083	12.082																																																		
16.0	12.082	12.082	12.082																																																		
20.0	12.082	12.082	12.082																																																		
24.0	12.082	12.082	12.082																																																		
28.0	12.082	12.082	12.082																																																		
29.0	12.082	12.082	12.082																																																		
31.9	12.082	12.082	12.082																																																		
--	-	-	-																																																		





Model CBS3504812		Temperature 25°C Testing Circuitry Figure A
Item Dynamic Load Response		
Object +12V29A		

Input Volt. 48 V
Cycle 1000 ms



Load Current





Min. Load (0A) ↔
Load 100% (29A)

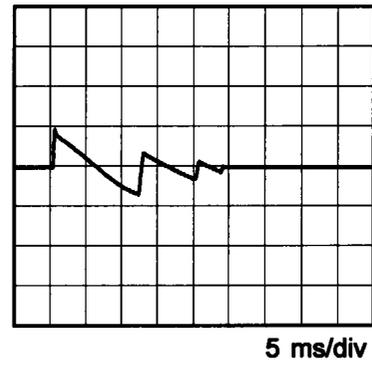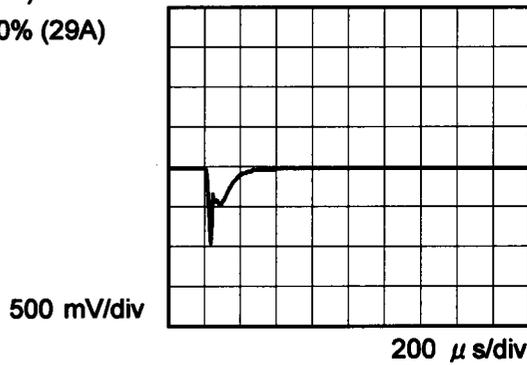

Min. Load (0A) ↔
Load 50% (14.5A)

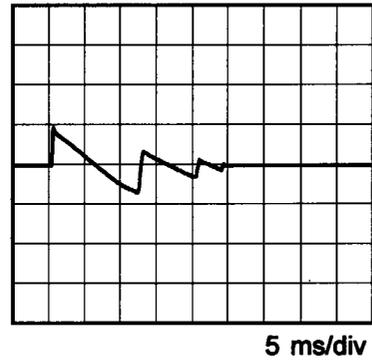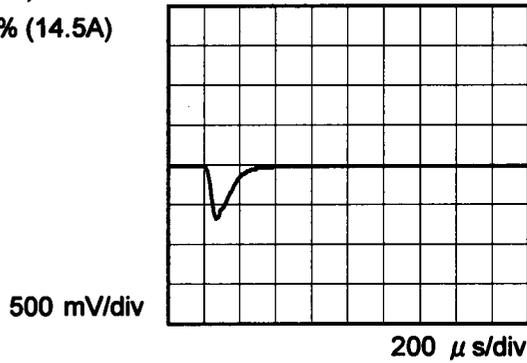

Load 10% (2.9A) ↔
Load 100% (29A)

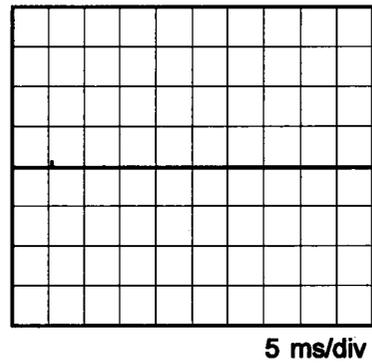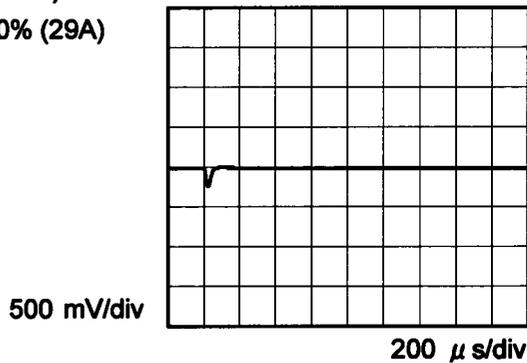




Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																						
Item	Ripple Voltage (by Load Current)																																							
Object	+12V29A																																							
<p>1. Graph</p> <p>—△— Input Volt. 36V - -○- - Input Volt. 76V</p> <p>Ripple Voltage [mV]</p> <p>Load Current [A]</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Current [A]</th> <th colspan="2">Ripple Voltage [mV]</th> </tr> <tr> <th>Input Volt. 36 [V]</th> <th>Input Volt. 76 [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>10</td><td>10</td></tr> <tr><td>4.0</td><td>10</td><td>15</td></tr> <tr><td>8.0</td><td>10</td><td>20</td></tr> <tr><td>12.0</td><td>15</td><td>20</td></tr> <tr><td>16.0</td><td>15</td><td>20</td></tr> <tr><td>20.0</td><td>15</td><td>25</td></tr> <tr><td>24.0</td><td>20</td><td>25</td></tr> <tr><td>28.0</td><td>25</td><td>25</td></tr> <tr><td>29.0</td><td>25</td><td>25</td></tr> <tr><td>31.9</td><td>25</td><td>25</td></tr> <tr><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Load Current [A]	Ripple Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.0	10	10	4.0	10	15	8.0	10	20	12.0	15	20	16.0	15	20	20.0	15	25	24.0	20	25	28.0	25	25	29.0	25	25	31.9	25	25	-	-	-
Load Current [A]	Ripple Voltage [mV]																																							
	Input Volt. 36 [V]	Input Volt. 76 [V]																																						
0.0	10	10																																						
4.0	10	15																																						
8.0	10	20																																						
12.0	15	20																																						
16.0	15	20																																						
20.0	15	25																																						
24.0	20	25																																						
28.0	25	25																																						
29.0	25	25																																						
31.9	25	25																																						
-	-	-																																						
<p>Measured by 100 MHz Oscilloscope. Ripple Voltage is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>																																								
<p>Ripple [mVp-p]</p> <p>Fig. Complex Ripple Wave Form</p>																																								



Model	CBS3504812
Item	Ripple-Noise
Object	+12V29A

Temperature 25°C
Testing Circuitry Figure A

1. Graph

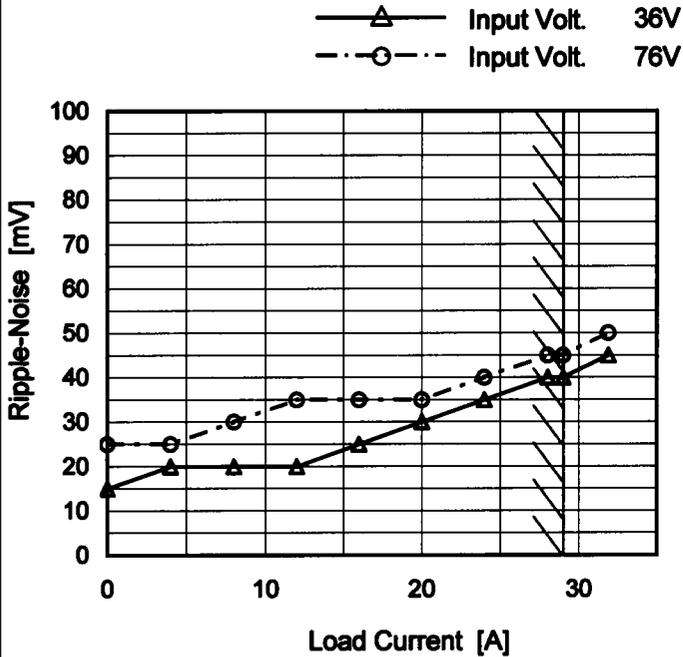

2. Values

Load Current [A]	Ripple-Noise [mV]	
	Input Volt. 36 [V]	Input Volt. 76 [V]
0.0	15	25
4.0	20	25
8.0	20	30
12.0	20	35
16.0	25	35
20.0	30	35
24.0	35	40
28.0	40	45
29.0	40	45
31.9	45	50
-	-	-

Measured by 100 MHz Oscilloscope.
Ripple-Noise is shown as p-p in the figure below.
Note: Slanted line shows the range of the rated load current.

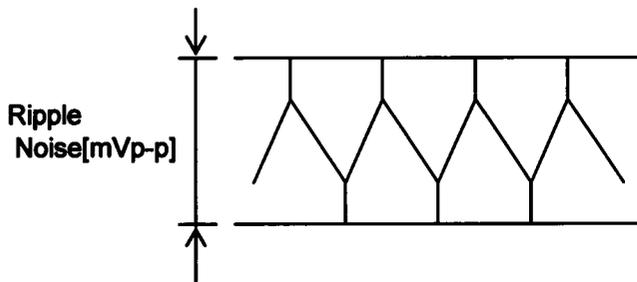



Fig. Complex Ripple Noise Wave Form



Model	CBS3504812
Item	Ripple Voltage (by Ambient Temp.)
Object	+12V29A

Testing Circuitry Figure A

1. Graph

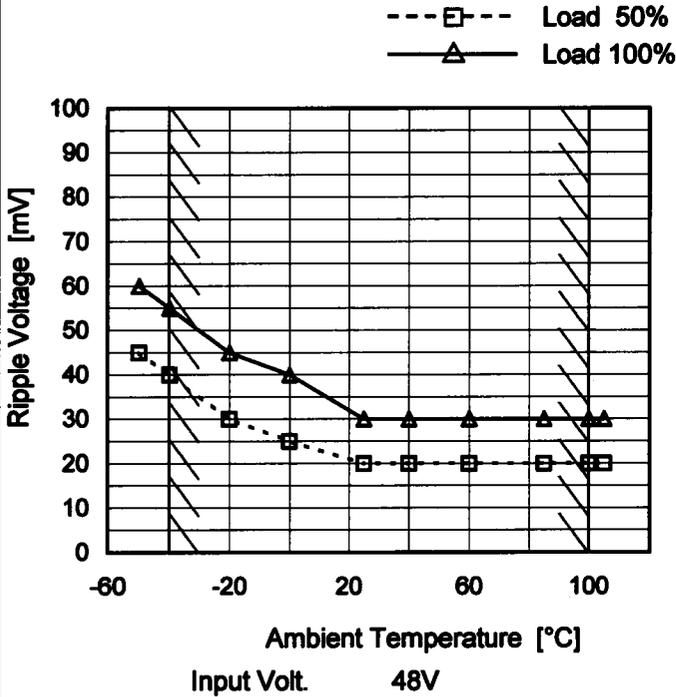

2. Values

Ambient Temperature [°C]	Ripple Voltage [mV]	
	Load 50%	Load 100%
-50	45	60
-40	40	55
-20	30	45
0	25	40
25	20	30
40	20	30
60	20	30
85	20	30
100	20	30
105	20	30
--	-	-

Measured by 100 MHz Oscilloscope.

Note: Slanted line shows the range of the rated ambient temperature.




Model	CBS3504812
Item	Ambient Temperature Drift
Object	+12V29A

Testing Circuitry Figure A

1. Graph

- △— Input Volt. 36V
- Input Volt. 48V
- Input Volt. 76V

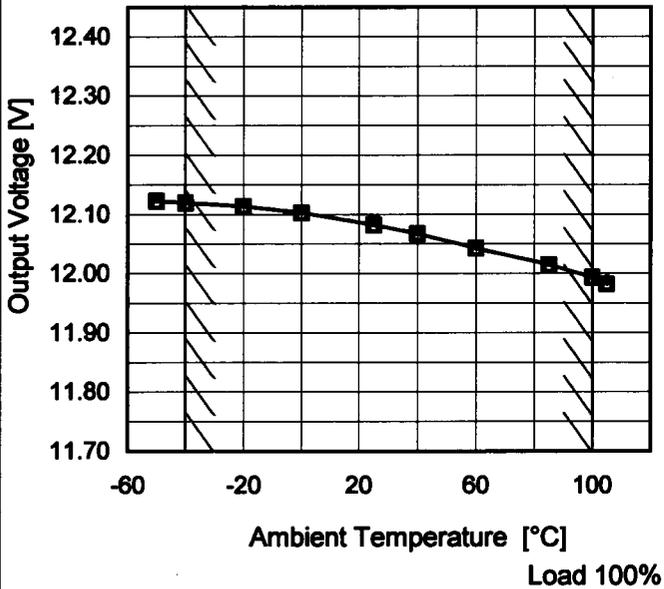

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Output Voltage [V]		
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]
-50	12.123	12.123	12.123
-40	12.120	12.120	12.120
-20	12.114	12.114	12.114
0	12.103	12.103	12.103
25	12.083	12.083	12.083
40	12.068	12.068	12.067
60	12.043	12.043	12.043
85	12.015	12.015	12.015
100	11.994	11.994	11.993
105	11.984	11.982	11.983
-	-	-	-



Model		CBS3504812	Testing Circuitry Figure A
Item	Output Voltage Accuracy		
Object	+12V29A		

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 100°C

Input Voltage : 36 - 76V

Load Current : 0 - 29A

* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ration) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ration [%]
Maximum Voltage	-40	36	0	12.120	±65	±0.5
Minimum Voltage	100	76	29	11.991		




COSEL																								
Model	CBS3504812	Temperature 25°C Testing Circuitry Figure A																						
Item	Time Lapse Drift																							
Object	+12V29A																							
1.Graph <p style="text-align: center;">Time [H]</p> <p>Input Volt. 48V Load 100%</p>		2.Values <table border="1"> <thead> <tr> <th>Time since start [H]</th> <th>Output Voltage [V]</th> </tr> </thead> <tbody> <tr><td>0.0</td><td>12.088</td></tr> <tr><td>0.5</td><td>12.079</td></tr> <tr><td>1.0</td><td>12.078</td></tr> <tr><td>2.0</td><td>12.078</td></tr> <tr><td>3.0</td><td>12.078</td></tr> <tr><td>4.0</td><td>12.079</td></tr> <tr><td>5.0</td><td>12.079</td></tr> <tr><td>6.0</td><td>12.079</td></tr> <tr><td>7.0</td><td>12.079</td></tr> <tr><td>8.0</td><td>12.079</td></tr> </tbody> </table>	Time since start [H]	Output Voltage [V]	0.0	12.088	0.5	12.079	1.0	12.078	2.0	12.078	3.0	12.078	4.0	12.079	5.0	12.079	6.0	12.079	7.0	12.079	8.0	12.079
Time since start [H]	Output Voltage [V]																							
0.0	12.088																							
0.5	12.079																							
1.0	12.078																							
2.0	12.078																							
3.0	12.078																							
4.0	12.079																							
5.0	12.079																							
6.0	12.079																							
7.0	12.079																							
8.0	12.079																							



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A
Item	Rise and Fall Time	
Object	+12V29A	


1. Graph

Input Volt. 36 V

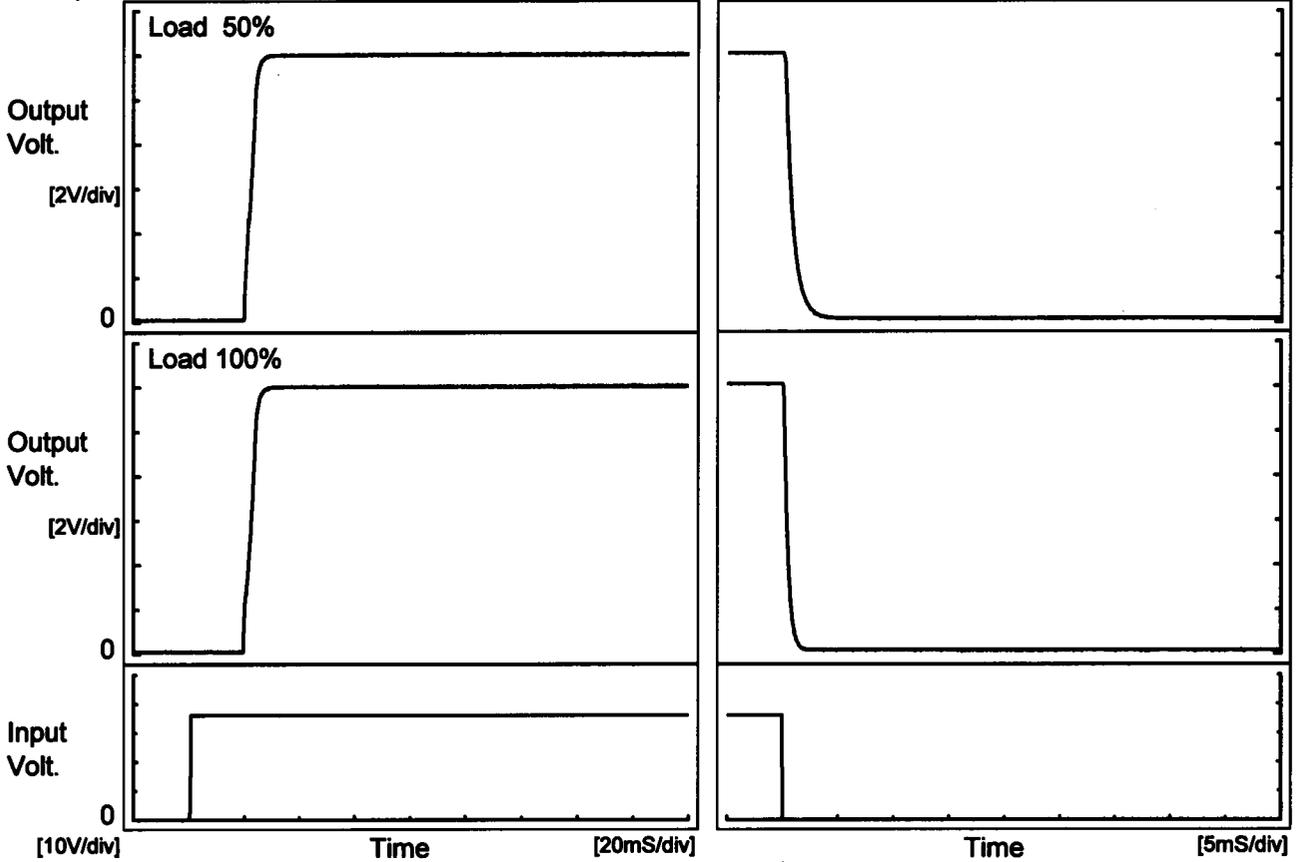

2. Values

		[mS]				
Load	Time	Td	Tr	Ts	Th	Tf
50 %		19.6	5.0	24.6	0.3	1.6
100 %		19.5	5.2	24.7	0.2	0.8

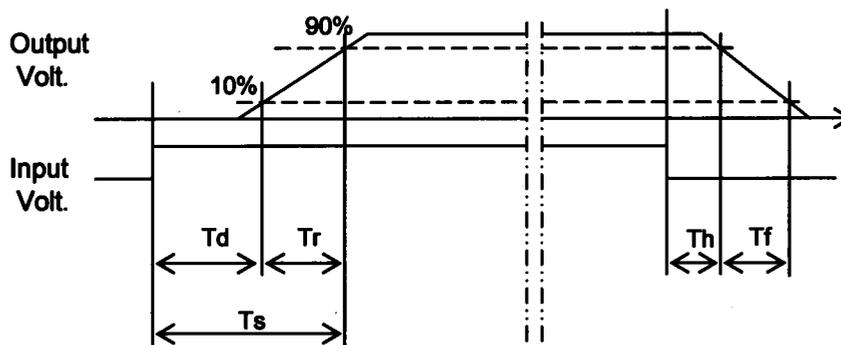




Model	CBS3504812
Item	Minimum Input Voltage for Regulated Output Voltage
Object	+12V29A

Testing Circuitry Figure A

1. Graph

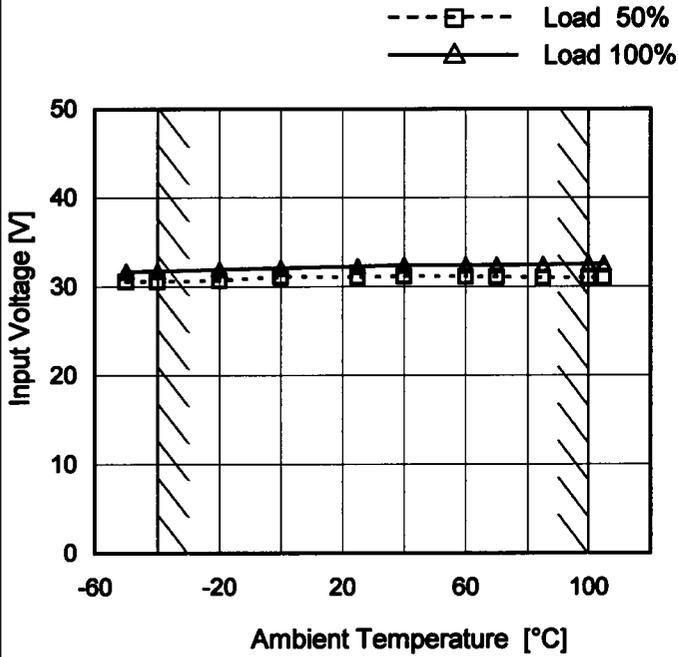

Note: Slanted line shows the range of the rated ambient temperature.

2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-50	30.6	31.7
-40	30.6	31.8
-20	30.7	32.0
0	31.1	32.2
25	31.1	32.3
40	31.2	32.5
60	31.2	32.5
70	31.2	32.5
85	31.0	32.5
100	31.1	32.6
105	31.0	32.6



Model CBS3504812		Temperature 25°C Testing Circuitry Figure A																																																											
Item	Overcurrent Protection																																																												
Object	+12V29A																																																												
<p>1. Graph</p> <p> Input Volt. 36V Input Volt. 48V Input Volt. 76V </p> <p style="text-align: center;">Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when the output voltage is from 7.2V to 0V.</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Output Voltage [V]</th> <th colspan="3">Load Current [A]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>12.0</td><td>29.54</td><td>30.12</td><td>29.54</td></tr> <tr><td>11.4</td><td>38.60</td><td>38.28</td><td>39.16</td></tr> <tr><td>10.8</td><td>38.65</td><td>38.47</td><td>39.54</td></tr> <tr><td>9.6</td><td>38.77</td><td>38.90</td><td>40.14</td></tr> <tr><td>8.4</td><td>38.95</td><td>39.22</td><td>40.68</td></tr> <tr><td>7.2</td><td>39.12</td><td>39.49</td><td>41.75</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>--</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>	Output Voltage [V]	Load Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	12.0	29.54	30.12	29.54	11.4	38.60	38.28	39.16	10.8	38.65	38.47	39.54	9.6	38.77	38.90	40.14	8.4	38.95	39.22	40.68	7.2	39.12	39.49	41.75	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Output Voltage [V]	Load Current [A]																																																												
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																										
12.0	29.54	30.12	29.54																																																										
11.4	38.60	38.28	39.16																																																										
10.8	38.65	38.47	39.54																																																										
9.6	38.77	38.90	40.14																																																										
8.4	38.95	39.22	40.68																																																										
7.2	39.12	39.49	41.75																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										
--	-	-	-																																																										



Model CBS3504812		Testing Circuitry Figure A																																																			
Item	Overvoltage Protection																																																				
Object	+12V29A																																																				
<p>1. Graph</p> <p> —△— Input Volt. 36V ---□--- Input Volt. 48V -·-○-·- Input Volt. 76V </p> <p style="text-align: center;">Ambient Temperature [°C] Load 0%</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Ambient Temperature [°C]</th> <th colspan="3">Operating Point [V]</th> </tr> <tr> <th>Input Volt. 36[V]</th> <th>Input Volt. 48[V]</th> <th>Input Volt. 76[V]</th> </tr> </thead> <tbody> <tr><td>-50</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>-40</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>-20</td><td>15.46</td><td>15.45</td><td>15.45</td></tr> <tr><td>0</td><td>15.45</td><td>15.45</td><td>15.45</td></tr> <tr><td>25</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>40</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>60</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>70</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>85</td><td>15.46</td><td>15.46</td><td>15.46</td></tr> <tr><td>100</td><td>15.34</td><td>15.34</td><td>15.34</td></tr> <tr><td>105</td><td>15.34</td><td>15.34</td><td>15.34</td></tr> </tbody> </table>	Ambient Temperature [°C]	Operating Point [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	-50	15.46	15.46	15.46	-40	15.46	15.46	15.46	-20	15.46	15.45	15.45	0	15.45	15.45	15.45	25	15.46	15.46	15.46	40	15.46	15.46	15.46	60	15.46	15.46	15.46	70	15.46	15.46	15.46	85	15.46	15.46	15.46	100	15.34	15.34	15.34	105	15.34	15.34	15.34
Ambient Temperature [°C]	Operating Point [V]																																																				
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																		
-50	15.46	15.46	15.46																																																		
-40	15.46	15.46	15.46																																																		
-20	15.46	15.45	15.45																																																		
0	15.45	15.45	15.45																																																		
25	15.46	15.46	15.46																																																		
40	15.46	15.46	15.46																																																		
60	15.46	15.46	15.46																																																		
70	15.46	15.46	15.46																																																		
85	15.46	15.46	15.46																																																		
100	15.34	15.34	15.34																																																		
105	15.34	15.34	15.34																																																		
<p>Note: Slanted line shows the range of the rated ambient temperature.</p>																																																					


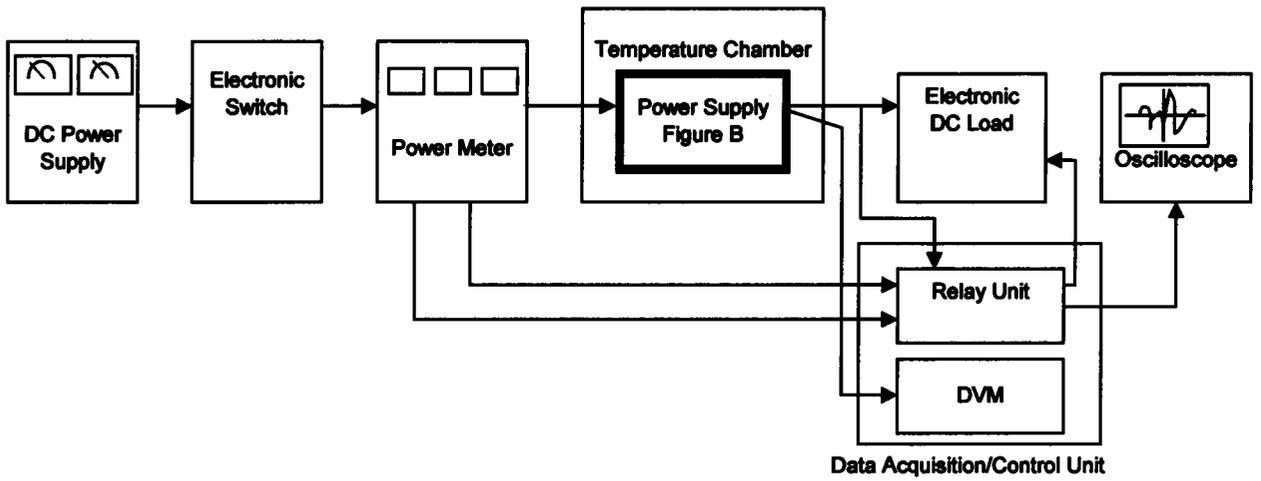


Figure A

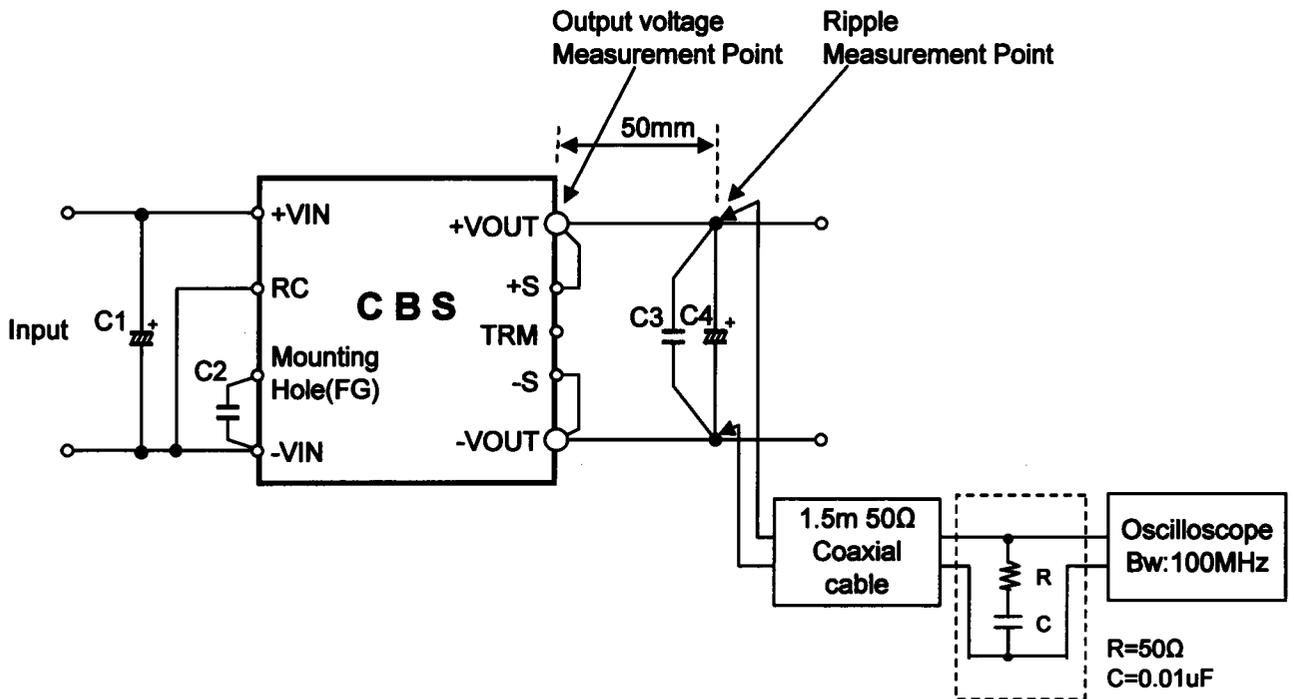

- C1 : 100V 68 μ F \times 2
- C2 : 4700pF
- C3 : 50V 0.1 μ F
- C4 : 16V 470 μ F \times 3 ($-40^{\circ}\text{C} \leq T_B \leq -20^{\circ}\text{C}$)
16V 470 μ F ($-20^{\circ}\text{C} < T_B \leq 100^{\circ}\text{C}$)
- TB : Base Plate Temp.

Figure B