

**TEST DATA OF EAP-03-□□□/ESP-03-□□□****Noise Filter**

Nov. 30. 2010

Approved by : Toshio Watanabe  
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda  
Tadayuki Noda Design Engineer

**COSEL CO.,LTD.**



## CONTENTS

1. Attenuation Characteristics . . . . .	1
2. Pulse Attenuation Characteristics . . . . .	6
3. Leakage Current . . . . .	9
4. Figure of Testing Circuitry . . . . .	10

(Final Page 11)



# COSEL

Model	EAP-03-□□□/ESP-03-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

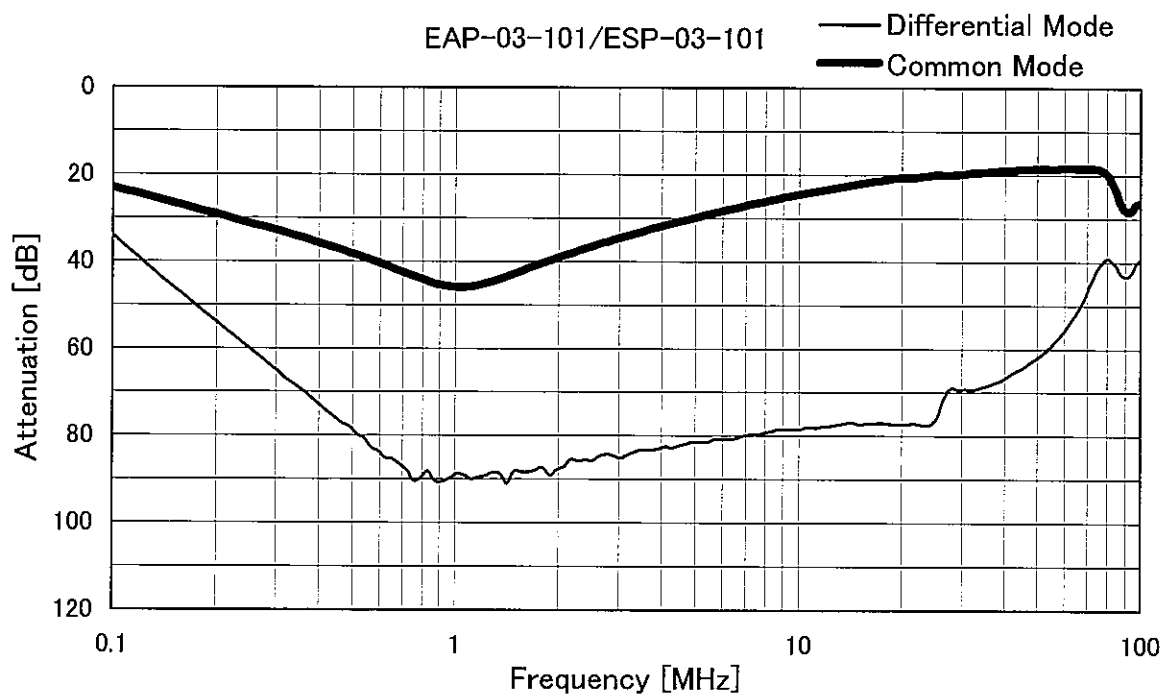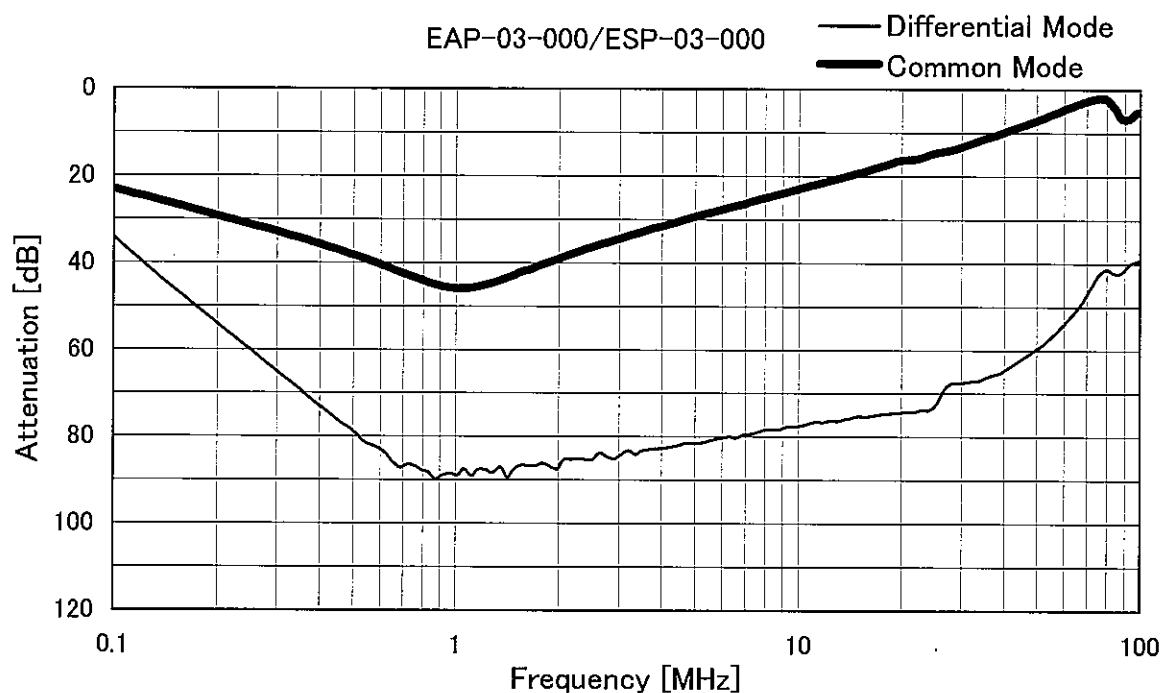



# COSEL

Model	EAP-03-□□□/ESP-03-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

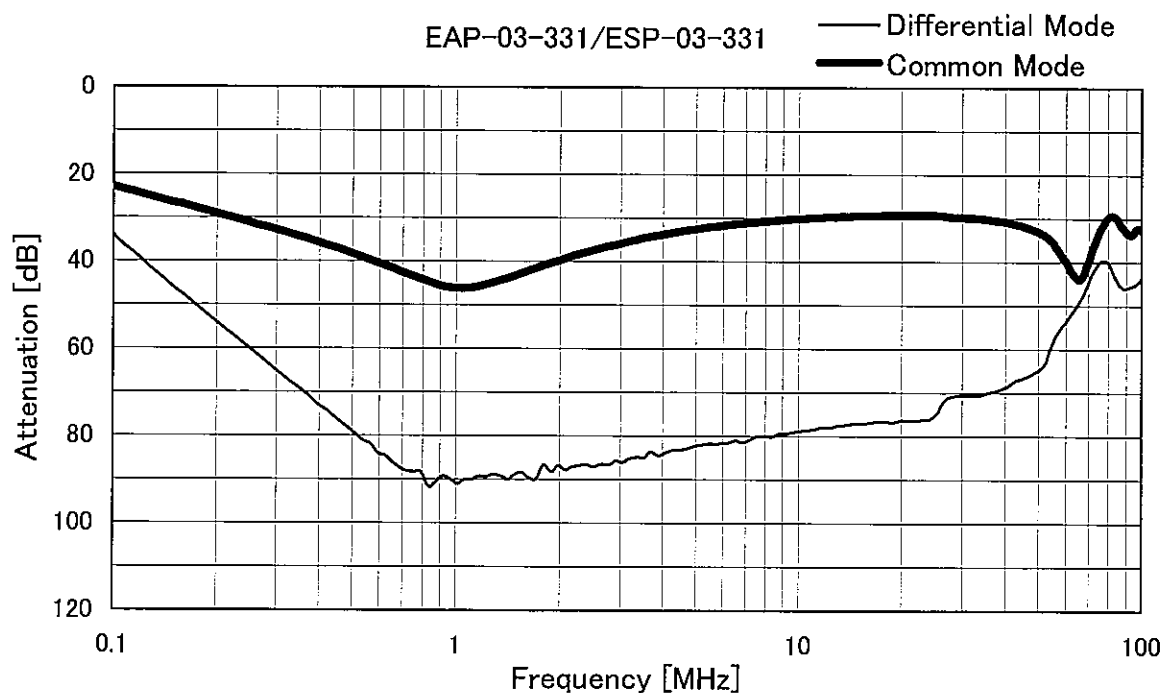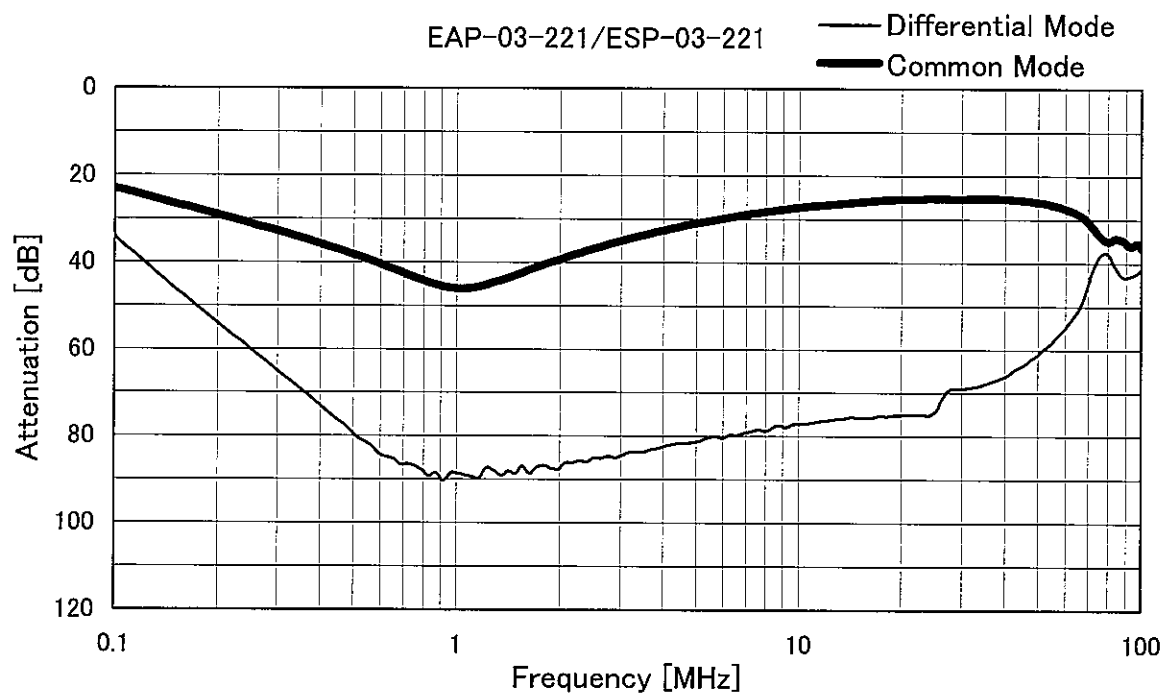



# COSEL

Model	EAP-03-□□□/ESP-03-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

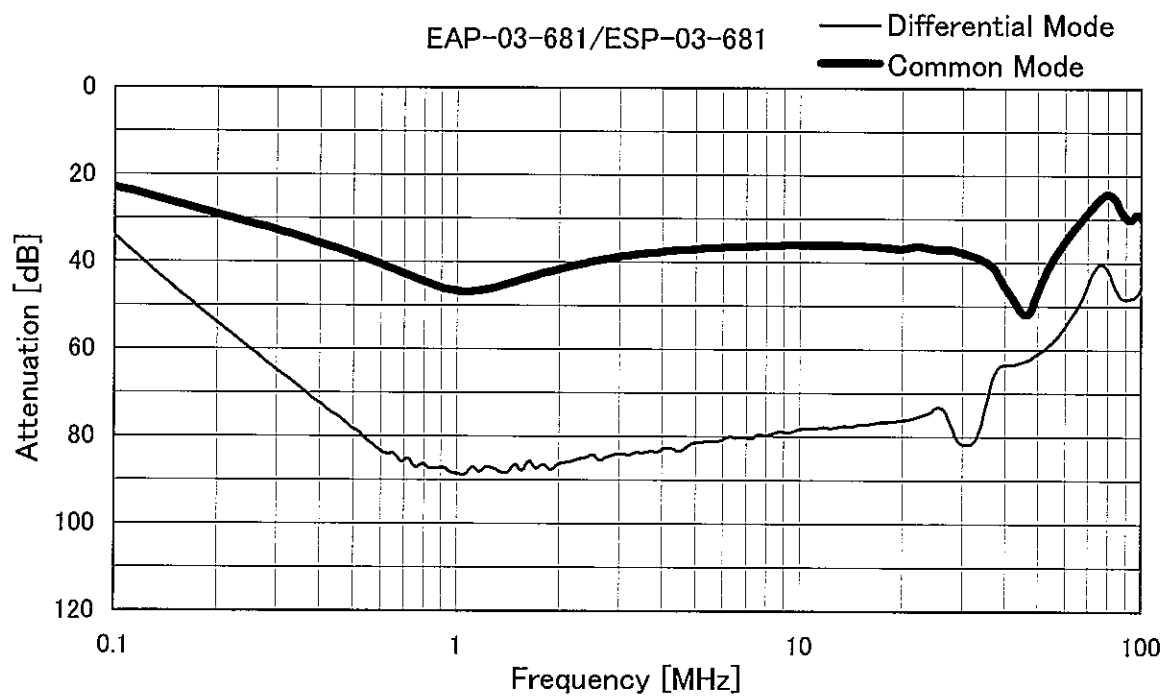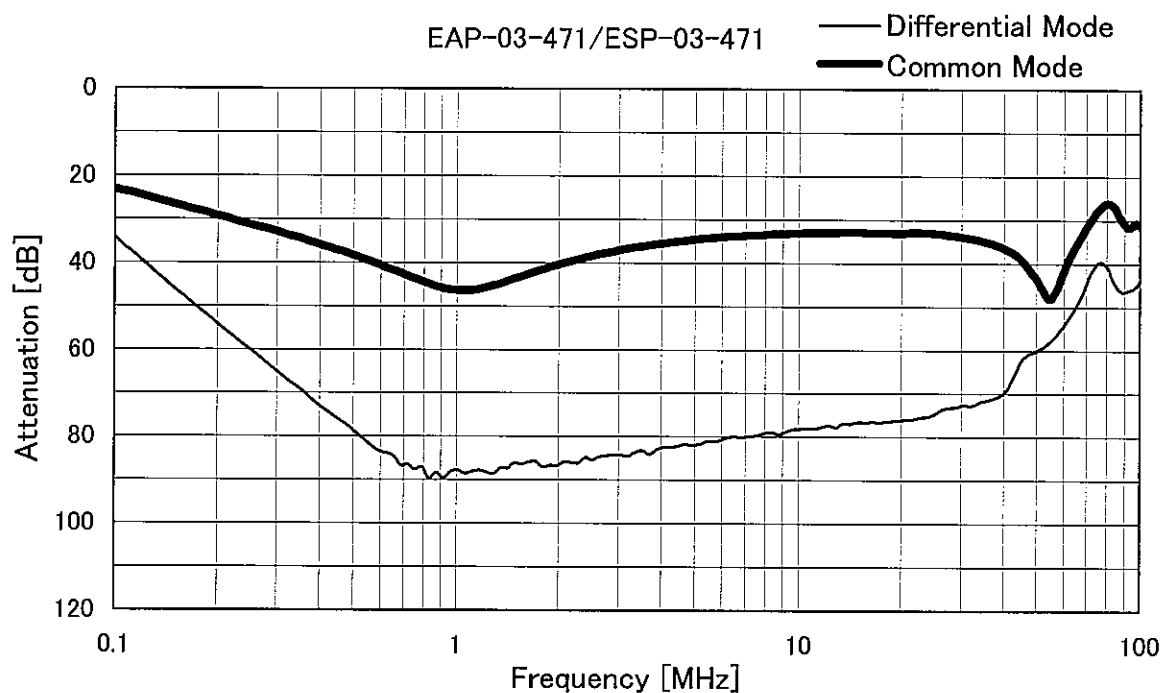



# COSEL

Model	EAP-03-□□□/ESP-03-□□□		
Item	Attenuation Characteristics	Temperature	25°C
Object	_____	Testing Circuitry	Figure A



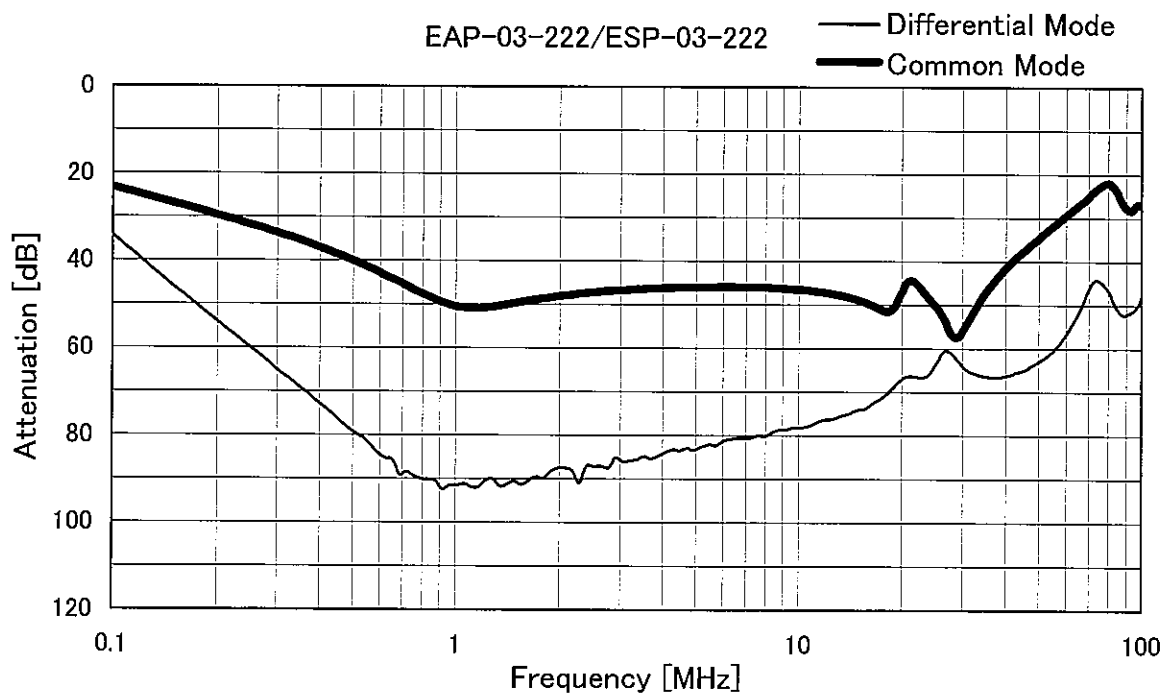
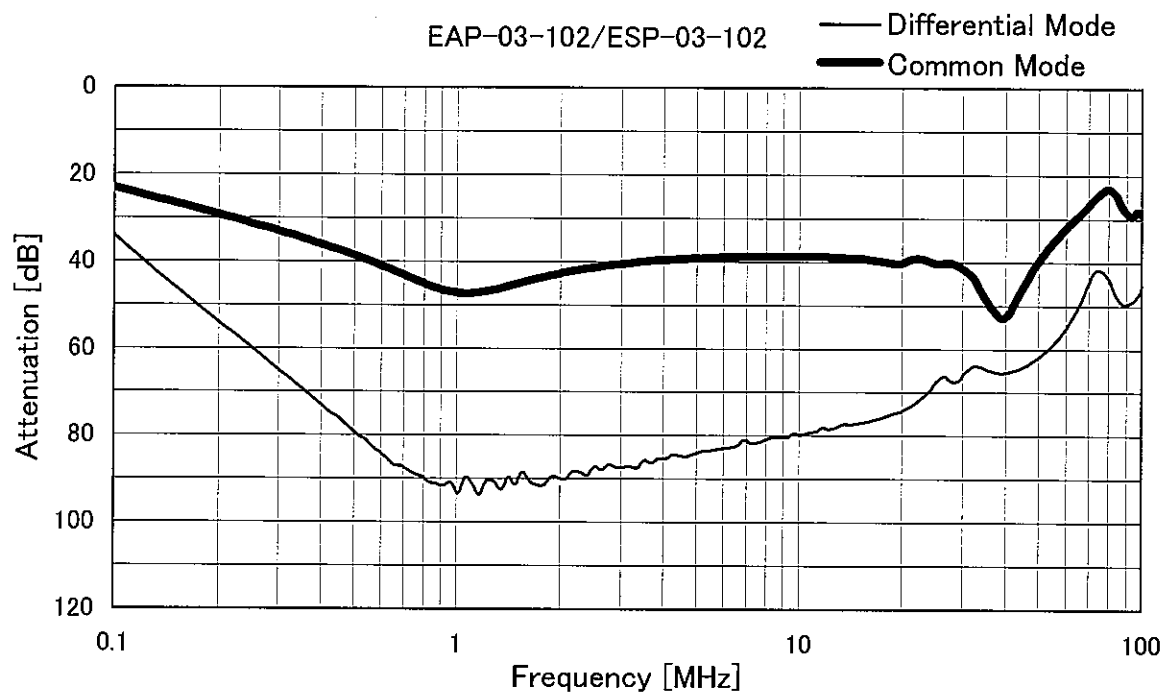


# COSEL

Model	EAP-03-□□□/ESP-03-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object			



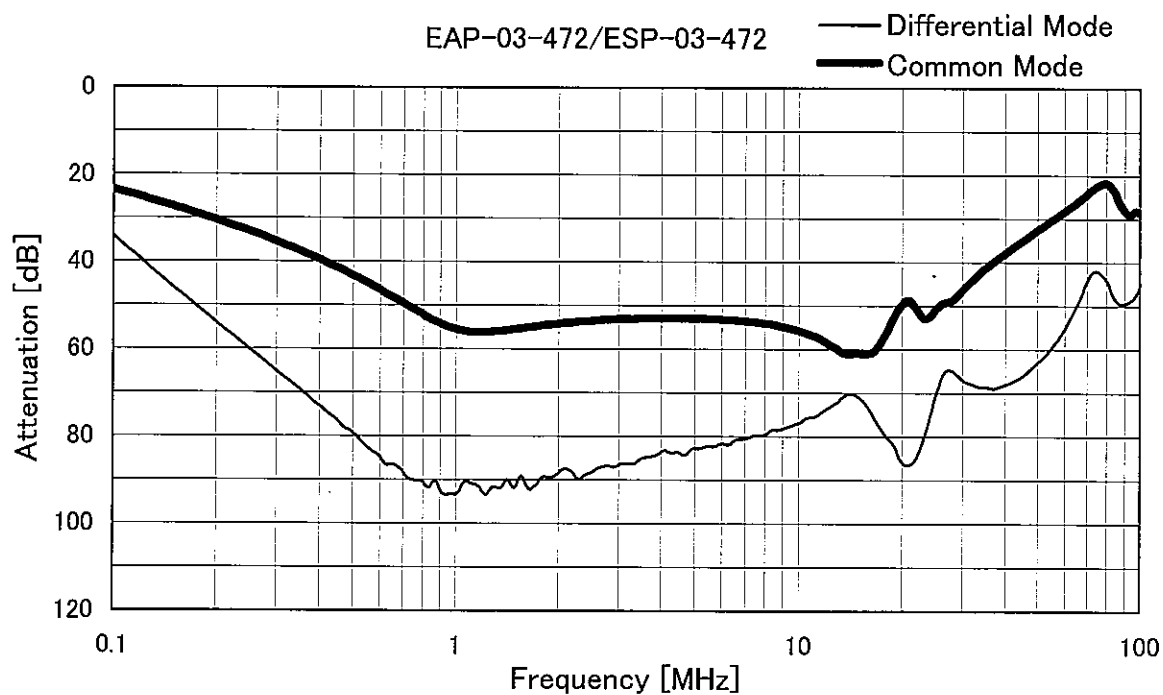
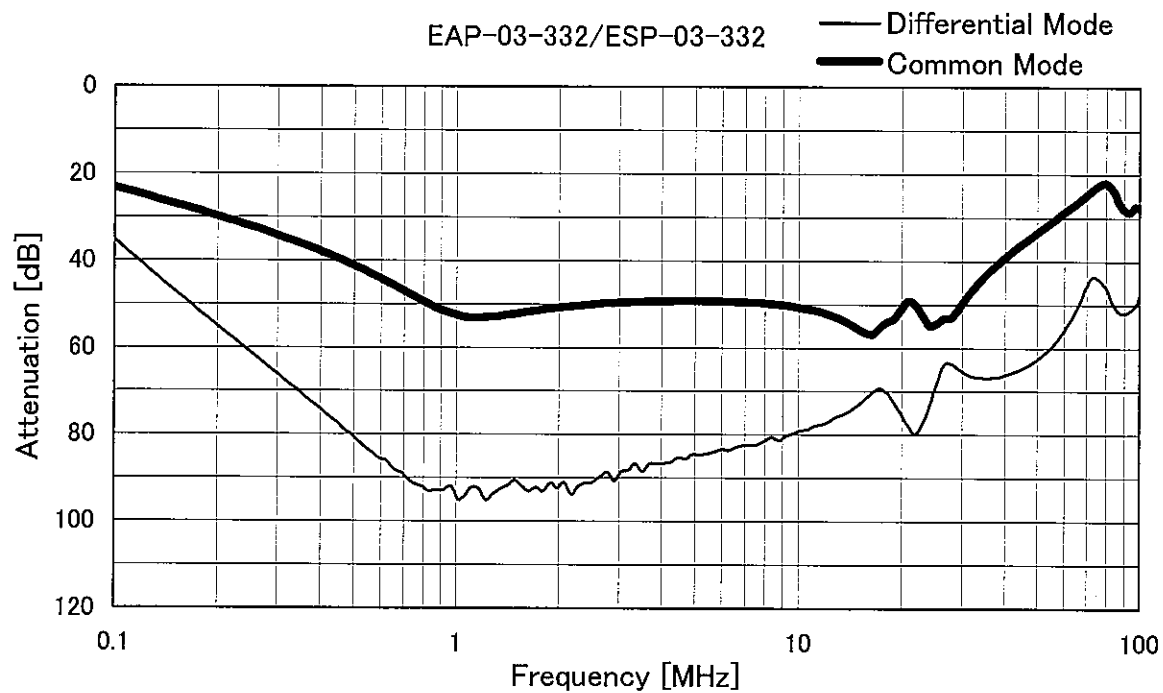


Model	EAP-03-□□□/ESP-03-□□□	Temperature	25°C
Item	Pulse Attenuation Characteristics	Testing Circuitry	Figure B
Object			

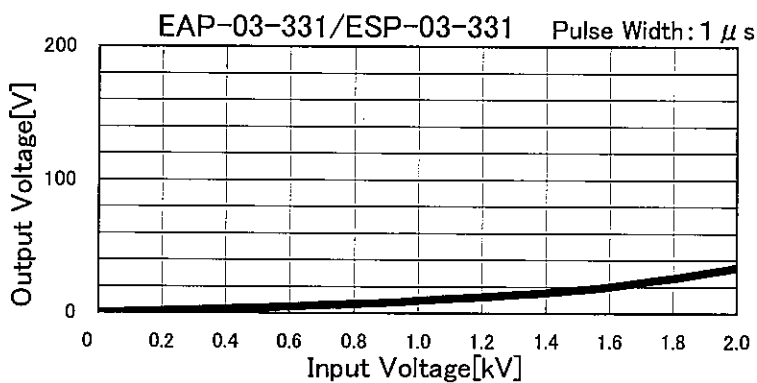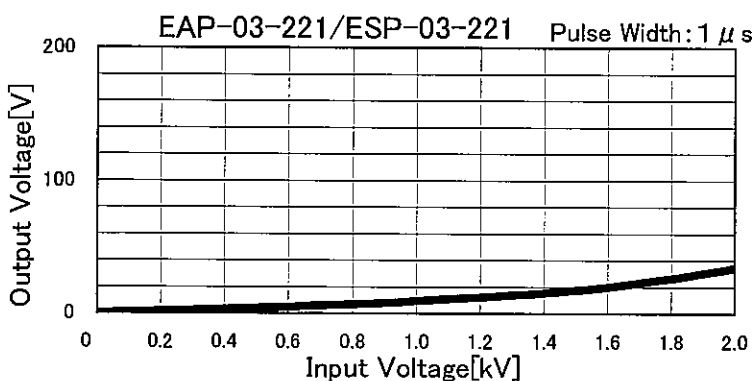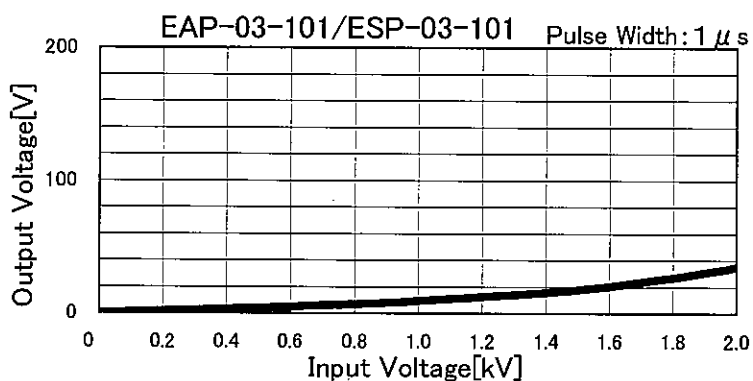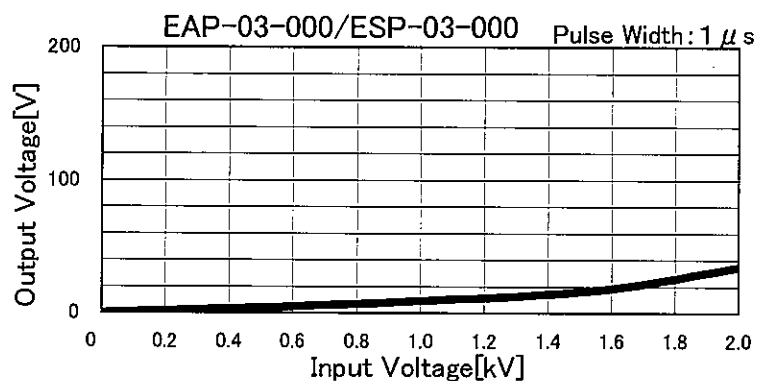





		Temperature 25°C Testing Circuitry Figure B
Model	EAP-03-□□□/ESP-03-□□□	
Item	Pulse Attenuation Characteristics	
Object	_____	

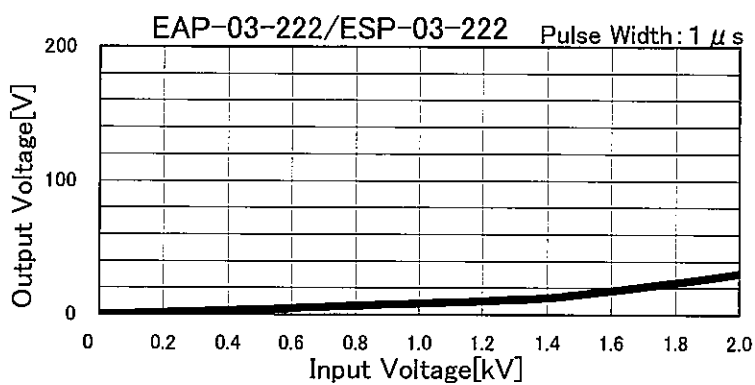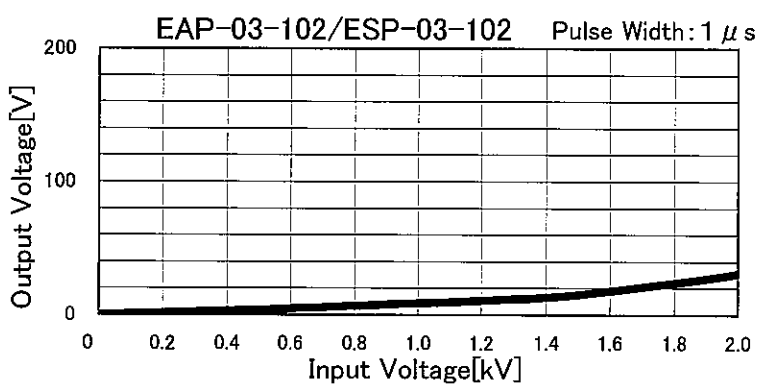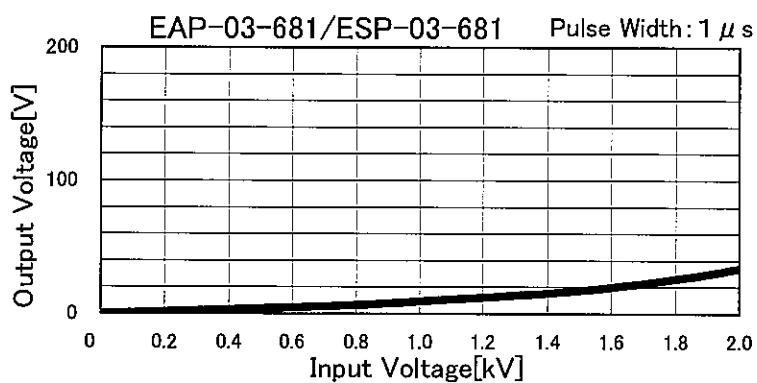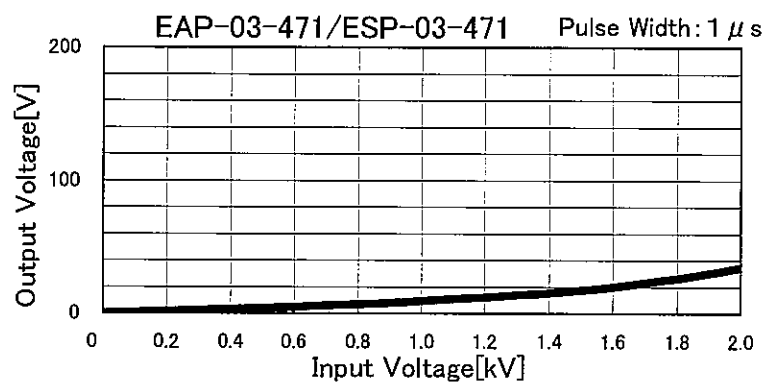



		Temperature 25°C Testing Circuitry Figure B
Model	EAP-03-□□□/ESP-03-□□□	
Item	Pulse Attenuation Characteristics	
Object	_____	

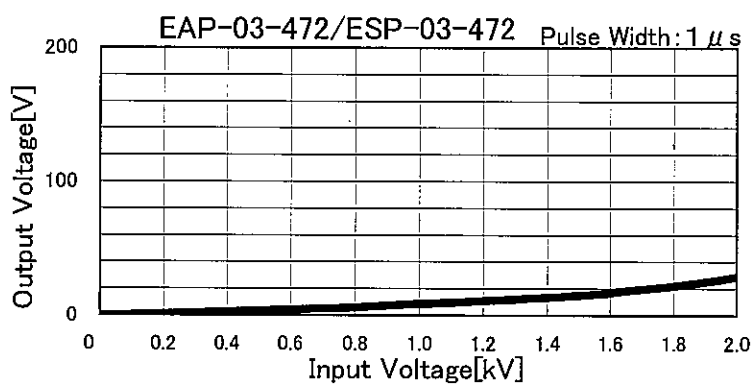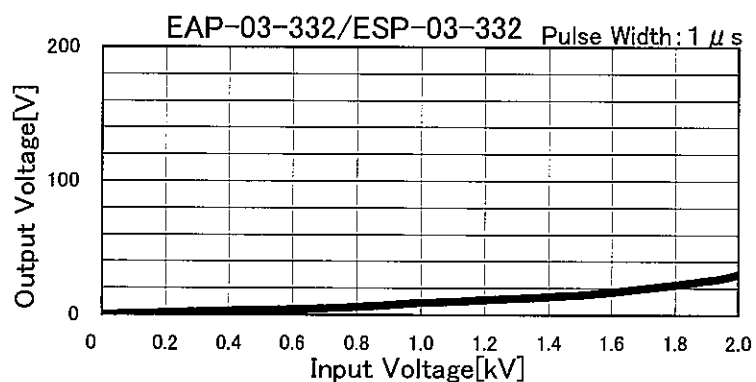



Model		EAP-03-□□□/ESP-03-□□□	Temperature 25°C Testing Circuitry Figure C
Item		Leakage Current	
Object		_____	

## 1.Results

[mA]

Model	Standards	Input Volt.				Note
		100 [V]	125 [V]	230 [V]	250 [V]	
EAP-03-000 ESP-03-000	UL1283	0.002	0.002	0.004	0.005	
EAP-03-101 ESP-03-101	UL1283	0.006	0.007	0.013	0.015	
EAP-03-221 ESP-03-221	UL1283	0.011	0.013	0.025	0.028	
EAP-03-331 ESP-03-331	UL1283	0.015	0.019	0.038	0.042	
EAP-03-471 ESP-03-471	UL1283	0.023	0.030	0.061	0.069	
EAP-03-681 ESP-03-681	UL1283	0.031	0.040	0.082	0.093	
EAP-03-102 ESP-03-102	UL1283	0.044	0.056	0.110	0.120	
EAP-03-222 ESP-03-222	UL1283	0.090	0.120	0.230	0.250	
EAP-03-332 ESP-03-332	UL1283	0.130	0.170	0.340	0.370	
EAP-03-472 ESP-03-472	UL1283	0.190	0.240	0.480	0.520	

## 2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

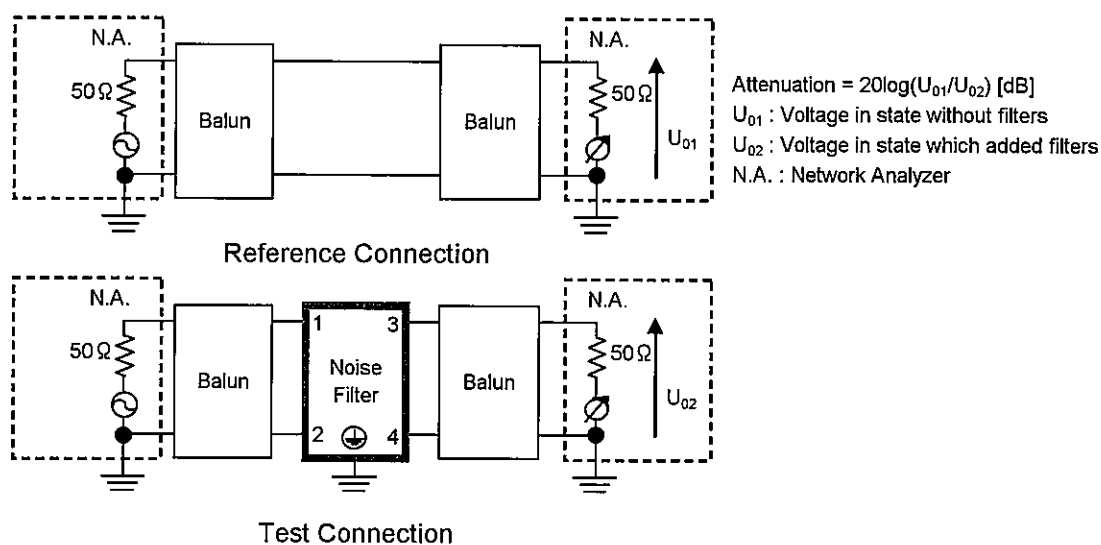


Figure A - 1 Differential mode attenuation measurement


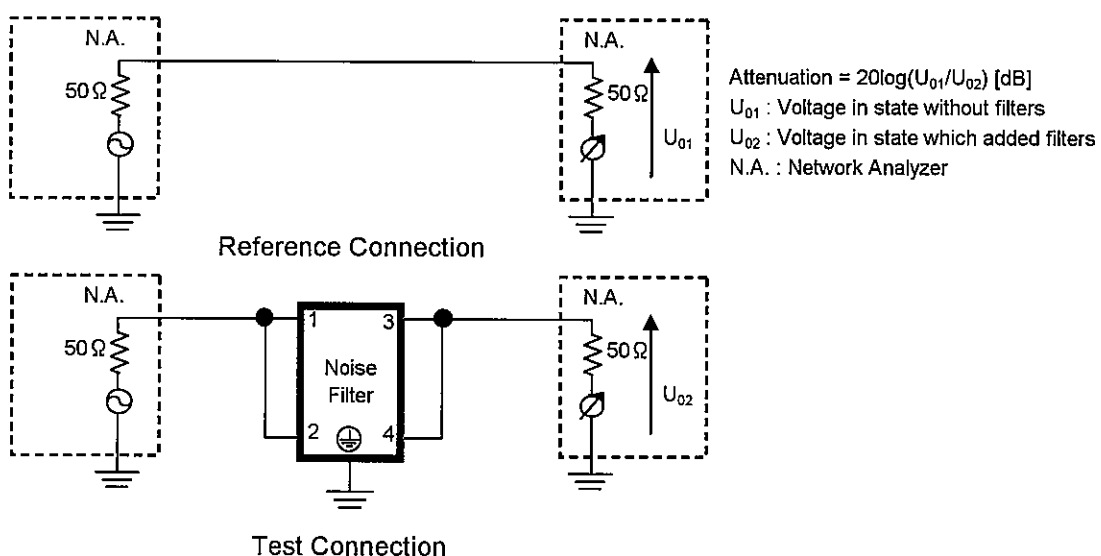


Figure A - 2 Common mode attenuation measurement

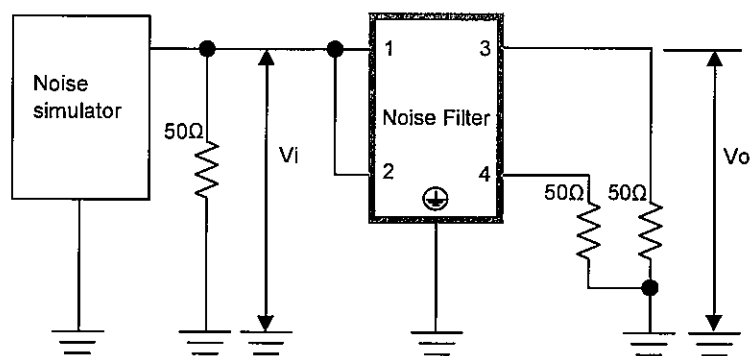

Pulse attenuation measurement

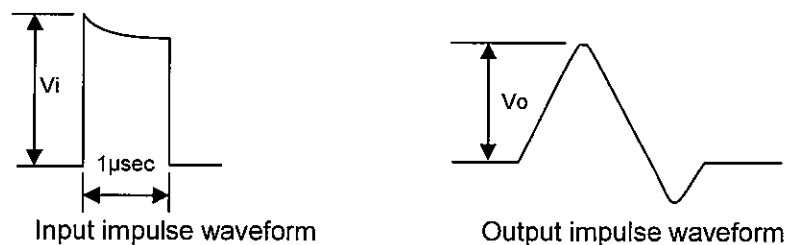


Figure B Pulse attenuation measurement

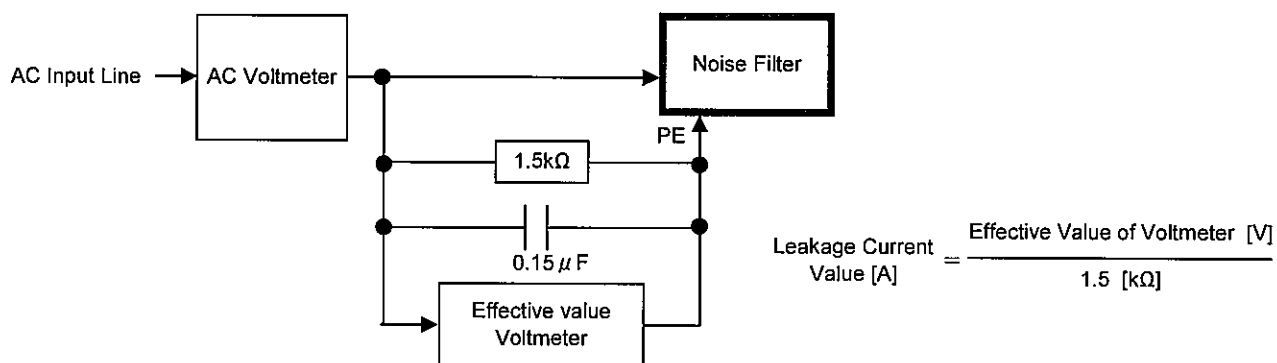


Figure C Leakage current measurement ( UL1283 )