



DATA SHEET		Date	15-Nov-16
Model	FETA2500BA-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Kawataka

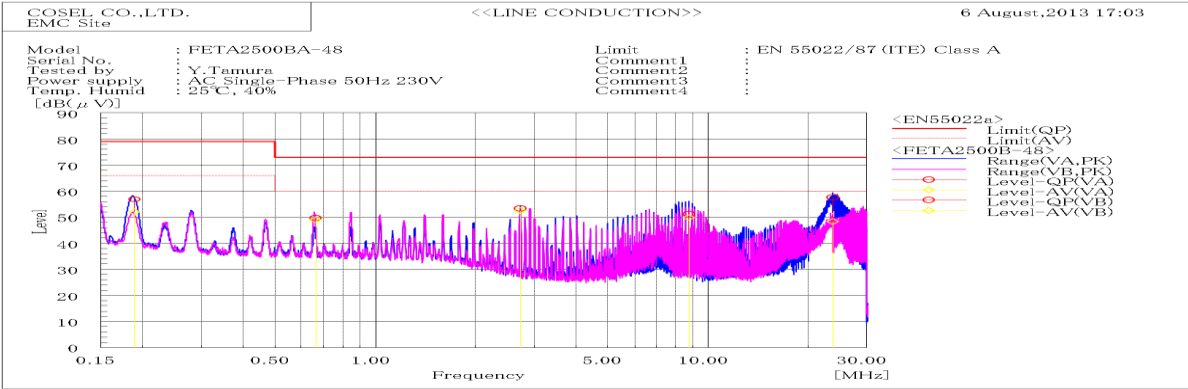


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18917	VA	36.8	31.9	20.1	56.9	52.0	79	66	22.1	14.0	Pass	
0.6608	VB	29.7	29.1	20.0	49.7	49.1	73	60	23.3	10.9	Pass	
2.72913	VA	33.2	32.5	20.1	53.3	52.6	73	60	19.7	7.4	Pass	
8.75431	VA	30.7	29.4	20.4	51.1	49.8	73	60	21.9	10.2	Pass	
23.6235	VA	36.7	27.3	21.0	57.7	48.3	73	60	15.3	11.7	Pass	

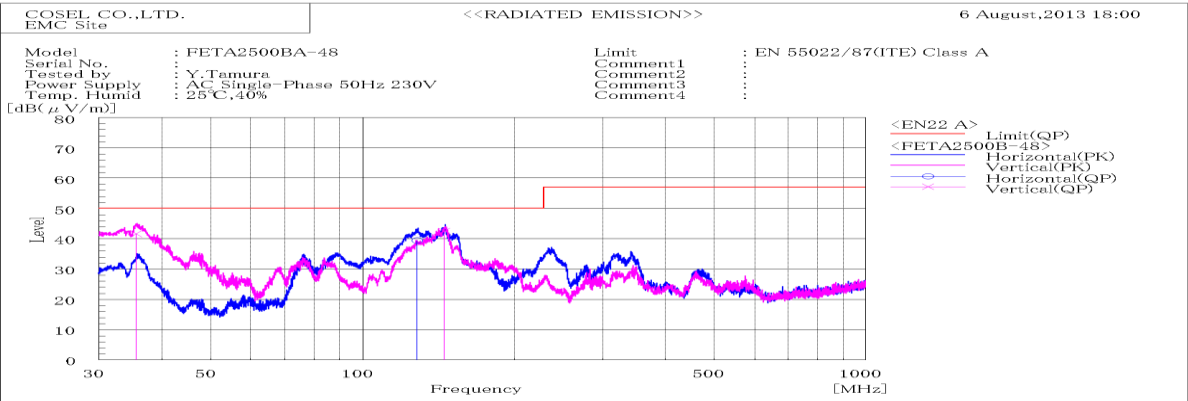


Frequency MHz	Polariz ation	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
35.562	V	56.7	-15.0	41.7	50	8.3	Pass	102.0	324.0	
128.681	H	59.1	-19.6	39.5	50	10.5	Pass	130.0	5.0	
145.704	V	60.1	-17.6	42.5	50	7.5	Pass	155.0	188.0	

DATA SHEET		Date	15-Nov-16
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Kawataka

1. Line conduction

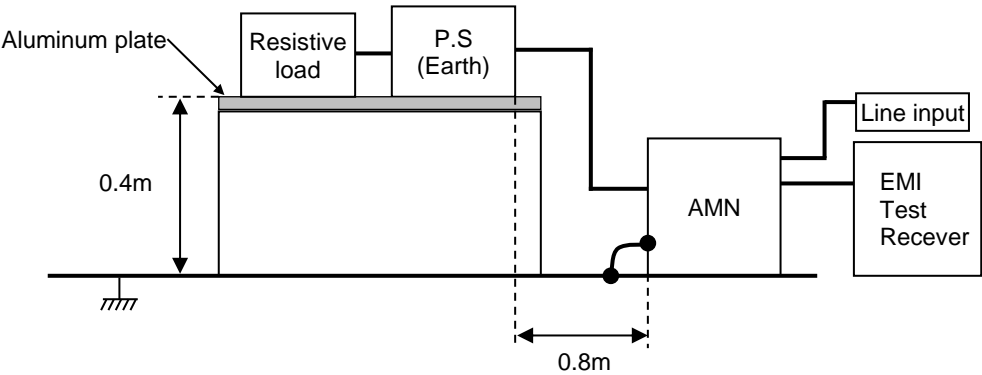

2. Radiated emission


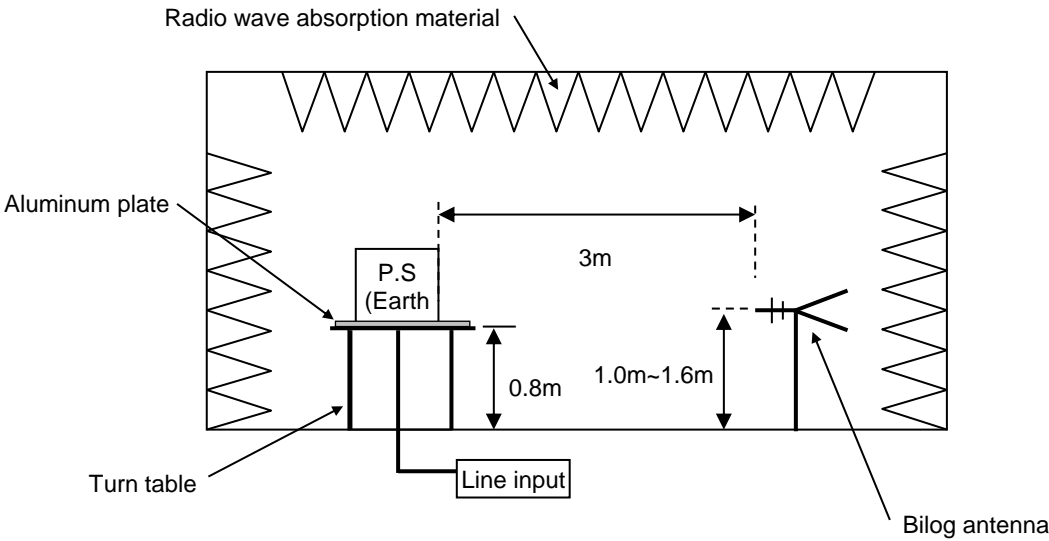


Conditions

Test : EMI
Model Name : FETA2500BA-48

○ Photographs of test set-up

1.LINE CONDUCTION

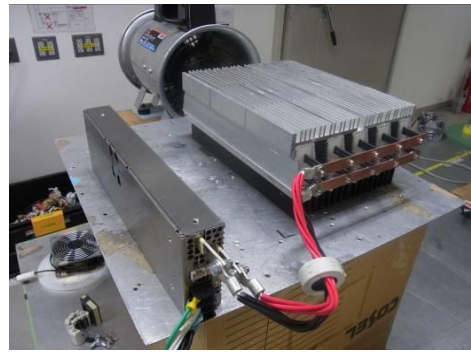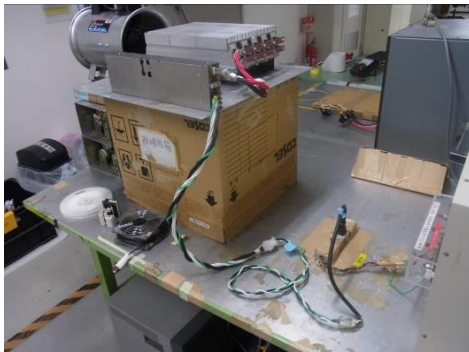

2.RADIATED EMISSION

