



DATA SHEET			Date	11-May-18
Model	GHA300F-24-SNF		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	T. Nagai

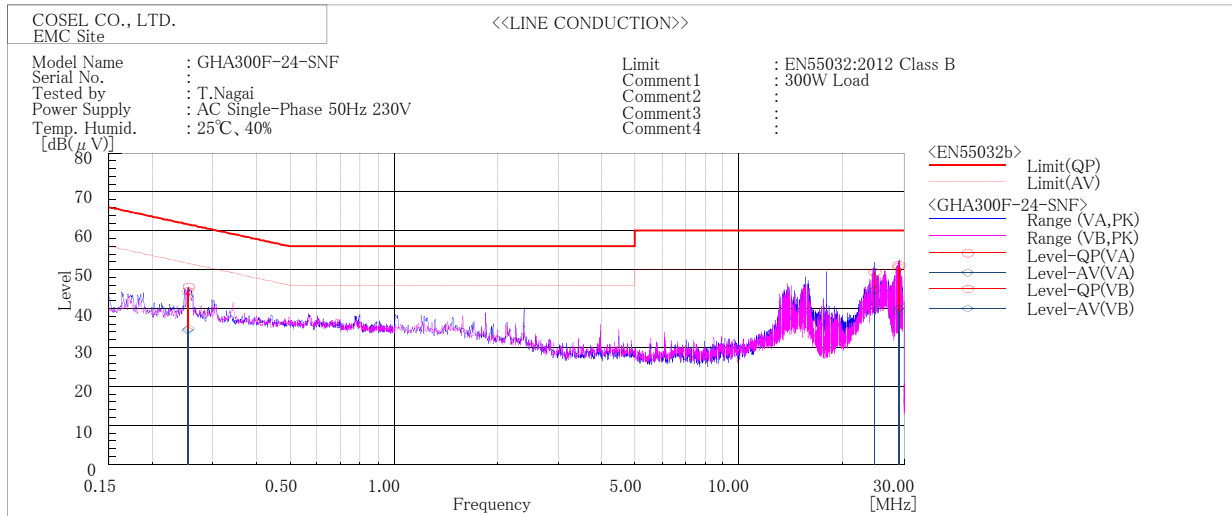


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.25307	VB	44.5	34.4	61.7	51.7	17.2	17.3	Pass	
0.25495	VA	45.6	34.9	61.6	51.6	16	16.7	Pass	
24.7641	VA	49.3	44.7	60	50	10.7	5.3	Pass	
28.94395	VB	50.6	40	60	50	9.4	10	Pass	
29.13895	VA	51.1	39.1	60	50	8.9	10.9	Pass	

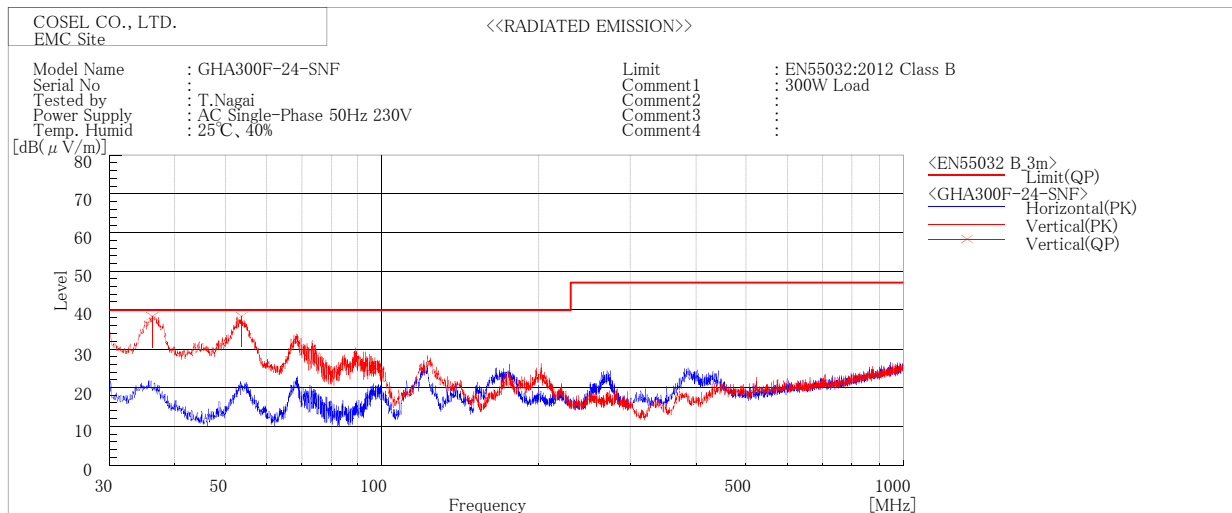

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
36.304	V	Stable	35.1	40.0	4.9	Pass	105	294	
53.959	V	Stable	34.0	40.0	6.0	Pass	108	326	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

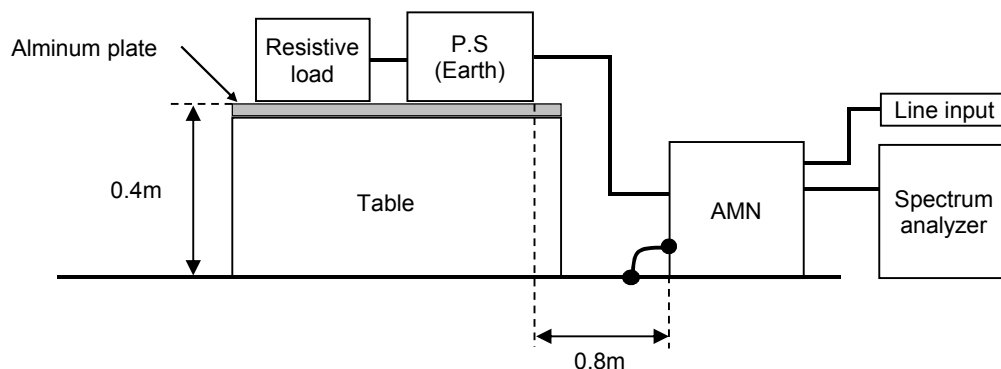

2. Radiated emission

