



DATA SHEET		Date	11-May-18
Model	GHA500F-12-SNF	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

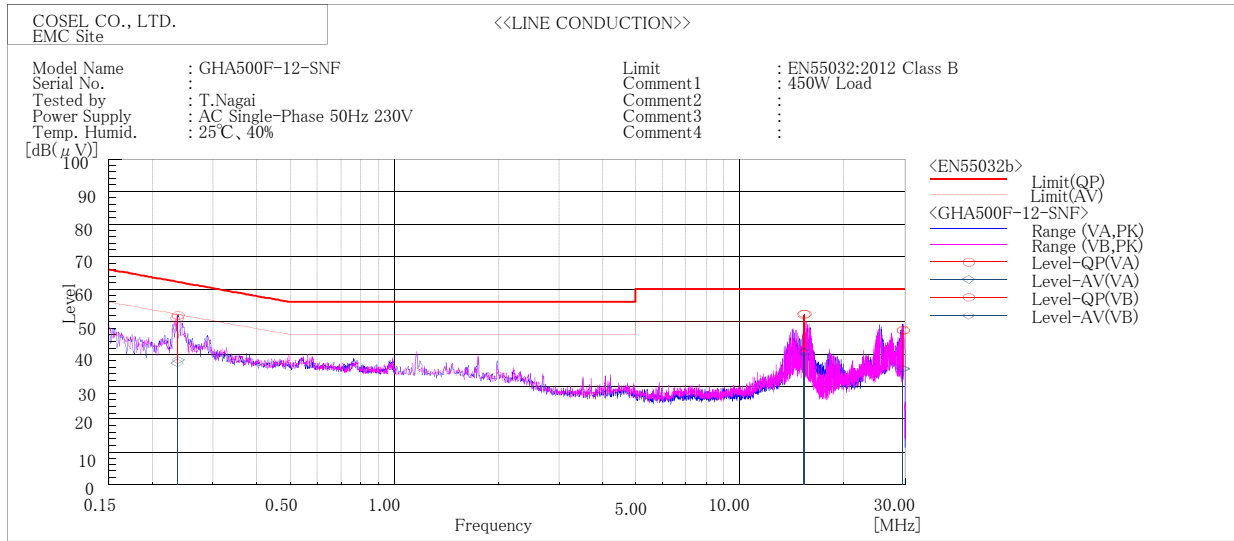


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.23549	VB	51.1	37.4	62.3	52.3	11.2	14.9	Pass	
0.23696	VA	51.8	38.2	62.2	52.2	10.4	14	Pass	
15.3495	VB	52.2	40.7	60	50	7.8	9.3	Pass	
15.4525	VA	52.3	40.8	60	50	7.7	9.2	Pass	
29.7398	VA	47.5	35.6	60	50	12.5	14.4	Pass	
29.74185	VB	47.3	35.4	60	50	12.7	14.6	Pass	

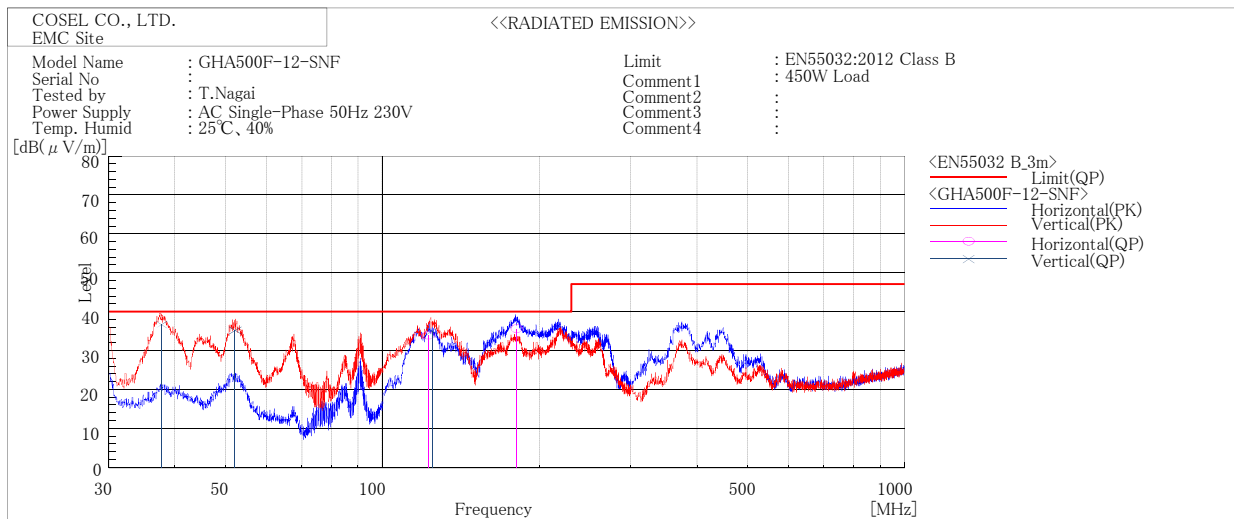

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
37.765	V	Stable	36.7	40.0	3.3	Pass	103	286	
52.211	V	Stable	35.2	40.0	4.8	Pass	104	311	
122.557	H	Stable	33.9	40.0	6.1	Pass	143	9	
124.446	V	Stable	35.0	40.0	5.0	Pass	156	297	
180.754	H	Stable	35.7	40.0	4.3	Pass	158	18	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

1. Line conduction

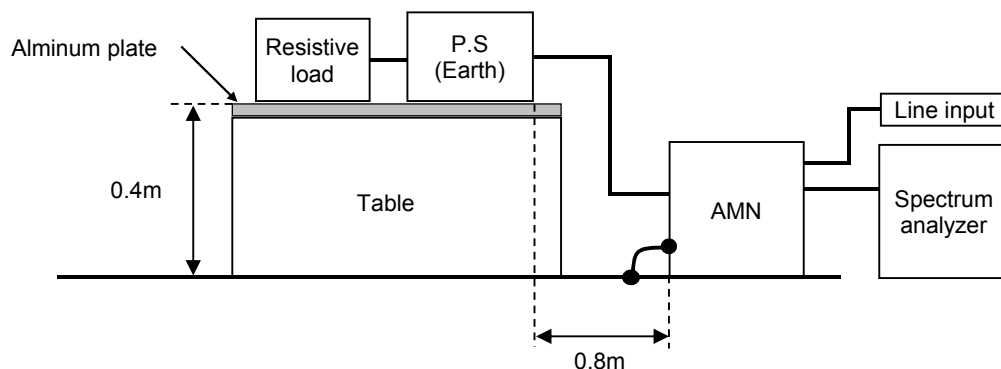

2. Radiated emission

