



DATA SHEET		Date	11-May-18
Model	GHA500F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

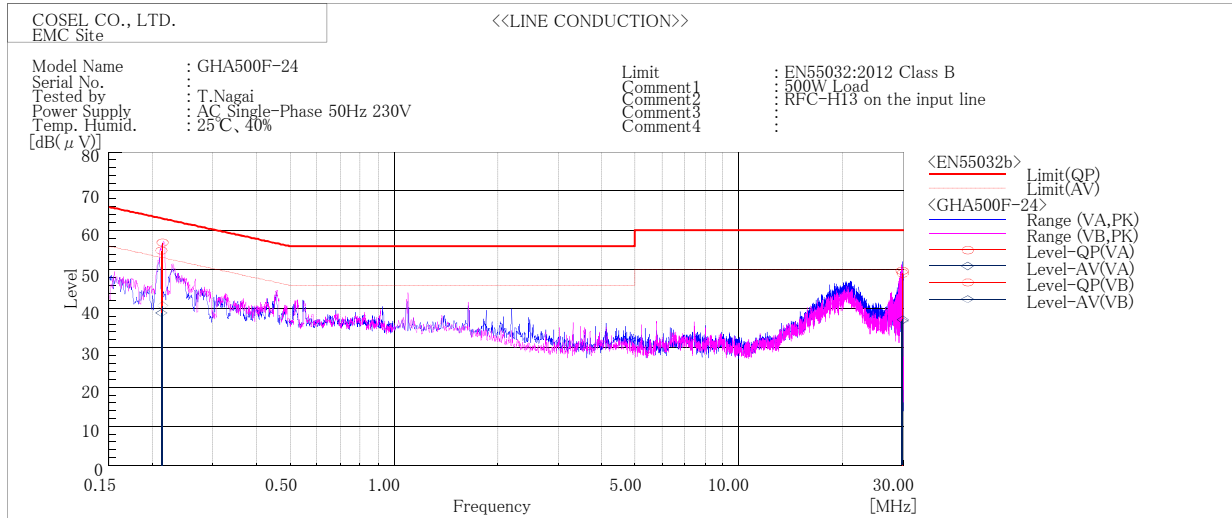


Frequency MHz	Line Phase	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.21209	VA	54.9	38.9	63.1	53.1	8.2	14.2	Pass	
0.21417	VB	56.9	40.8	63	53	6.1	12.2	Pass	
29.74915	VB	49.7	36.9	60	50	10.3	13.1	Pass	
29.88465	VA	49.1	37.2	60	50	10.9	12.8	Pass	

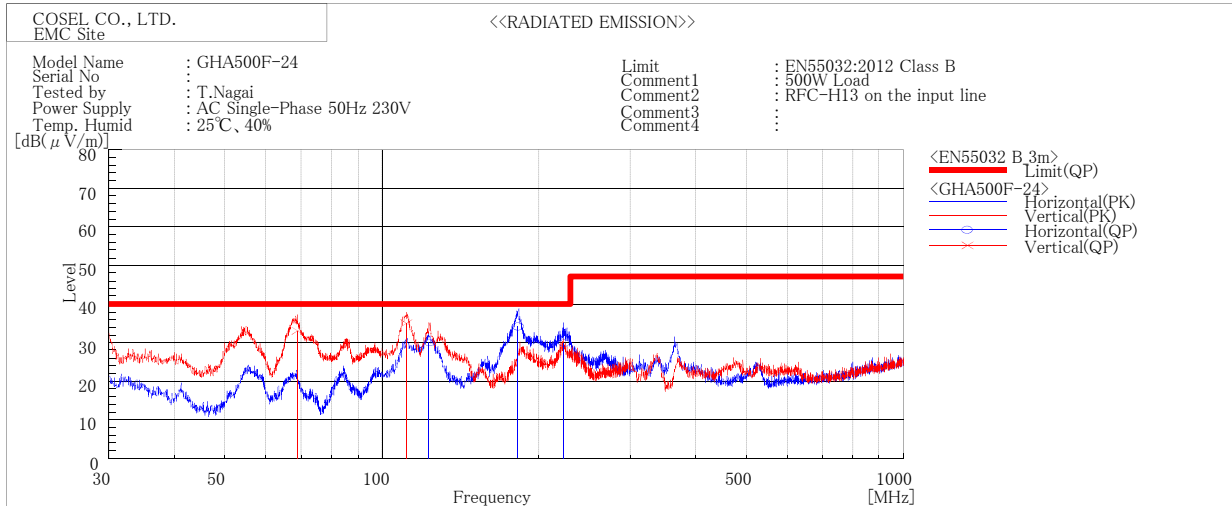

Frequency MHz	Polarization	Stability	Reading dB(uV)	Limit dB(uV/m)	Margin dB(uV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
68.941	V	Stable	33.1	40.0	6.9	Pass	100	160	
111.326	V	Stable	35.0	40.0	5.0	Pass	155	187	
123.225	H	Stable	30.1	40.0	9.9	Pass	145	9	
182.757	H	Stable	34.3	40.0	5.7	Pass	159	13	
223.687	H	Stable	29.9	40.0	10.1	Pass	126	133	

DATA SHEET		Date	11-May-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T. Nagai

## 1. Line conduction

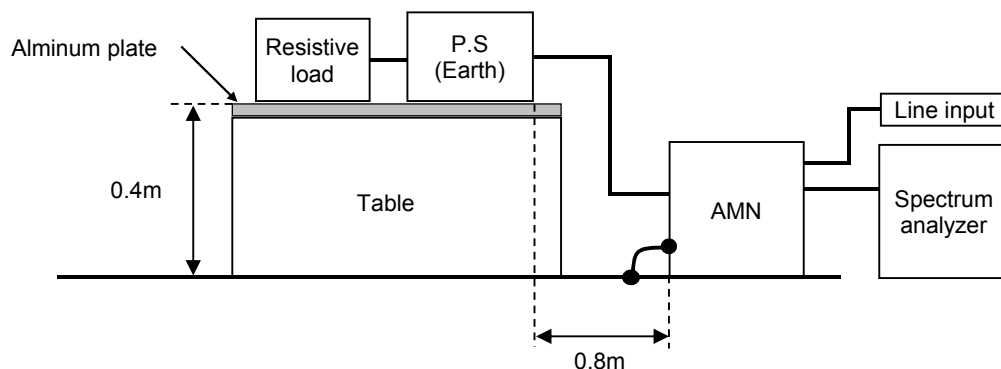

## 2. Radiated emission

