



| DATA SHEET | | Date | 11-May-18 |
|------------|--|-----------|------------|
| Model | GHA500F-24-SNF | Temp. | 25 degreeC |
| Test | EMI Line conduction & Radiated emission | Humid. | 40 %RH |
| | | Tested by | T. Nagai |

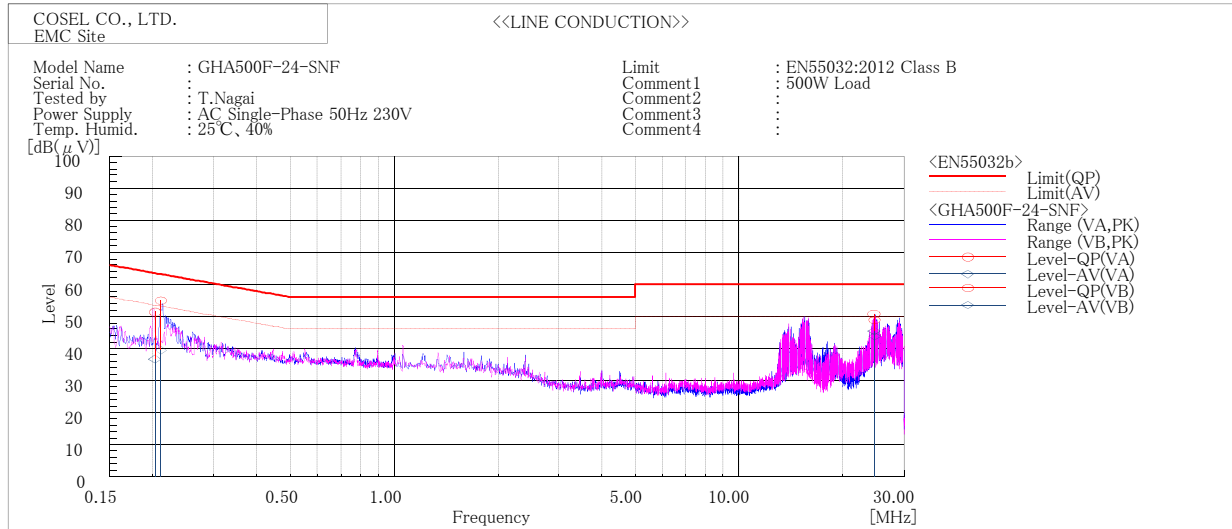


| Frequency MHz | Line Phase | Level dB(uV) | | Limit dB(uV) | | Margin dB | | Pass/Fail | Remark |
|------------------|---------------|--------------|------|--------------|------|-----------|------|-----------|--------|
| | | QP | AV | QP | AV | QP | AV | | |
| 0.20258 | VB | 51.3 | 36.7 | 63.5 | 53.5 | 12.2 | 16.8 | Pass | |
| 0.21106 | VA | 54.9 | 39.5 | 63.2 | 53.2 | 8.3 | 13.7 | Pass | |
| 24.64105 | VB | 50.7 | 45.4 | 60 | 50 | 9.3 | 4.6 | Pass | |
| 24.74455 | VB | 48.9 | 43.7 | 60 | 50 | 11.1 | 6.3 | Pass | |

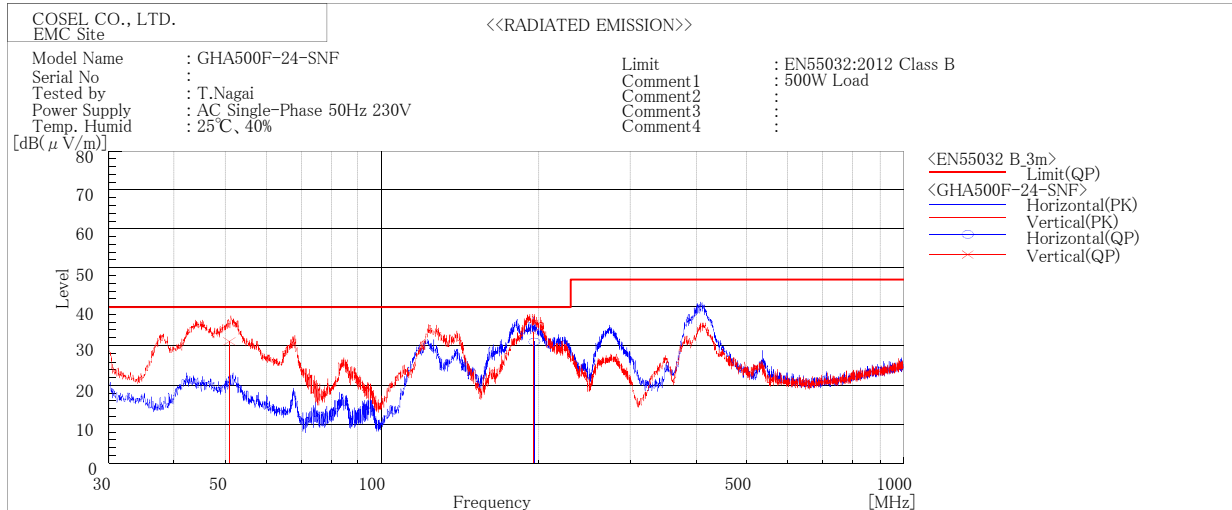

| Frequency MHz | Polarization | Stability | Reading dB(uV) | Limit dB(uV/m) | Margin dB(uV/m) | Pass/Fail | Height cm | Angle deg | Remark |
|------------------|--------------|-----------|-------------------|-------------------|--------------------|-----------|--------------|--------------|--------|
| | | | QP | QP | QP | | | | |
| 51.020 | V | Stable | 31.2 | 40.0 | 8.8 | Pass | 100 | 0 | |
| 194.911 | V | Stable | 33.5 | 40.0 | 6.5 | Pass | 103 | 167 | |
| 195.855 | H | Stable | 31.1 | 40.0 | 8.9 | Pass | 160 | 300 | |

| DATA SHEET | | Date | 11-May-18 |
|------------|--|-----------|------------|
| Model | Circuit used for measurement | Temp. | 25 degreeC |
| Test | EMI Line conduction & Radiated emission | Humid. | 40 %RH |
| | | Tested by | T. Nagai |

1. Line conduction

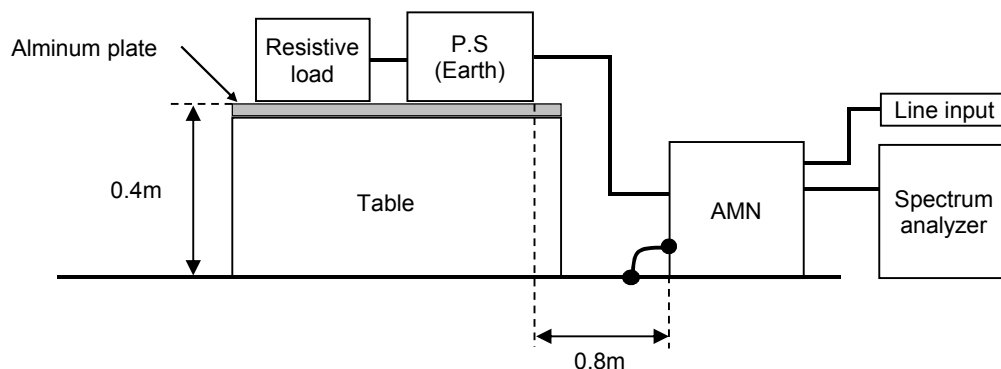

2. Radiated emission

