



DATA SHEET		Date	13-Jan-23
Model	GHA700F-48-J1	Temp.	21 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	25 %RH
		Tested by	K.Ikehata

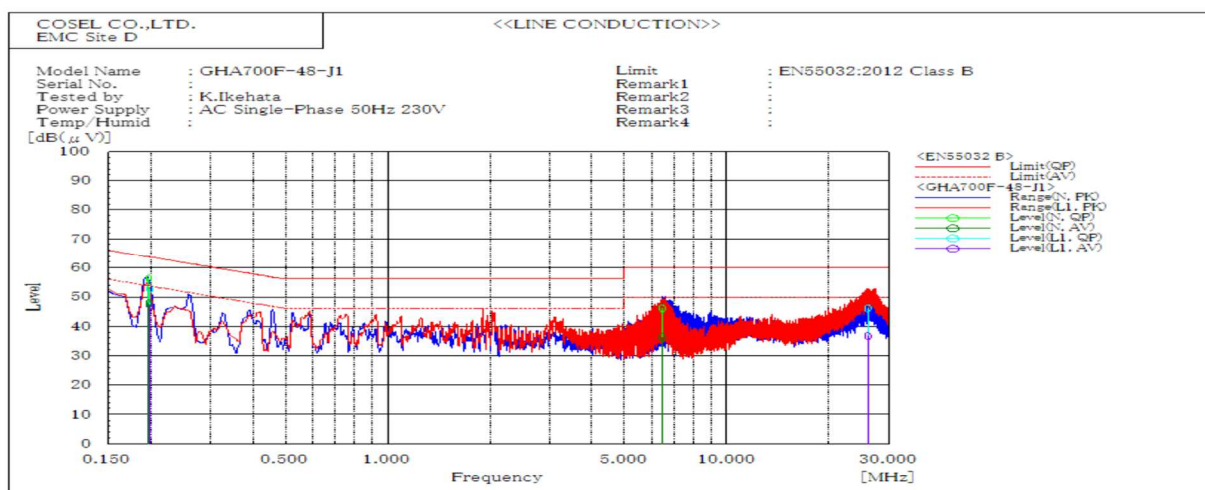


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	L1	52.8	47.2	63.7	53.7	10.9	6.5	Pass	
26.082	L1	46.2	36.8	60.0	50.0	13.8	13.2	Pass	
0.197	N	56.3	47.7	63.7	53.7	7.4	6.0	Pass	
6.456	N	46.2	36.3	60.0	50.0	13.8	13.7	Pass	

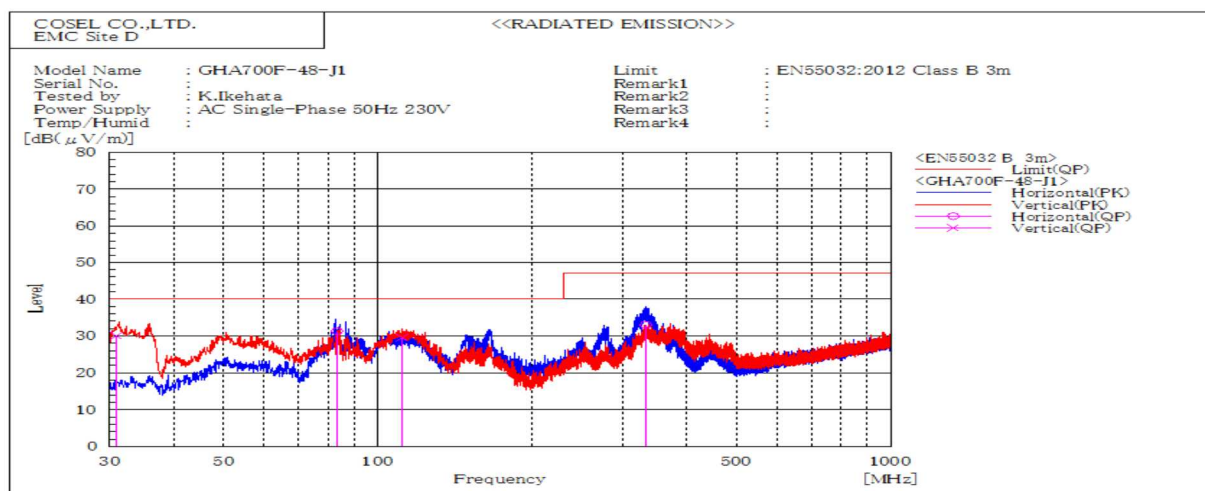


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
83.294	H	Stable	31.3	40.0	8.7	Pass	200.0	196.9	
333.316	H	Stable	33.0	47.0	14.0	Pass	100.2	341.6	
30.840	V	Stable	30.0	40.0	10.0	Pass	101.5	13.4	
111.601	V	Stable	29.6	40.0	10.4	Pass	101.5	77.0	

DATA SHEET		Date	13-Jan-23
Model	Circuit used for measurement	Temp.	21 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	25 %RH
		Tested by	K.Ikehata

1. Line conduction

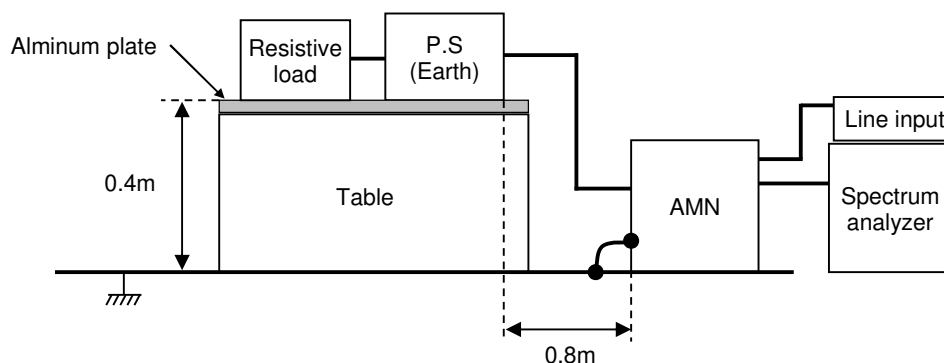

2. Radiated emission

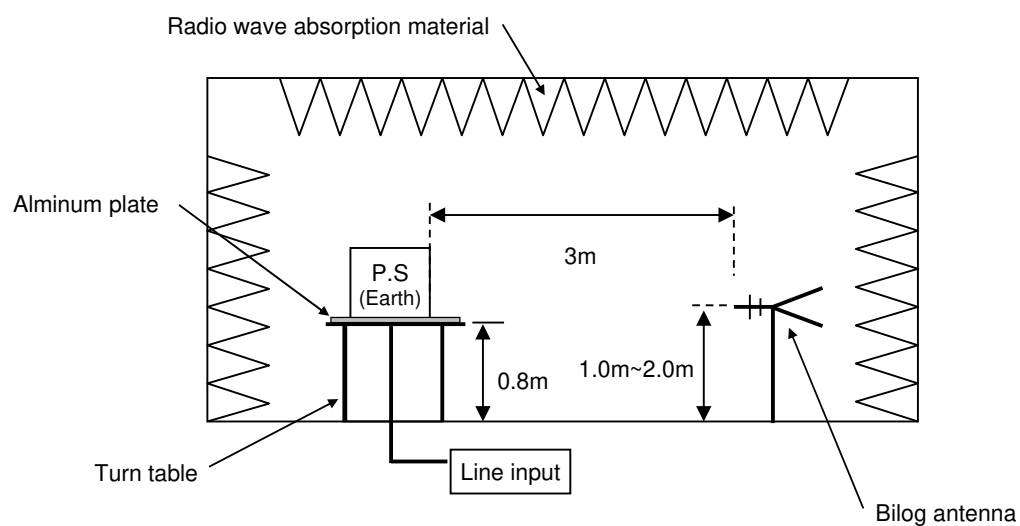

Conditions

Test : EMI
Model Name: GHA700F-48-J1

○Photographs of Test Set-Up

1.LINE CONDUCTION



2.RADIATED EMISSION

