



DATA SHEET		Date	19-Apr-23
Model	HCA3500TF-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Fukumura

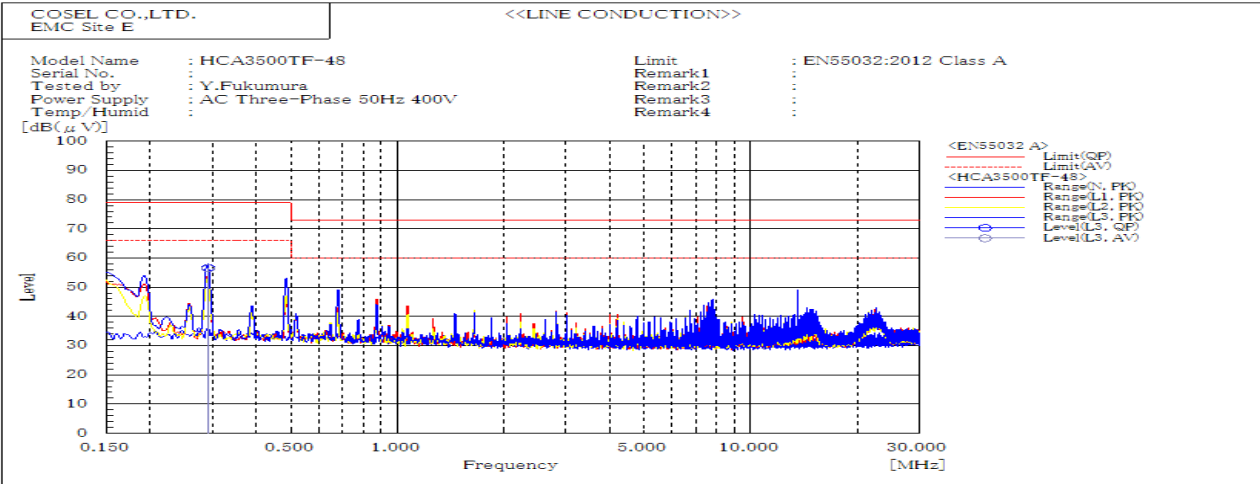


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.292	L3	56.6	56.5	79	66	22.4	9.5	Pass	

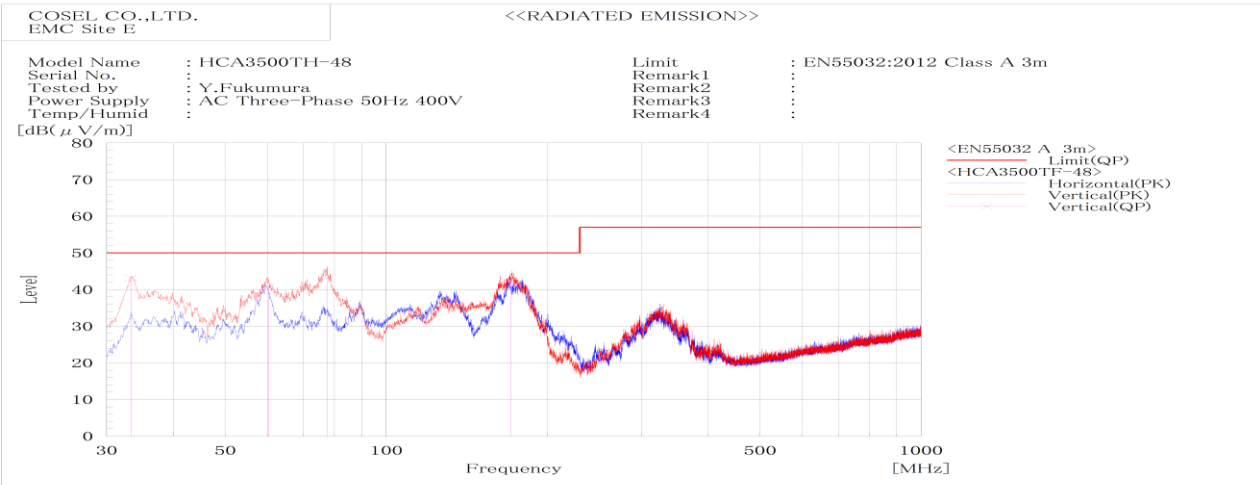


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
33.306	V	Stable	43.1	50	6.9	Pass	100	297.3	
60.273	V	Stable	40.7	50	9.3	Pass	100.2	292.4	
77.627	V	Stable	43.3	50	6.7	Pass	100.2	38.7	
170.788	V	Stable	41.7	50	8.3	Pass	100.4	121.9	

DATA SHEET		Date	19-Apr-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Fukumura

1. Line conduction

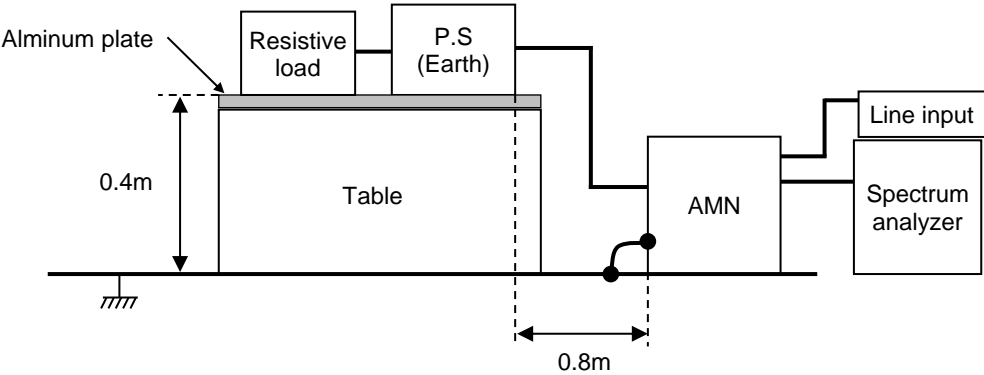

2. Radiated emission


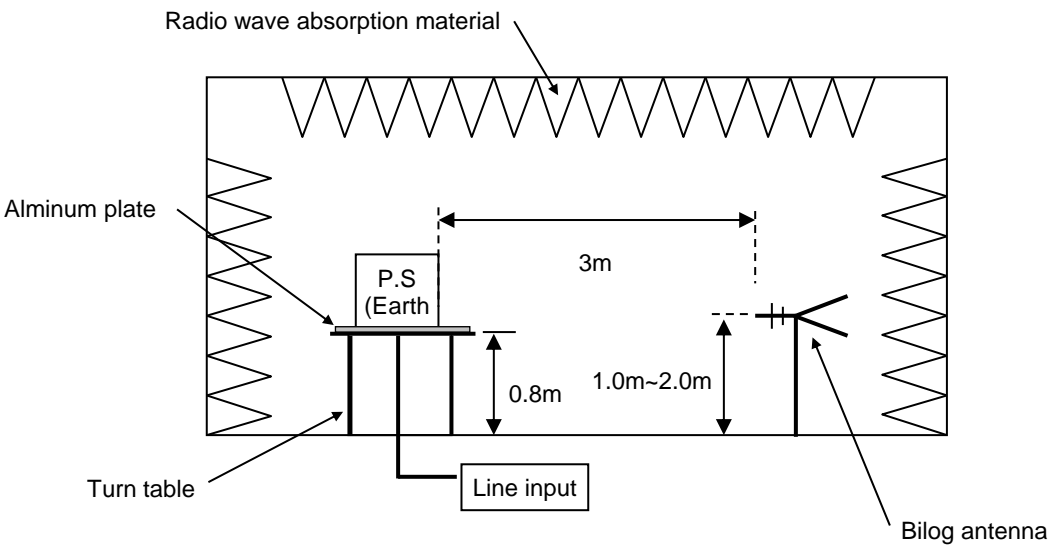


## Conditions

Test : EMI  
Model Nam: HCA3500TF-48

## Pthotographs of Test Set-Up

### 1.LINE CONDUCTION

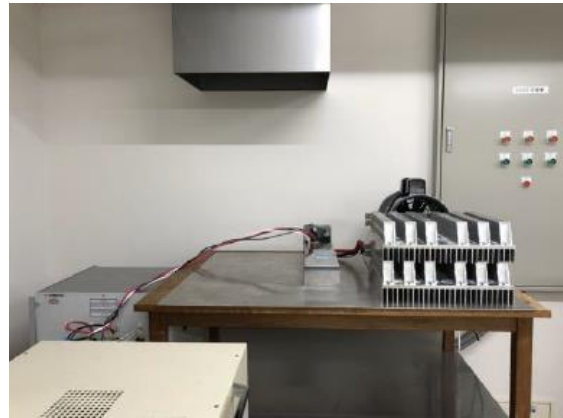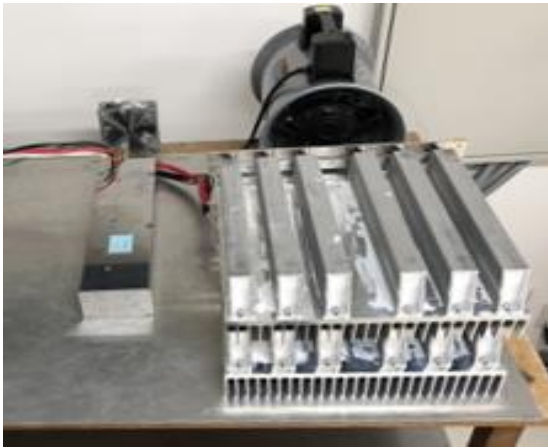

### 2.RADIATED EMISSION

