



DATA SHEET		Date	19-Apr-23
Model	HCA3500TF-65	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Fukumura

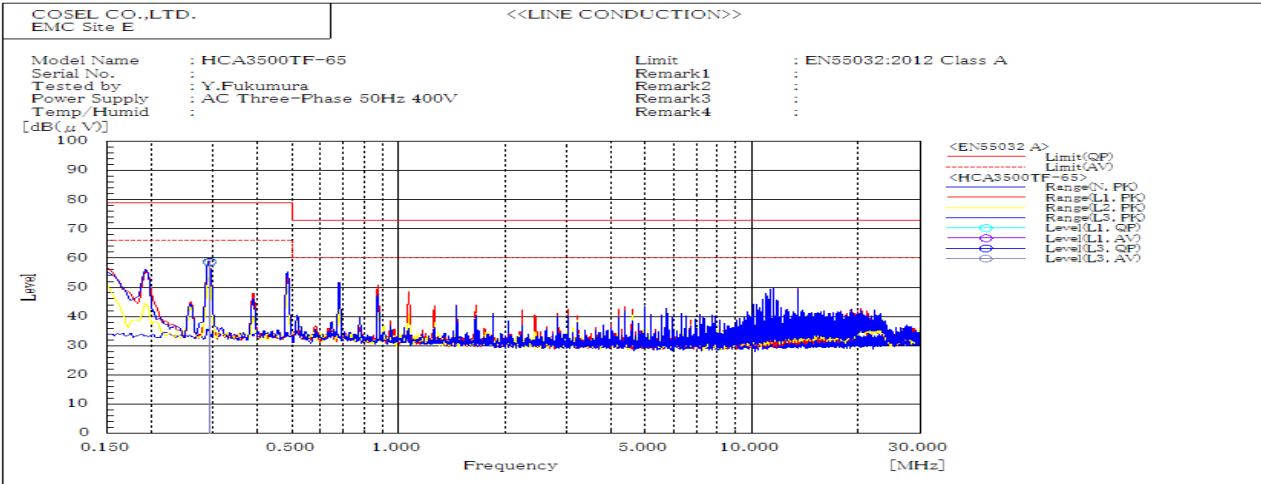


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.293	L3	58.6	58.5	79	66	20.4	7.5	Pass	
0.293	L1	58.8	58.6	79	66	20.2	7.4	Pass	

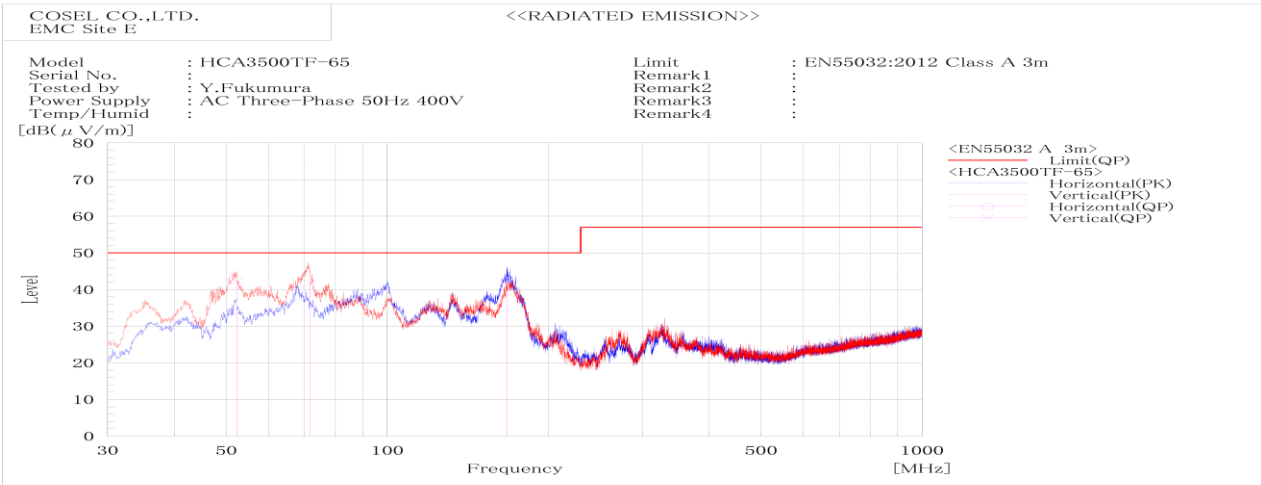


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
52.35	V	Stable	42.2	50	7.8	Pass	100.2	77	
71.654	V	Stable	41.8	50	8.2	Pass	100.2	0	
167.444	H	Stable	42.8	50	7.2	Pass	183.7	351.6	

DATA SHEET		Date	19-Apr-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Fukumura

1. Line conduction

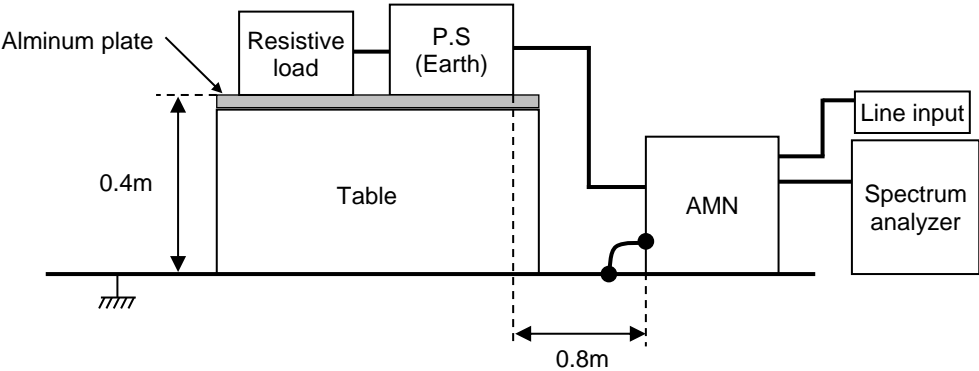

2. Radiated emission

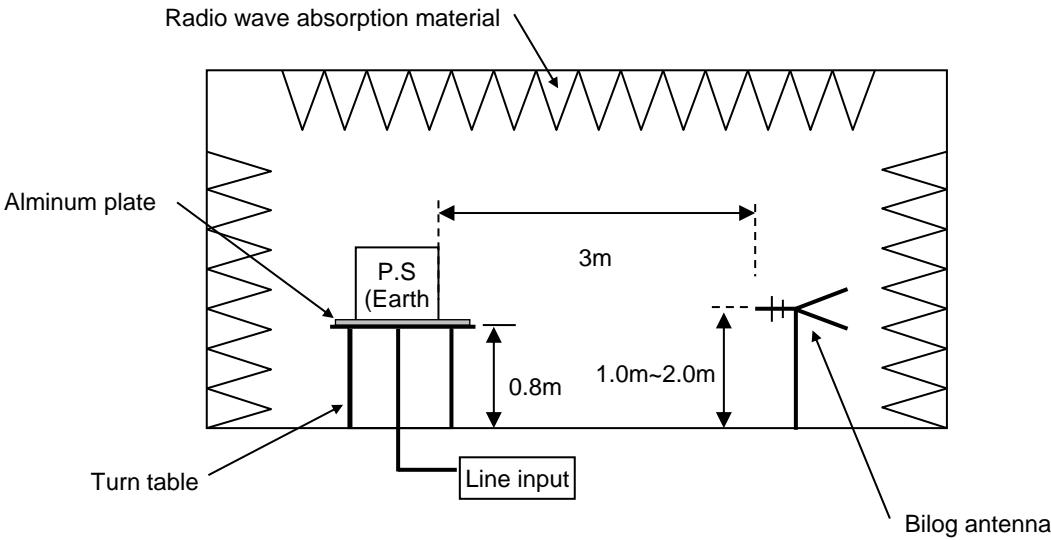


Conditions

Test : EMI
Model Nam: HCA3500TF-48

Pthotographs of Test Set-Up

1.LINE CONDUCTION

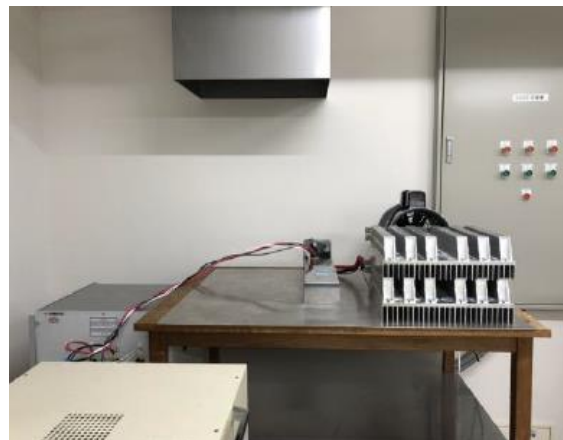

2.RADIATED EMISSION

