



# TEST DATA OF LDA100W-15 (200V INPUT)

Regulated DC Power Supply

Aug. 13, 1999

Approved by : H. Yamaguchi  
Design Manager

Prepared by : J. Asano  
Design Engineer

**コーセル株式会社**  
**COSEL CO., LTD.**

## CONTENTS

1. Line Regulation . . . . .	1
静的入力変動	
2. Input Current (by Load Current) . . . . .	2
入力電流 (負荷特性)	
3. Input Power (by Load Current) . . . . .	3
入力電力 (負荷特性)	
4. Efficiency (by Input Voltage) . . . . .	4
効率 (入力電圧特性)	
5. Efficiency (by Load Current) . . . . .	5
効率 (負荷特性)	
6. Hold-Up Time . . . . .	6
出力保持時間	
7. Instantaneous Interruption Compensation . . . . .	7
瞬時停電保障	
8. Load Regulation . . . . .	8
静的負荷変動	
9. Ripple Voltage (by Load Current) . . . . .	9
リップル電圧 (負荷特性)	
10. Ripple-Noise . . . . .	10
リップルノイズ	
11. Overcurrent Protection . . . . .	11
過電流保護	
12. Overvoltage Protection . . . . .	12
過電圧保護	
13. Inrush Current . . . . .	13
突入電流	
14. Dynamic Load Responce . . . . .	14
動的負荷変動	
15. Rise and Fall Time . . . . .	15
立上り、立下がり時間	
16. Ambient Temperature Drift . . . . .	16
周囲温度変動	
17. Minimum Input Voltage for Regulated Output Voltage . . . . .	17
最低レギュレーション電圧	
18. Ripple Voltage (by Ambient Temperature) . . . . .	18
リップル電圧 (周囲温度特性)	
19. Time Lapse Drift . . . . .	19
経時ドリフト	
20. Output Voltage Accuracy . . . . .	20
定電圧精度	
21. Condensation . . . . .	21
結露特性	
22. Leakage Current . . . . .	22
漏洩電流	
23. Line Noise Tolerance . . . . .	23
入力雑音耐量	
24. Conducted Emission . . . . .	24
雑音端子電圧	
25. Figure of Testing Circuitry . . . . .	25
測定回路図	

**COSEL**


Model LDA100W-15

Item Line Regulation 静的入力変動

Object +15.0V6.7A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

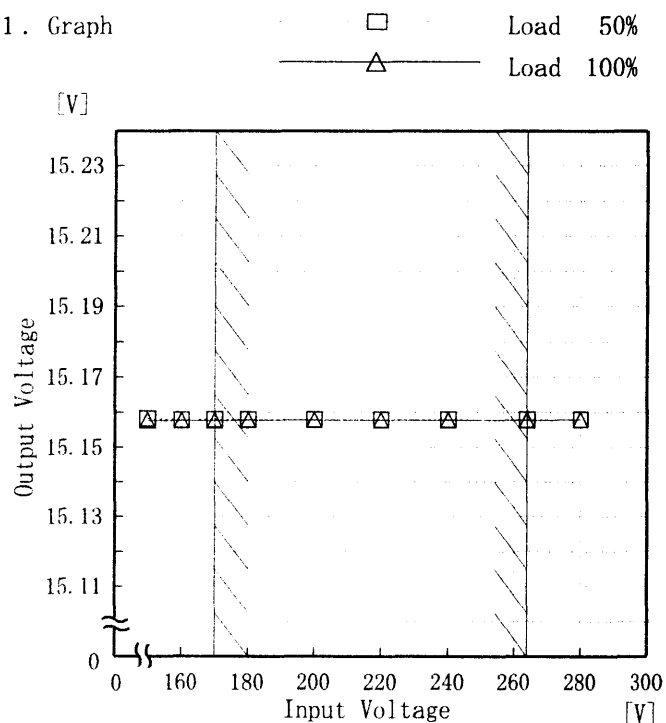

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

## 2. Values

Input Voltage [V]	Output Voltage [V]	
	Load 50%	Load 100%
150	15.158	15.158
160	15.158	15.158
170	15.158	15.158
180	15.158	15.158
200	15.158	15.158
220	15.158	15.158
240	15.158	15.158
264	15.158	15.158
280	15.158	15.158

# COSEL

Model	LDA100W-15	Temperature	25°C
Item	Input Current (by Load Current) 入力電流 (負荷特性)	Testing Circuitry	Figure A
Output	—		

1. Graph

△

—

Input Volt. 170V

□

—

Input Volt. 200V

○

—

Input Volt. 264V

Input Current [A]

2

1.5

1

0.5

0

0

2

4

6

8

Load Current [A]

Note: Slanted line shows the range of the rated load current

(注) 斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Input Current [A]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
0.00	0.071	0.078	0.093
1.00	0.265	0.247	0.226
2.00	0.447	0.404	0.349
3.00	0.633	0.567	0.477
4.00	0.817	0.729	0.608
5.00	1.005	0.895	0.742
6.00	1.186	1.056	0.872
6.70	1.316	1.172	0.967
7.37	1.431	1.275	1.052
—	—	—	—
—	—	—	—
—	—	—	—

# COSEL

Model		LDA100W-15		Temperature		25℃																																																								
Item		Input Power (by Load Current) 入力電力 (負荷特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div><div>—△—</div><div>Input Volt. 170V</div></div><div><div>—□—</div><div>Input Volt. 200V</div></div><div><div>—○—</div><div>Input Volt. 264V</div></div></div> <div><div><div>Input Power [W]</div><div>200</div><div>150</div><div>100</div><div>50</div><div>0</div></div><div><div>Load Current [A]</div><div>0</div><div>2</div><div>4</div><div>6</div><div>8</div></div></div> <div><div>Note: Slanted line shows the range of the rated load current</div><div>(注)斜線は定格負荷電流範囲を示す。</div></div>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>0.00</td><td>3.60</td><td>4.40</td><td>6.40</td></tr><tr><td>1.00</td><td>21.80</td><td>22.90</td><td>25.50</td></tr><tr><td>2.00</td><td>39.00</td><td>39.90</td><td>42.40</td></tr><tr><td>3.00</td><td>55.80</td><td>56.70</td><td>59.10</td></tr><tr><td>4.00</td><td>72.80</td><td>73.50</td><td>75.80</td></tr><tr><td>5.00</td><td>90.40</td><td>91.00</td><td>93.10</td></tr><tr><td>6.00</td><td>107.70</td><td>108.10</td><td>110.00</td></tr><tr><td>6.70</td><td>120.50</td><td>120.80</td><td>122.50</td></tr><tr><td>7.37</td><td>132.10</td><td>132.20</td><td>133.90</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr></table>				Load Current [A]	Input Power [W]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	3.60	4.40	6.40	1.00	21.80	22.90	25.50	2.00	39.00	39.90	42.40	3.00	55.80	56.70	59.10	4.00	72.80	73.50	75.80	5.00	90.40	91.00	93.10	6.00	107.70	108.10	110.00	6.70	120.50	120.80	122.50	7.37	132.10	132.20	133.90	---	---	---	---	---	---	---	---	---	---	---	---
Load Current [A]	Input Power [W]																																																													
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
0.00	3.60	4.40	6.40																																																											
1.00	21.80	22.90	25.50																																																											
2.00	39.00	39.90	42.40																																																											
3.00	55.80	56.70	59.10																																																											
4.00	72.80	73.50	75.80																																																											
5.00	90.40	91.00	93.10																																																											
6.00	107.70	108.10	110.00																																																											
6.70	120.50	120.80	122.50																																																											
7.37	132.10	132.20	133.90																																																											
---	---	---	---																																																											
---	---	---	---																																																											
---	---	---	---																																																											

**COSEL**

Model LDA100W-15		Temperature 25°C Testing Circuitry Figure A																																
Item	Efficiency 効率																																	
Object																																		
<p>1. Graph</p> <p>□ Load 50% △ Load 100%</p> <p>Efficiency [%]</p> <p>Input Voltage [V]</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th rowspan="2">Input Voltage [V]</th><th colspan="2">Efficiency [%]</th></tr> <tr> <th>Load 50%</th><th>Load 100%</th></tr> </thead> <tbody> <tr><td>150</td><td>83.5</td><td>85.0</td></tr> <tr><td>160</td><td>83.0</td><td>85.1</td></tr> <tr><td>170</td><td>82.5</td><td>85.0</td></tr> <tr><td>180</td><td>82.1</td><td>84.9</td></tr> <tr><td>200</td><td>81.0</td><td>84.7</td></tr> <tr><td>220</td><td>80.3</td><td>84.3</td></tr> <tr><td>240</td><td>79.0</td><td>84.0</td></tr> <tr><td>264</td><td>78.0</td><td>83.5</td></tr> <tr><td>280</td><td>76.5</td><td>82.9</td></tr> </tbody> </table>	Input Voltage [V]	Efficiency [%]		Load 50%	Load 100%	150	83.5	85.0	160	83.0	85.1	170	82.5	85.0	180	82.1	84.9	200	81.0	84.7	220	80.3	84.3	240	79.0	84.0	264	78.0	83.5	280	76.5	82.9
Input Voltage [V]	Efficiency [%]																																	
	Load 50%	Load 100%																																
150	83.5	85.0																																
160	83.0	85.1																																
170	82.5	85.0																																
180	82.1	84.9																																
200	81.0	84.7																																
220	80.3	84.3																																
240	79.0	84.0																																
264	78.0	83.5																																
280	76.5	82.9																																

**COSEL**

Model		LDA100W-15		Temperature		25℃																																																								
Item		Efficiency (by Load Current) 効率 (負荷電流特性)		Testing Circuitry		Figure A																																																								
Output		_____																																																												
1. Graph				2. Values																																																										
<div><div>△</div> Input Volt. 170V</div> <div><div>□</div> Input Volt. 200V</div> <div><div>○</div> Input Volt. 264V</div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>1.00</td><td>71.2</td><td>67.9</td><td>61.1</td></tr><tr><td>2.00</td><td>79.0</td><td>77.3</td><td>72.6</td></tr><tr><td>3.00</td><td>82.2</td><td>80.8</td><td>77.6</td></tr><tr><td>4.00</td><td>83.6</td><td>82.8</td><td>80.3</td></tr><tr><td>5.00</td><td>84.4</td><td>83.9</td><td>82.0</td></tr><tr><td>6.00</td><td>84.8</td><td>84.5</td><td>83.1</td></tr><tr><td>6.70</td><td>85.0</td><td>84.7</td><td>83.5</td></tr><tr><td>7.37</td><td>84.9</td><td>84.9</td><td>83.8</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr><tr><td>---</td><td>---</td><td>---</td><td>---</td></tr></table>				Load Current [A]	Efficiency [%]			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	1.00	71.2	67.9	61.1	2.00	79.0	77.3	72.6	3.00	82.2	80.8	77.6	4.00	83.6	82.8	80.3	5.00	84.4	83.9	82.0	6.00	84.8	84.5	83.1	6.70	85.0	84.7	83.5	7.37	84.9	84.9	83.8	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---
Load Current [A]	Efficiency [%]																																																													
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																											
1.00	71.2	67.9	61.1																																																											
2.00	79.0	77.3	72.6																																																											
3.00	82.2	80.8	77.6																																																											
4.00	83.6	82.8	80.3																																																											
5.00	84.4	83.9	82.0																																																											
6.00	84.8	84.5	83.1																																																											
6.70	85.0	84.7	83.5																																																											
7.37	84.9	84.9	83.8																																																											
---	---	---	---																																																											
---	---	---	---																																																											
---	---	---	---																																																											
---	---	---	---																																																											

# COSEL

Model		LDA100W-15		Temperature		25℃																																	
Item		Hold-Up Time 出力保持時間		Testing Circuitry		Figure A																																	
Object		+15.0V6.7A																																					
1. Graph				2. Values																																			
<div><div>□ Load 50%</div><div>—△— Load 100%</div></div> <p>Hold-Up Time [mS]</p> <p>Input Voltage [V]</p>				<table><tr><th rowspan="2">Input Voltage [V]</th><th colspan="2">Hold-Up Time [mS]</th></tr><tr><th>Load 50%</th><th>Load 100%</th></tr><tr><td>150</td><td>33</td><td>15</td></tr><tr><td>160</td><td>40</td><td>18</td></tr><tr><td>170</td><td>47</td><td>22</td></tr><tr><td>180</td><td>54</td><td>25</td></tr><tr><td>200</td><td>71</td><td>34</td></tr><tr><td>220</td><td>89</td><td>43</td></tr><tr><td>240</td><td>109</td><td>53</td></tr><tr><td>264</td><td>135</td><td>66</td></tr><tr><td>280</td><td>154</td><td>76</td></tr></table>				Input Voltage [V]	Hold-Up Time [mS]		Load 50%	Load 100%	150	33	15	160	40	18	170	47	22	180	54	25	200	71	34	220	89	43	240	109	53	264	135	66	280	154	76
Input Voltage [V]	Hold-Up Time [mS]																																						
	Load 50%	Load 100%																																					
150	33	15																																					
160	40	18																																					
170	47	22																																					
180	54	25																																					
200	71	34																																					
220	89	43																																					
240	109	53																																					
264	135	66																																					
280	154	76																																					
<p>This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.</p> <p>Note: Slanted line shows the range of the rated input voltage.</p> <p>出力保持時間とは、入力電圧断から出力電圧が、定電圧精度の規格範囲を保持しているところまでの時間。</p> <p>(注)斜線は定格入力電圧範囲を示す。</p>																																							



# COSEL

Model	LDA100W-15	Temperature	25°C
Item	Instantaneous Interruption Compensation 瞬時停電保障	Testing Circuitry	Figure A
Object	+15.0V6.7A		

1. Graph

△

Input Volt. 170 V

□

Input Volt. 200 V

○

Input Volt. 264 V

Instantaneous Compensation Time [mS]

1000

100

10

1

0

2

4

6

8

Load Current [A]

This duration covers from Shut-off of input voltage to the moment when output voltage descends to the rated range of voltage accuracy.

Note: Slanted line shows the range of the rated load current.


瞬時停電保障時間とは、出力電圧が定電圧精度の規格範囲を保持している瞬時停電時間をいう。

(注)斜線は定格負荷電流範囲を示す。

2. Values

Load Current [A]	Time [mS]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
0.00	—	—	—
1.00	138	207	389
2.00	73	112	214
3.00	48	73	147
4.00	36	56	112
5.00	28	45	89
6.00	23	37	73
6.70	20	31	65
7.37	15	29	60
—	—	—	—
—	—	—	—

**COSEL**

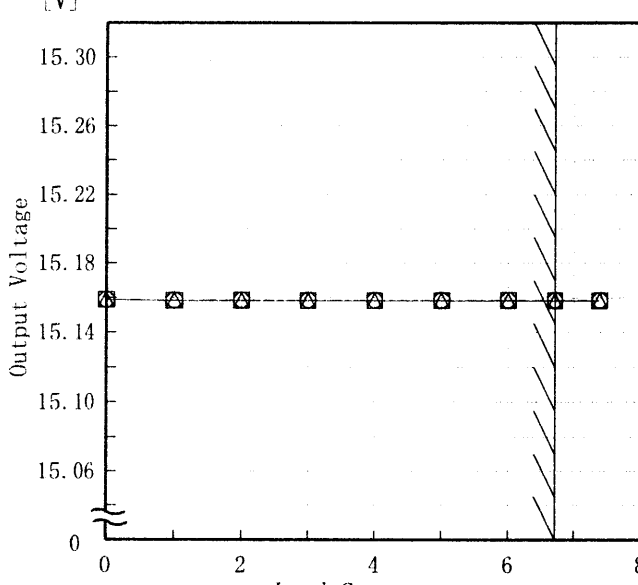Model		LDA100W-15		Temperature		25℃																																																
Item		Load Regulation 静的負荷変動		Testing Circuitry		Figure A																																																
Object		+15.0V6.7A																																																				
1. Graph				2. Values																																																		
<div><div><div>△</div><div>□</div><div>○</div></div><div>Input Volt.170 V Input Volt.200 V Input Volt.264 V</div></div>  <p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>				<table><tr><th rowspan="2">Load Current</th><th colspan="3">Output Voltage</th></tr><tr><th>Input Volt. 170[V]</th><th>Input Volt. 200[V]</th><th>Input Volt. 264[V]</th></tr><tr><td>0.00</td><td>15.159</td><td>15.159</td><td>15.159</td></tr><tr><td>1.00</td><td>15.158</td><td>15.158</td><td>15.158</td></tr><tr><td>2.00</td><td>15.158</td><td>15.158</td><td>15.159</td></tr><tr><td>3.00</td><td>15.158</td><td>15.158</td><td>15.158</td></tr><tr><td>4.00</td><td>15.158</td><td>15.158</td><td>15.158</td></tr><tr><td>5.00</td><td>15.158</td><td>15.158</td><td>15.159</td></tr><tr><td>6.00</td><td>15.158</td><td>15.158</td><td>15.158</td></tr><tr><td>6.70</td><td>15.158</td><td>15.158</td><td>15.159</td></tr><tr><td>7.37</td><td>15.158</td><td>15.158</td><td>15.158</td></tr><tr><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>				Load Current	Output Voltage			Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]	0.00	15.159	15.159	15.159	1.00	15.158	15.158	15.158	2.00	15.158	15.158	15.159	3.00	15.158	15.158	15.158	4.00	15.158	15.158	15.158	5.00	15.158	15.158	15.159	6.00	15.158	15.158	15.158	6.70	15.158	15.158	15.159	7.37	15.158	15.158	15.158	—	—	—	—
Load Current	Output Voltage																																																					
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]																																																			
0.00	15.159	15.159	15.159																																																			
1.00	15.158	15.158	15.158																																																			
2.00	15.158	15.158	15.159																																																			
3.00	15.158	15.158	15.158																																																			
4.00	15.158	15.158	15.158																																																			
5.00	15.158	15.158	15.159																																																			
6.00	15.158	15.158	15.158																																																			
6.70	15.158	15.158	15.159																																																			
7.37	15.158	15.158	15.158																																																			
—	—	—	—																																																			

# COSEL

LOREL

Model	LDA100W-15
Item	Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)
Object	+15.0V6.7A

1. Graph

-----□-----

Input Volt. 170V

———△———

Input Volt. 264V

[mV]

150

125

100

75

50

25

0

Ripple Voltage

0

2

4

6

8

Load Current

[A]

2.Values

Load Current [A]	Input Volt. 170 [V]	Input Volt. 264 [V]
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]
0.00	10	10
1.00	20	20
2.00	20	20
3.00	20	25
4.00	25	25
5.00	25	25
6.00	25	25
6.70	25	30
7.00	30	30
7.40	30	30
—	—	—

Ripple Voltage is shown as p-p in the figure below.

Note: Slanted line shows the range of the rated load current.

リップル電圧は、下図 p－p 値で示される。

(注) 斜線は定格負荷電流範囲を示す。

T1: Due to AC Input Line  
入力商用周期

T2: Due to Switching  
スイッチング周期


←T2→

←T1→

Ripple [mVp-p]

Fig. Complex Ripple Wave Form

図 リップル波形詳細図

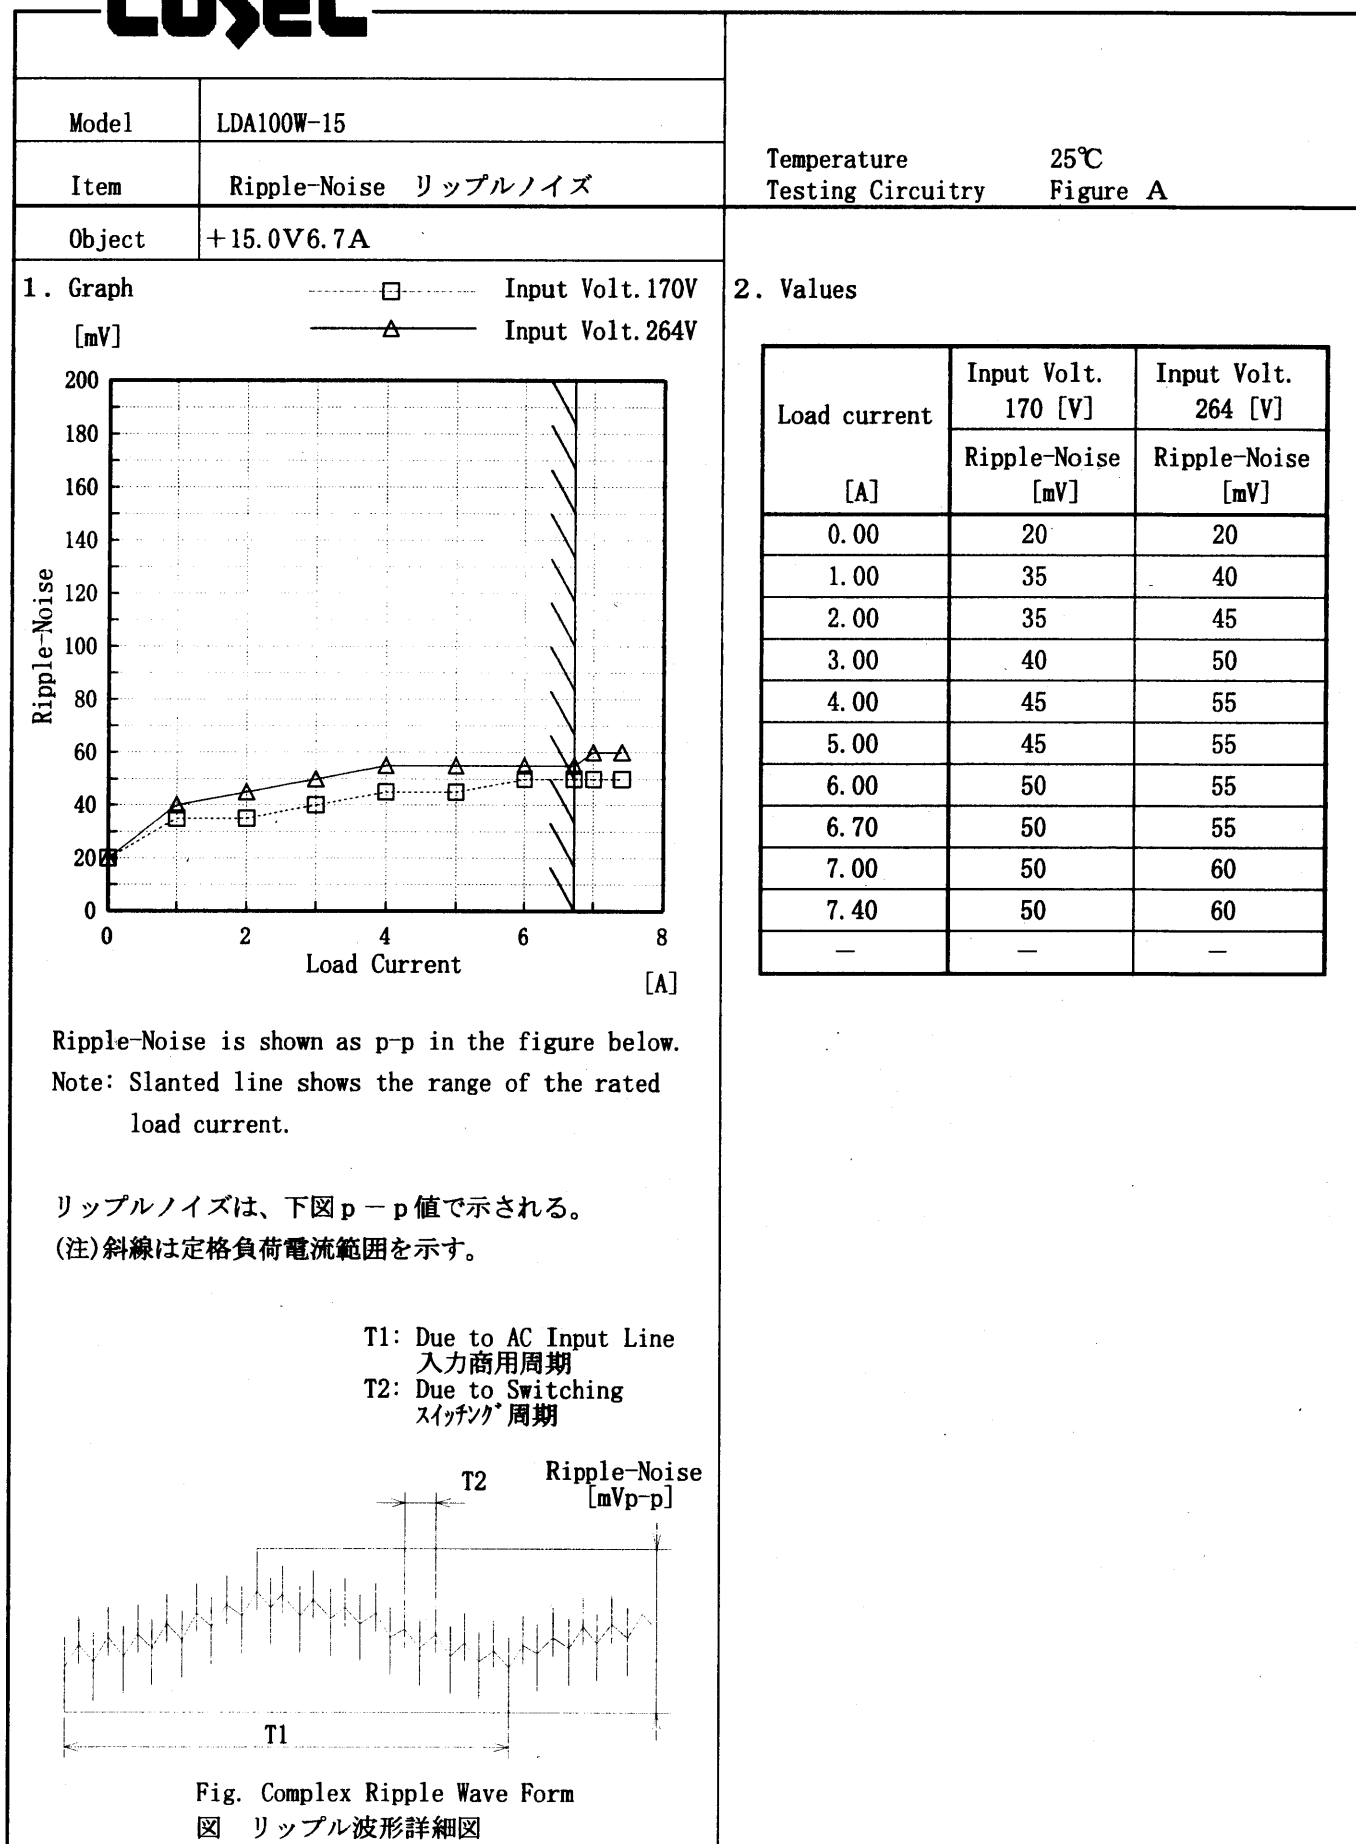**COSEL**

**COSEL**

Model		LDA100W-15	Temperature25℃ Testing CircuitryFigure A
Item		Overcurrent Protection 過電流保護	
Object		+15.0V6.7A	

1. Graph

Input Volt. 170 V

Input Volt. 200 V

Input Volt. 264 V

[V]

20.0

15.0

10.0

5.0

0.0

0

2

4

6

8

10

12

Output Voltage

Load Current

[A]

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Load Current [A]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
15.00	8.86	8.87	9.01
14.25	8.90	8.93	9.08
13.50	8.95	8.98	9.15
12.00	9.06	9.10	9.26
10.50	9.20	9.22	9.38
9.00	9.30	9.38	9.43
7.50	9.37	9.44	9.63
6.00	9.47	9.54	9.76
4.50	9.57	9.64	9.92
3.00	9.67	9.74	9.96
1.50	9.56	9.50	9.62
0.00	8.91	8.90	8.93

# COSEL


Model LDA100W-15

Item Overvoltage Protection  
過電圧保護

Object +15.0V 6.7A

Testing Circuitry Figure A

## 1. Graph

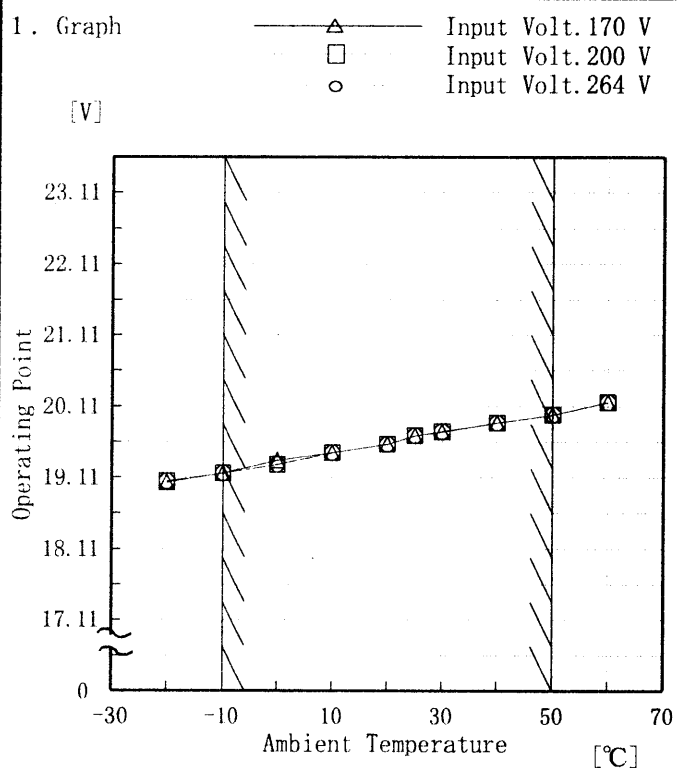


## 2. Values


Ambient Temperature [°C]	Operating Point [V]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
-20	19.04	19.05	19.05
-10	19.17	19.17	19.17
0	19.35	19.29	19.29
10	19.46	19.46	19.46
20	19.58	19.58	19.58
25	19.70	19.70	19.70
30	19.75	19.76	19.76
40	19.88	19.88	19.88
50	19.99	19.99	19.99
60	20.17	20.17	20.17
—	—	—	—

# COSEL

Model	LDA100W-15	Temperature 25°C Testing Circuitry Figure A
Item	Inrush Current 突入電流	
Object	_____	

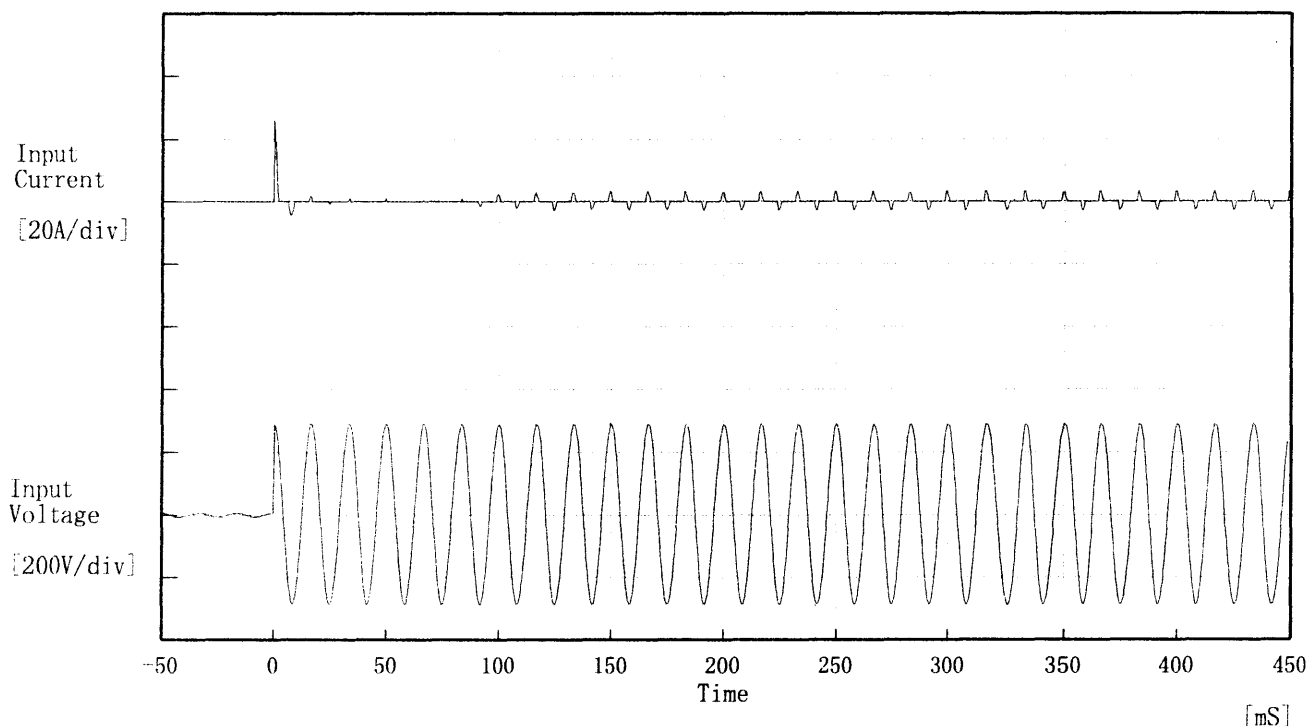

Input Voltage 200 V  
 Frequency 60 Hz  
 Load 100 %  
 Inrush Current  
 ① 25.99 [A]  
 ② 3.19 [A]

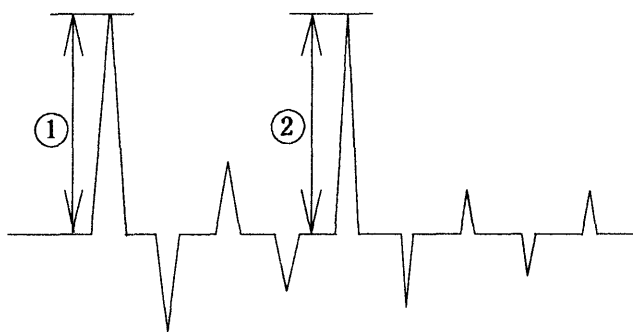

**COSEL**

Model	LDA100W-15	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Responce 動的負荷変動	
Object	+15.0V6.7A	



Input Volt. 200 V

Cycle 1000 mS

Load Current



Load 0% ↔

Load 100 %

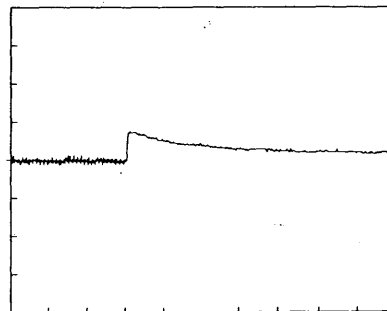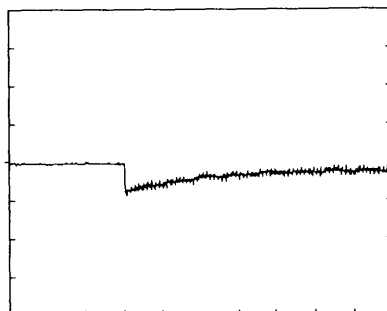

Load 0% ↔

Load 50 %

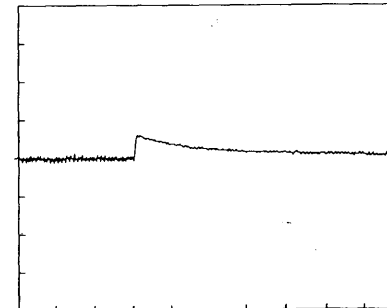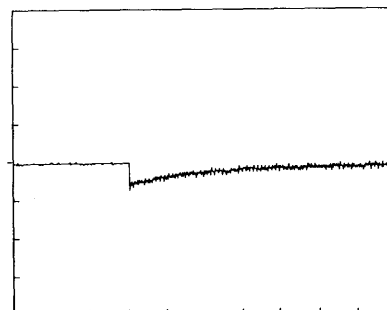

100 mV/div

10 mS/div




**COSEL**

Model	LDA100W-15	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+15.0V6.7A		

## 1. Graph


Input Volt. 170 V

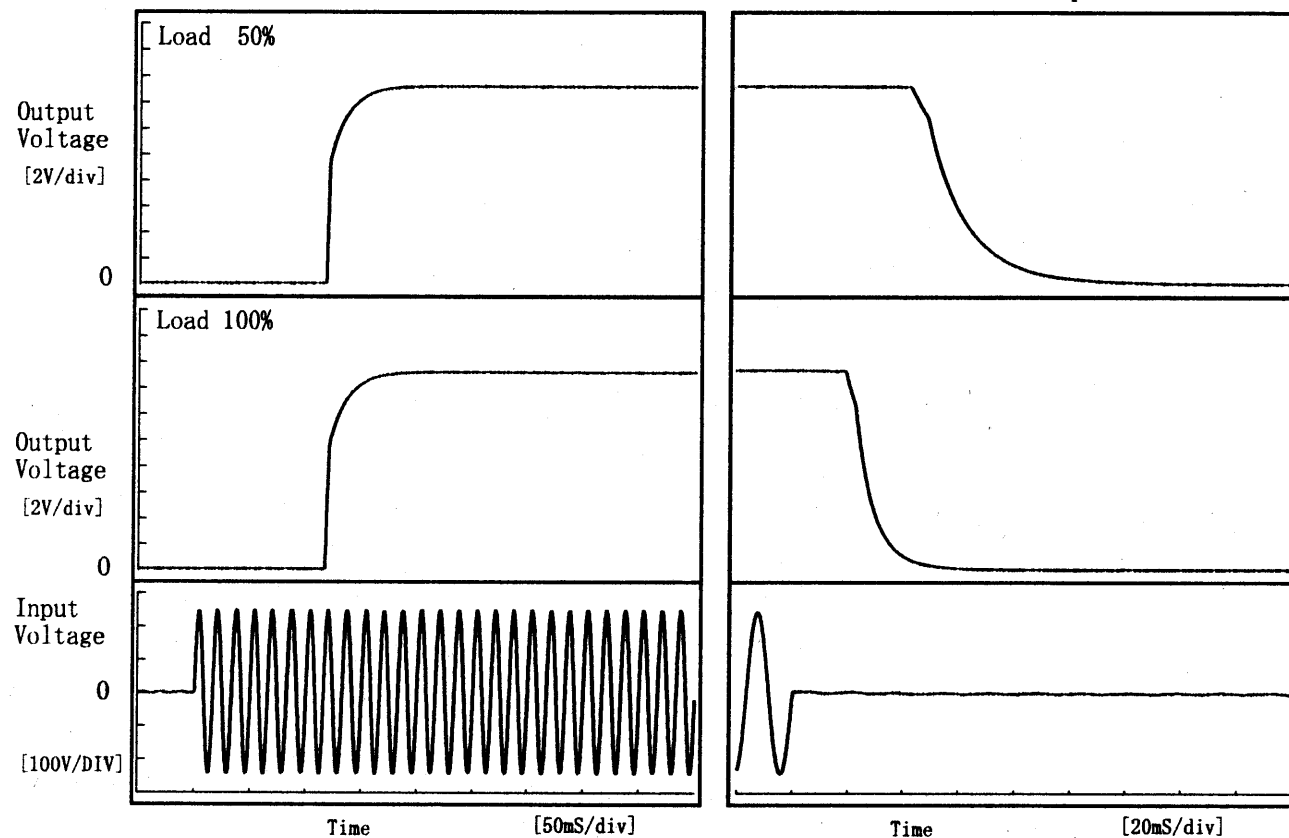

## 2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	117.8	22.3	140.0	46.6	32.7
100 %	117.8	22.8	140.5	21.5	16.3

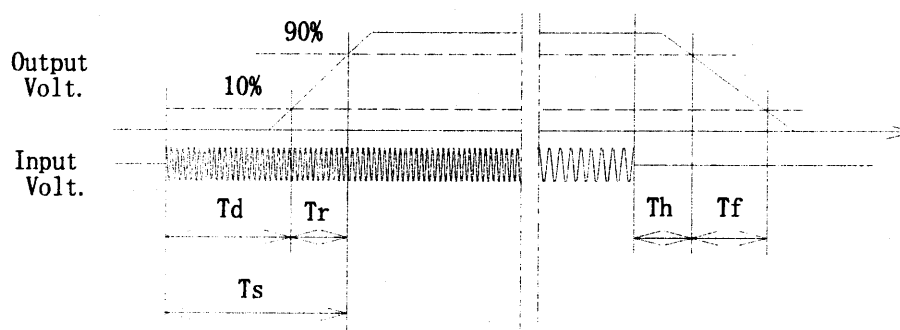

# COSEL


Model LDA100W-15

Item Ambient Temperature Drift  
周囲温度変動

Object +15.0V6.7A

Testing Circuitry Figure A

## 1. Graph

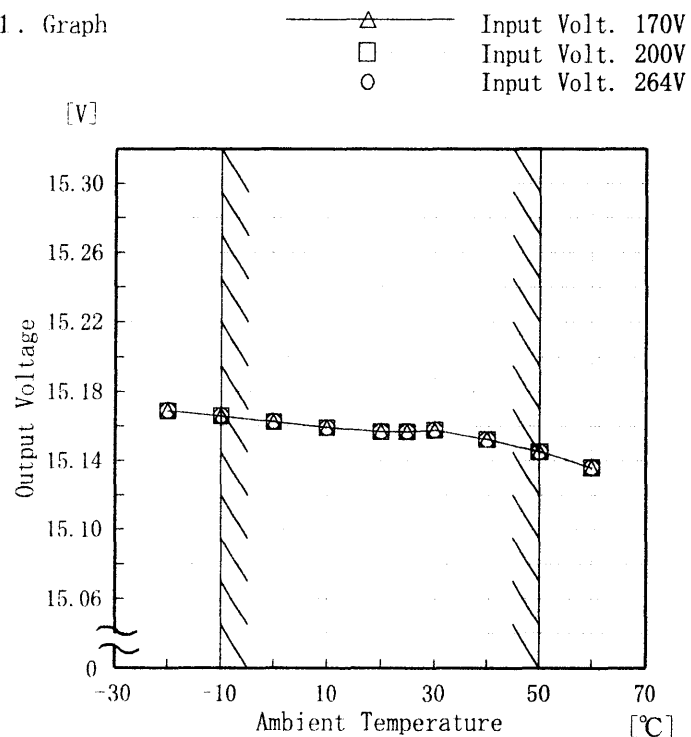

Note: Slanted line shows the range of the rated ambient temperature.

(注) 斜線は定格周囲温度範囲を示す。

## 2. Values

Temperature [°C]	Output Voltage [V]		
	Input Volt. 170[V]	Input Volt. 200[V]	Input Volt. 264[V]
-20	15.169	15.169	15.169
-10	15.166	15.166	15.166
0	15.162	15.163	15.163
10	15.159	15.159	15.159
20	15.157	15.157	15.157
25	15.157	15.157	15.157
30	15.158	15.158	15.158
40	15.152	15.152	15.152
50	15.145	15.145	15.145
60	15.136	15.136	15.136
—	—	—	—

# COSEL

Model LDA100W-15

Item Minimum Input Voltage for Regulated Output Voltage  
最低レギュレーション電圧

Object +15.0V6.7A

Testing Circuitry Figure A

## 1. Graph


[V]

□

Load 50%

—△—

Load 100%

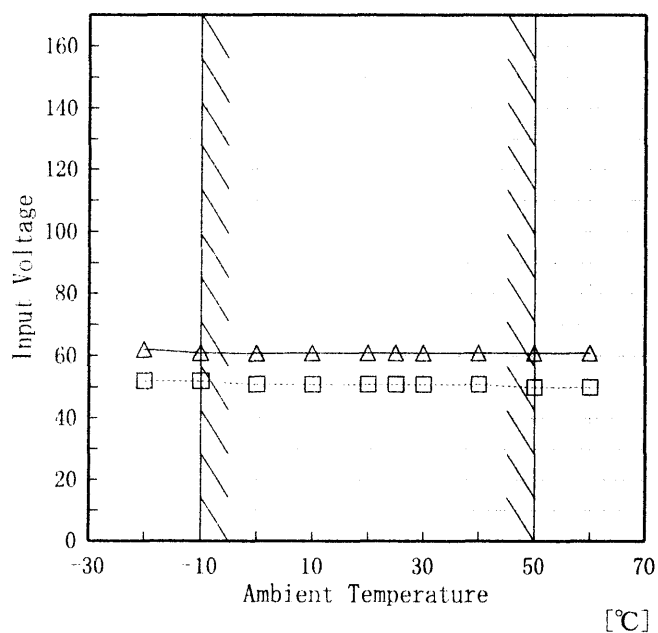

Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

## 2. Values

Ambient Temperature [°C]	Input Voltage [V]	
	Load 50%	Load 100%
-20	52	62
-10	52	61
0	51	61
10	51	61
20	51	61
25	51	61
30	51	61
40	51	61
50	50	61
60	50	61
—	—	—

# COSEL

Model LDA100W-15		Testing Circuitry      Figure A																																				
Item	Ripple Voltage (by Ambient Temp.) リップル電圧 (周囲温度特性)																																					
Object	+15.0V 6.7A																																					
<p>1. Graph</p> <p>□ Load 50% △ Load 100%</p> <p>[mV]</p> <p>Ripple Voltage</p> <p>Ambient Temperature [°C]</p> <p>Input Volt. 200 V</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p> <p>(注) 斜線は定格周囲温度範囲を示す。</p>		<p>2. Values</p> <table border="1"> <thead> <tr> <th>Ambient Temp. [°C]</th><th>Load 50% Ripple Output Volt. [mV]</th><th>Load 100% Ripple Output Volt. [mV]</th></tr> </thead> <tbody> <tr><td>-20</td><td>40</td><td>50</td></tr> <tr><td>-10</td><td>35</td><td>40</td></tr> <tr><td>0</td><td>25</td><td>30</td></tr> <tr><td>10</td><td>25</td><td>30</td></tr> <tr><td>20</td><td>20</td><td>25</td></tr> <tr><td>25</td><td>20</td><td>25</td></tr> <tr><td>30</td><td>20</td><td>25</td></tr> <tr><td>40</td><td>20</td><td>25</td></tr> <tr><td>50</td><td>20</td><td>25</td></tr> <tr><td>60</td><td>20</td><td>25</td></tr> <tr><td>—</td><td>—</td><td>—</td></tr> </tbody> </table>	Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]	-20	40	50	-10	35	40	0	25	30	10	25	30	20	20	25	25	20	25	30	20	25	40	20	25	50	20	25	60	20	25	—	—	—
Ambient Temp. [°C]	Load 50% Ripple Output Volt. [mV]	Load 100% Ripple Output Volt. [mV]																																				
-20	40	50																																				
-10	35	40																																				
0	25	30																																				
10	25	30																																				
20	20	25																																				
25	20	25																																				
30	20	25																																				
40	20	25																																				
50	20	25																																				
60	20	25																																				
—	—	—																																				

**COSEL**


Model LDA100W-15

Item Time Lapse Drift 経時ドリフト

Object +15.0V6.7A

Temperature 25°C  
Testing Circuitry Figure A

## 1. Graph

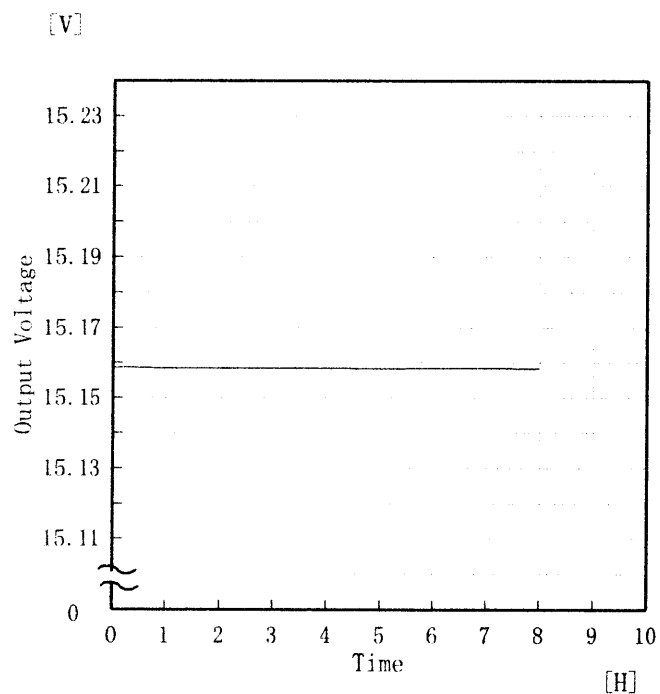

## 2. Values

Time since start [H]	Output Voltage [V]
0.0	15.159
0.5	15.159
1.0	15.158
2.0	15.158
3.0	15.158
4.0	15.158
5.0	15.158
6.0	15.158
7.0	15.158
8.0	15.158

**COSEL**

Model		LDA100W-15	Testing Circuitry Figure A
Item		Output Voltage Accuracy 定電圧精度	
Object		±15.0V6.7A	

## Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -10~50 °C

Input Voltage : 170~264 V

Load Current : 0~6.7 A

\* Output Voltage Accuracy =  $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

\* Output Voltage Accuracy (Ration) =  $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

## 定電圧精度

周囲温度、入力電圧、負荷電流を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 : -10~50 °C

入力電圧 : 170~264 V

負荷電流 : 0~6.7 A

\* 定電圧精度(変動値) =  $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

\* 定電圧精度(変動率) =  $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy (Ration) [%]
Maximum Voltage	-10	264	0.0	15.167	±11	±0.1
Minimum Voltage	50	264	6.7	15.145		

Model		LDA100W-15	Testing Circuitry	Figure A
Item		Condensation 結露特性		
Object		+15.0V6.7A		
1. Condensation test				
Testing procedure is as follows.				
① Keeping and cooling the unit in a tank at -10℃ for an hour with the input off.				
② Taking it out of the tank and dewing itself in a room where the temperature is 25℃ and the humidity is 40%RH.				
③ Testing electrical characteristics of the unit to confirm there be no fault.				
1. 結露特性試験				
入力を切った状態で、恒温槽で-10℃に冷却しておき、約1時間後に恒温槽から取り出し、室温25℃、湿度40%RHの状態におき結露させ、その電気的特性の測定を行い、異常のないことを確認する。				
2. Values				
Item		Data	Testing Conditions	
Output Voltage [V]		15.159	Input Volt.: 200V, Load Current:6.7A	
Line Regulation [mV]		2	Input Volt.: 170~264V, Load Current:6.7A	
Load Regulation [mV]		5	Input Volt.: 200V, Load Current:0~6.7A	

**COSEL**

Model	LDA100W-15	Temperature	25℃
Item	Leakage Current 漏洩電流	Testing Circuitry	Figure B
Object	_____		

## 1. Results

Standards	Leakage Current [mA]		
	Input Volt. 85 [V]	Input Volt. 100 [V]	Input Volt. 132 [V]
(A) DENTORI	---	---	---
(B) IEC60950	---	---	---

Standards	Leakage Current [mA]		
	Input Volt. 170 [V]	Input Volt. 230 [V]	Input Volt. 264 [V]
(B) IEC60950	0.42	0.56	0.64

## 2. Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

交流入力 of 両相について測定し、その大きい方を漏洩電流測定値とする。



# COSEL

Model		LDA100W-15	Temperature Testing Circuitry	25°C Figure C
Item		Line Noise Tolerance 入力雑音耐量		
Object		+15.0V6.7A		

## 1. Results

Pulse Width [ nS ]	MODE	No protection failure should occur 保護回路の誤動作がない	DC-like Regulation of Output Voltage 出力電圧の直流的変動
50	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation
1000	COMMON	OK	no fluctuation
	NORMAL	OK	no fluctuation

## 2. Conditions

Input Voltage : 200 V  
 Pulse Voltage : 2000 V  
 Pulse Cycle : 10 mS  
 Pulse Input Duration : 1 min. or more  
 Load : 100 %

**COSEL**

Model	LDA100W-15	Temperature	25°C
Item	Conducted Emission 雑音端子電圧	Testing Circuitry	Figure D
Object	_____		


## 1. Graph

## Remarks

Input Volt. 230 V

Load 100 %

規格 1: [EN 55022] Class B(QP)  
規格 2: [EN 55022] Class B(平均値)

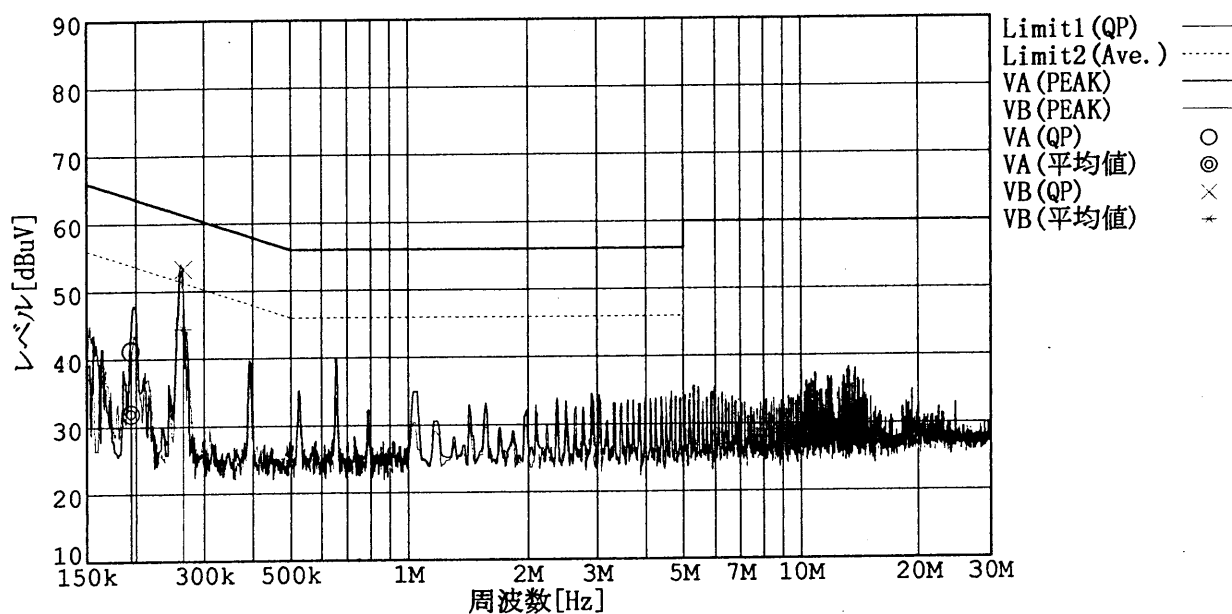

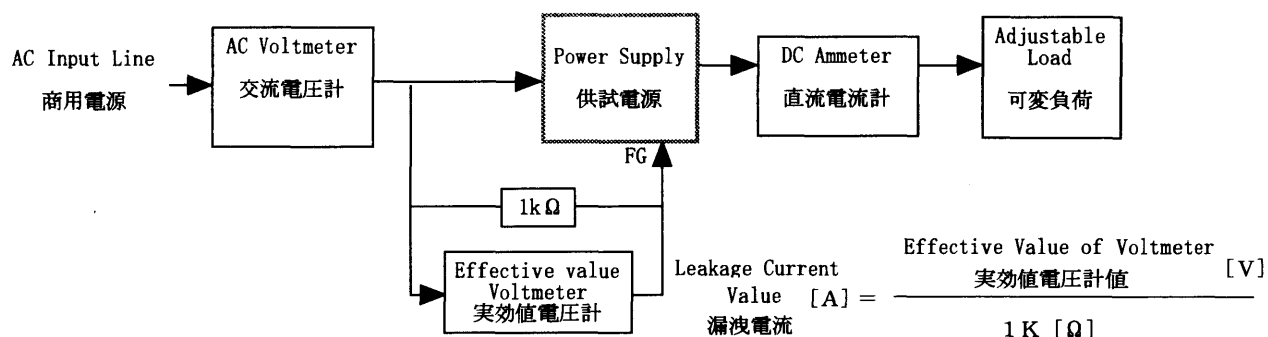
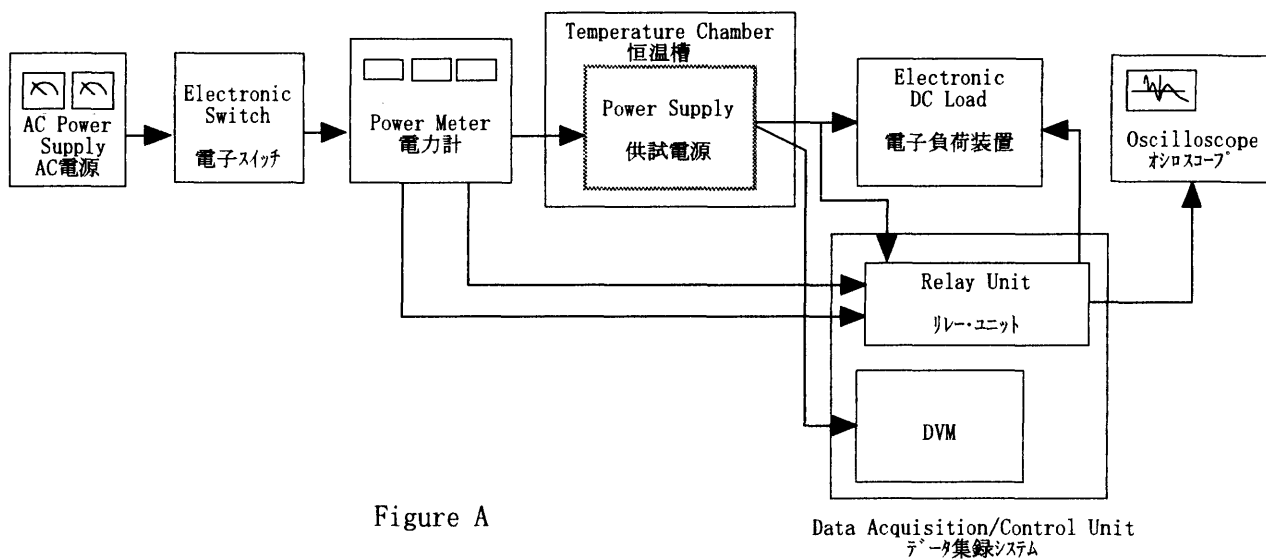


Figure B (DENTORI)

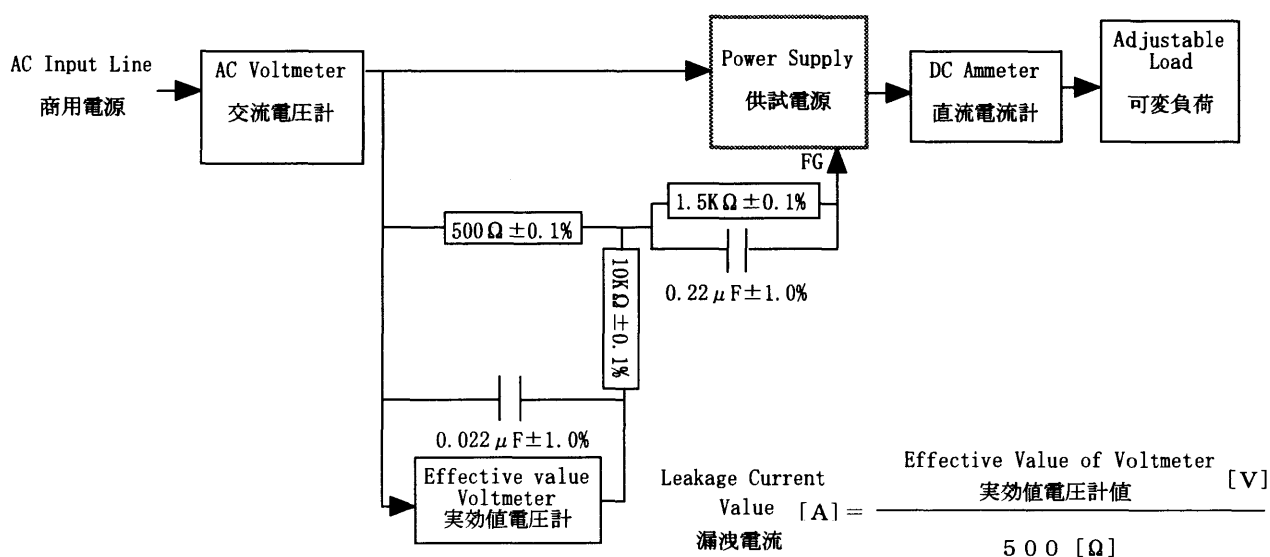


Figure B (IEC 60950)

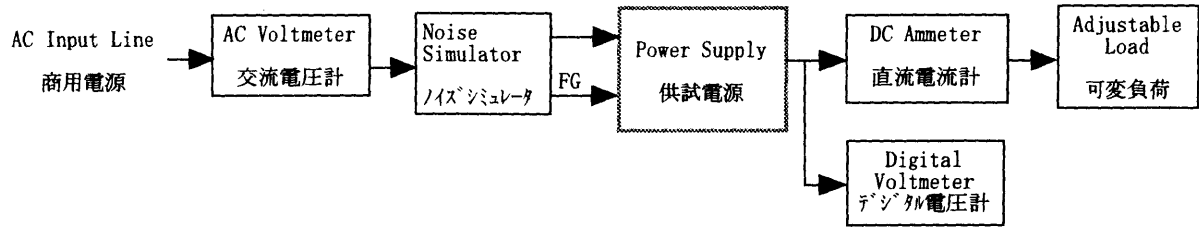


Figure C

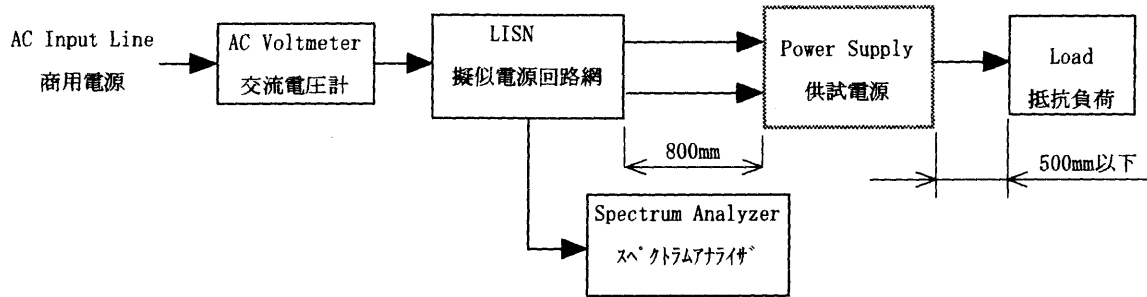


Figure D

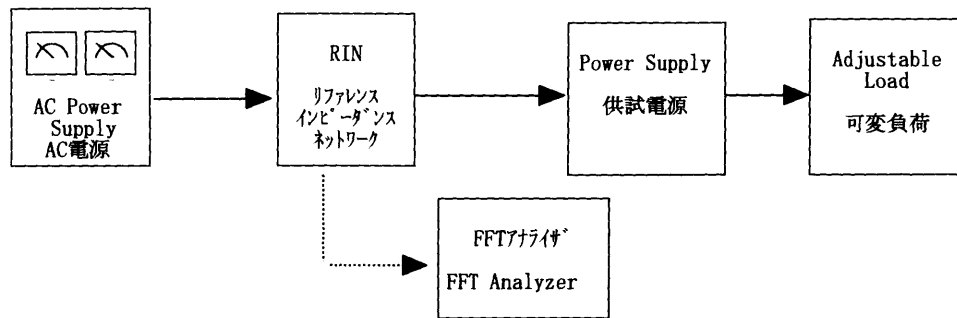


Figure E