




**RADIATED EMISSION**

Model Name : LDA300W-30  
 Model No. :  
 Serial No. :  
 Points : 4  
 Detector : PEAK/QP  
 Polarization : Hori. & Vert.  
 Limit: [CISPR 22] Class B<3m>

Power Supply : P'S 230V 50Hz  
 Temp. : 25degC  
 Humi. : 44%  
 Date : 2003/3/31 18:13  
 Test Equip. : R3132,ESPC  
 Comment :

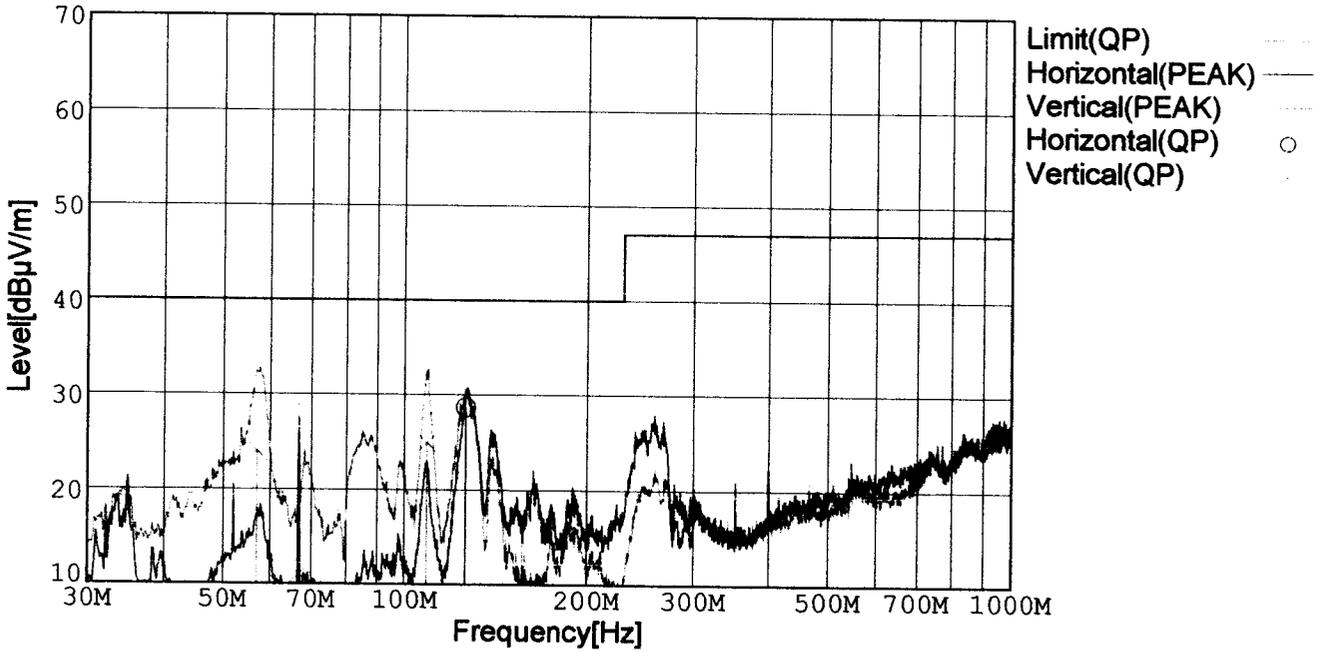

Frequency [MHz]	Meter Reading (QP) [dBµV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBµV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBµV/m]	Margin [dB]
126.114	42.6	BL	11.2	-25.1	28.7	358	156	Hori.	40.0	11.3

BL: Biconi-Log




LINE CONDUCTION

Model Name : LDA300W-30  
 Model No. :  
 Serial No. :  
 Points : 4  
 Detector : PEAK/QP/Ave.  
 Line Mode : VA/VB

Power Supply : 230V(1 Phase) 50Hz  
 Temp. : 25degC  
 Humi. : 44%  
 Date : 2003/4/3 10:01  
 Test Equip. : R3132,ESPC  
 Comment :

Limit1: [CISPR Pub22] Class B(QP)  
 Limit2: [CISPR Pub22] Class B(Ave.)

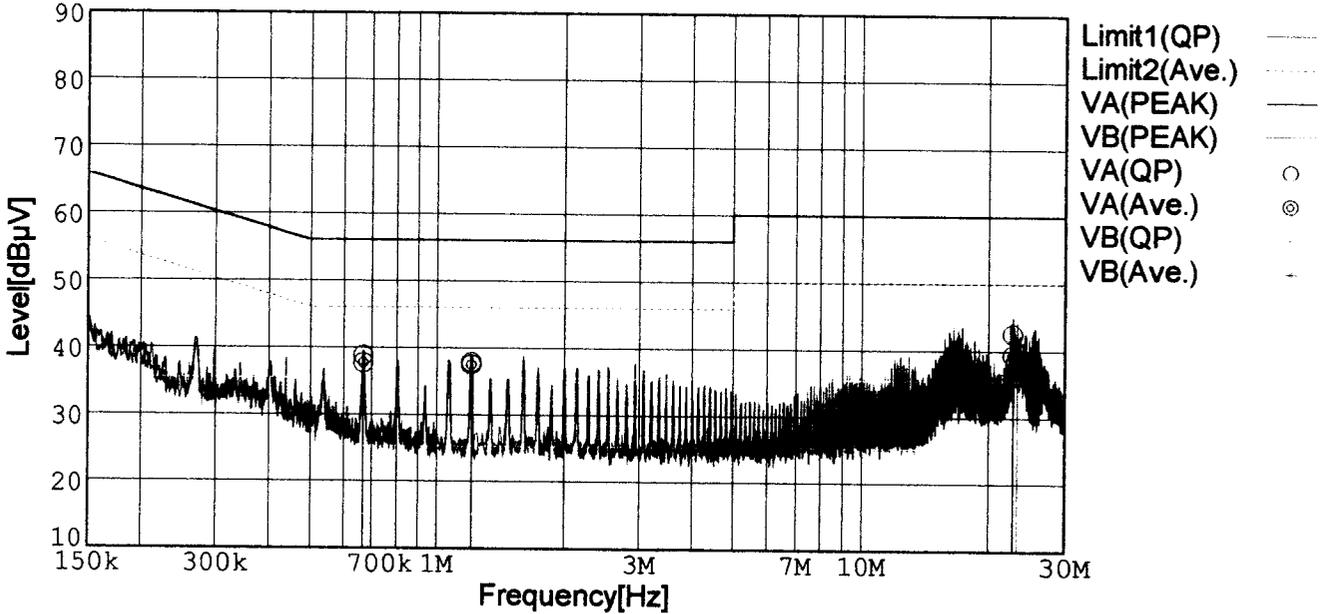

Frequency [MHz]	Meter Reading (QP) [dBµV]	Meter Reading (Ave.) [dBµV]	Factor [dB]	Level (QP) [dBµV]	Level (Ave.) [dBµV]	Line	Limit (QP) [dBµV]	Limit (Ave.) [dBµV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.6701	28.6	27.5	10.1	38.7	37.6	VA	56.0	46.0	17.3	8.4
1.2043	27.7	27.3	10.1	37.8	37.4	VA	56.0	46.0	18.2	8.6
22.8756	31.6	28.4	10.9	42.5	39.3	VA	60.0	50.0	17.5	10.7
23.4077	29.4	24.6	10.9	40.3	35.5	VB	60.0	50.0	19.7	14.5