



DATA SHEET		Date	07-May-09
Model	LFA10F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45% RH
		Tested by	Y.NAKAMURA

LINE CONDUCTION
 Model Name : LFA10F-24
 Model No. :
 Serial No. :
 Points : 7
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 230V 50Hz
 Limit1: [EN 55022] Class B (QP)
 Limit2: [EN 55022] Class B (Ave.)
 Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2009/5/7 17:13
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

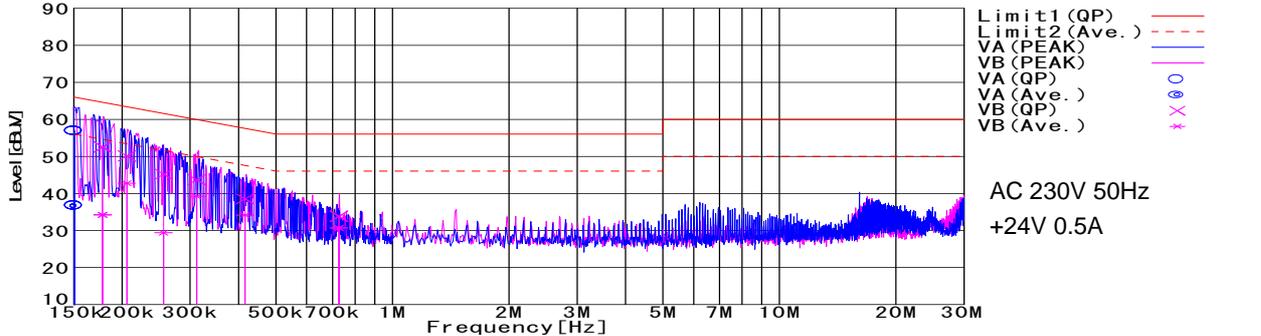

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1506	26.6	47	10	36.6	57	VA	56	66	19.4	9
0.1782	24.2	42.5	10	34.2	52.5	VB	54.6	64.6	20.4	12.1
0.2059	32.8	40.1	10	42.8	50.1	VB	53.4	63.4	10.6	13.3
0.2561	19.4	35.2	10	29.4	45.2	VB	51.6	61.6	22.2	16.4
0.312	29.2	33.7	10	39.2	43.7	VB	49.9	59.9	10.7	16.2
0.4159	24.2	28.5	10	34.2	38.5	VB	47.5	57.5	13.3	19
0.7272	20.6	23.7	10.1	30.7	33.8	VB	46	56	15.3	22.2

RADIATED EMISSION
 Model Name : LFA10F-24
 Model No. :
 Serial No. :
 Points : 2
 Detector : PEAK/QP
 Polarization : Hori. & Vert.
 Power Supply : AC 230V 50Hz
 Limit: [EN 55022] Class B<3m>
 Temp. : 25 degreeC
 Humi. : 45 %
 Date : 2009/5/11 21:23
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

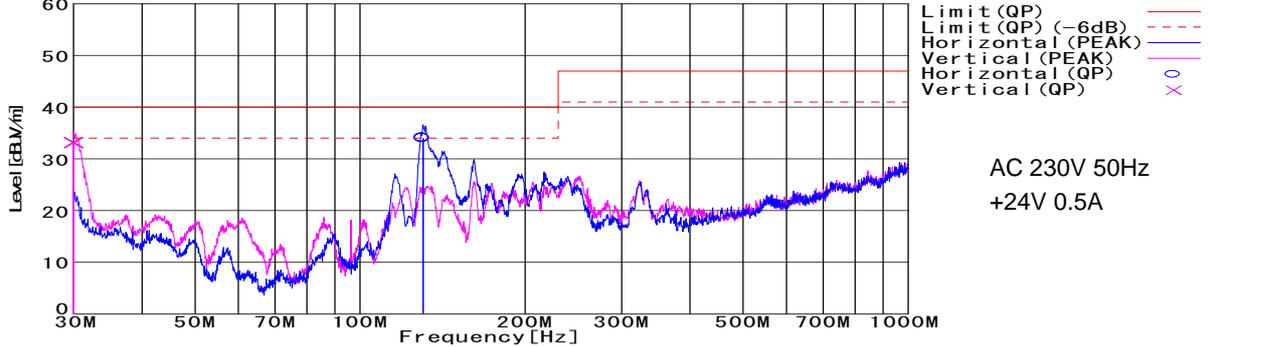


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
130.247	54.4	BL	11.2	-31.6	34	201	144	Hori.	40	6
30.001	47.3	BL	18.2	-32.3	33.2	146	100	Vert.	40	6.8

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

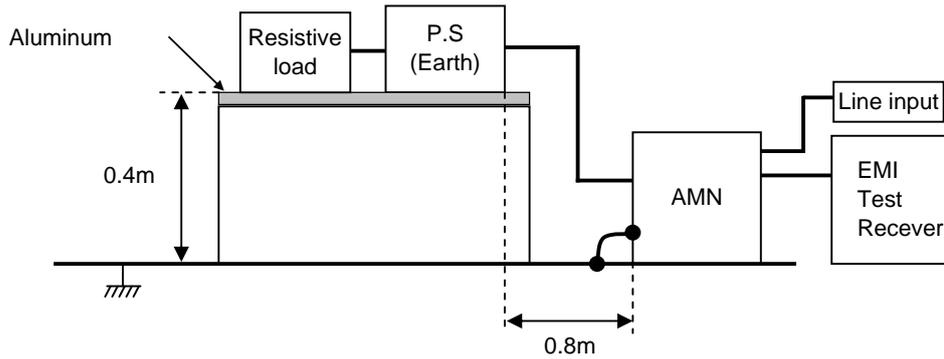

2. Radiated emission

