



DATA SHEET		Date	25-Nov-10
Model	LFA150F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

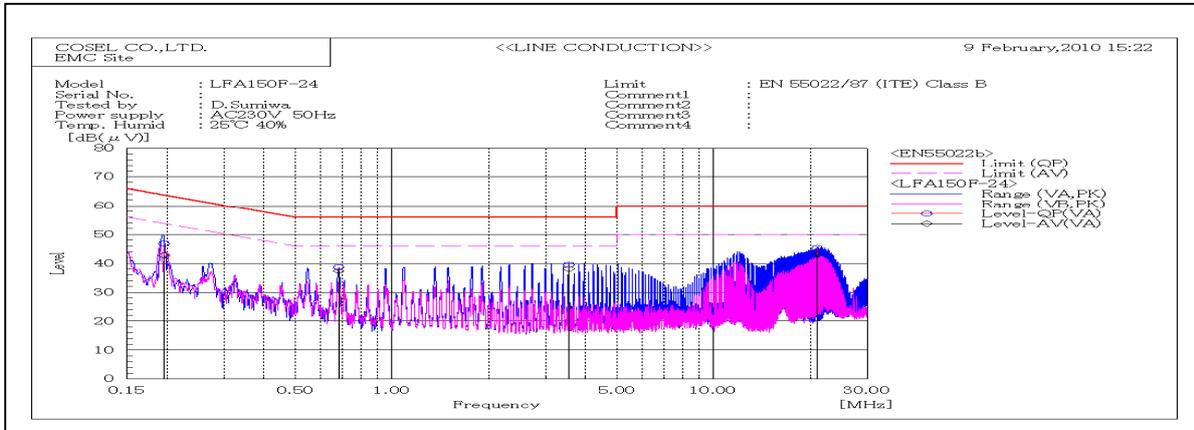

Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.19548	VA	36.6	32.6	10.2	46.8	42.8	63.8	53.8	17	11	Pass	
0.68204	VA	28.6	27.3	10.1	38.7	37.4	56	46	17.3	8.6	Pass	
3.54844	VA	29.2	27.8	10.3	39.5	38.1	56	46	16.5	7.9	Pass	
21.0088	VA	33.9	31.6	11.4	45.3	43	60	50	14.7	7	Pass	

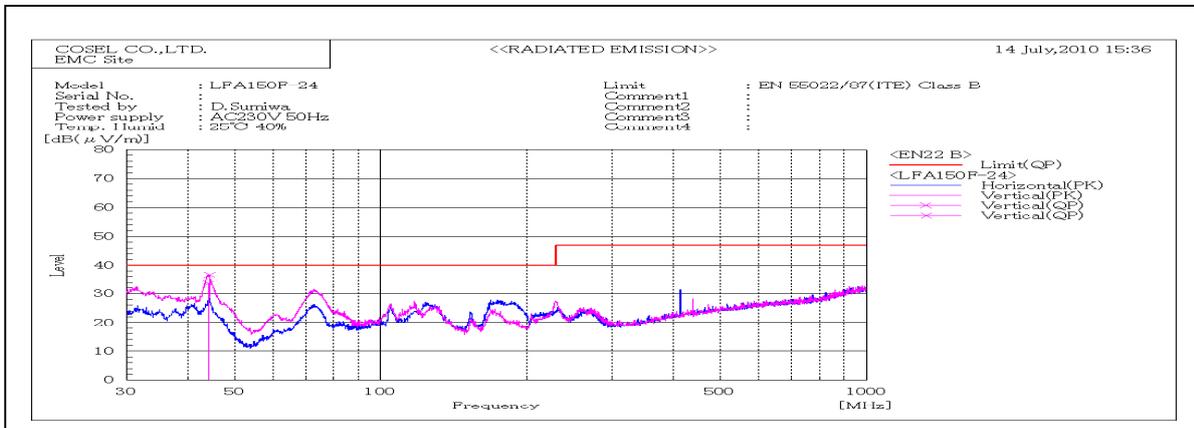


Frequency MHz	Polarization	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
		QP		QP	QP					
44.251	V	50.7	-16.9	33.8	40	6.2	Pass	141	94	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

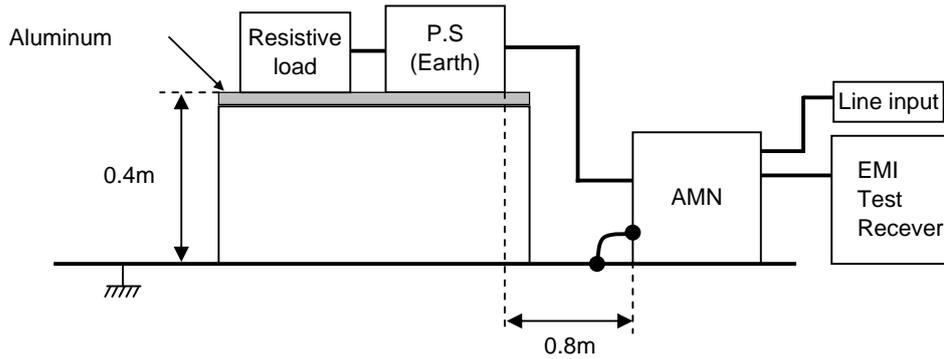

2. Radiated emission

