



DATA SHEET		Date	25-Nov-10
Model	LFA150F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumwia

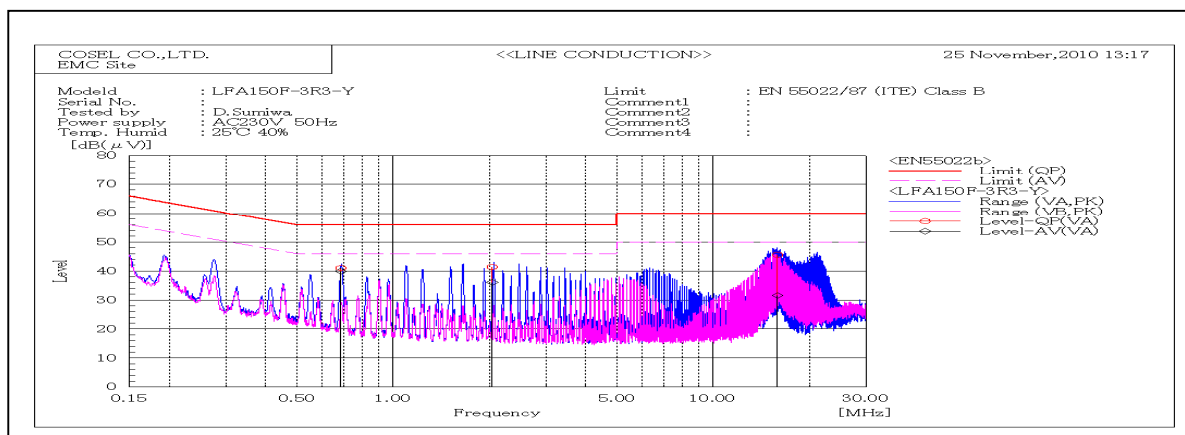

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.68635	VA	30.9	29.8	10.1	41	39.9	56	46	15	6.1	Pass	
2.04027	VA	31.3	26	10.1	41.4	36.1	56	46	14.6	9.9	Pass	
15.89625	VA	35	21	10.6	45.6	31.6	60	50	14.4	18.4	Pass	

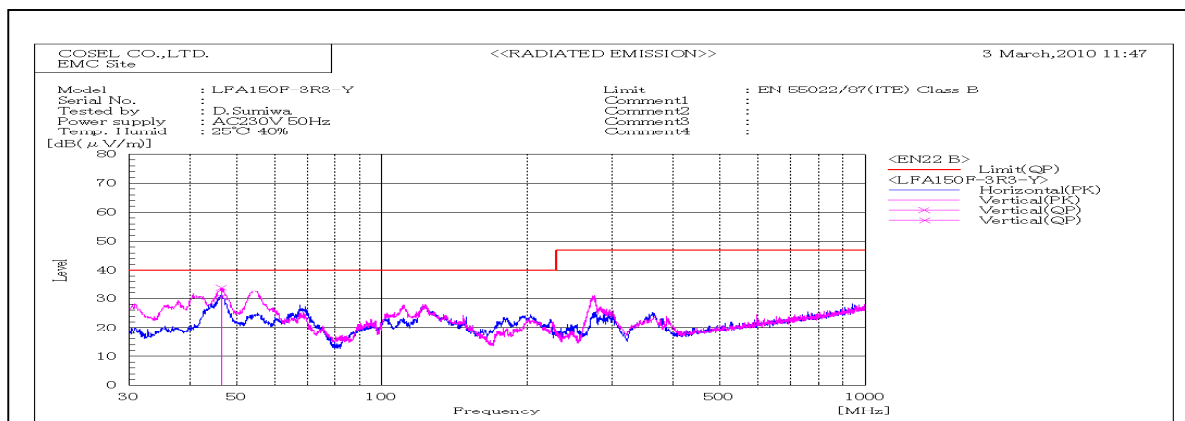

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
46.593	V	52.6	-22.1	30.5	40	9.5	Pass	149	286	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

