



DATA SHEET		Date	25-Nov-10
Model	LFA150F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Sumiya

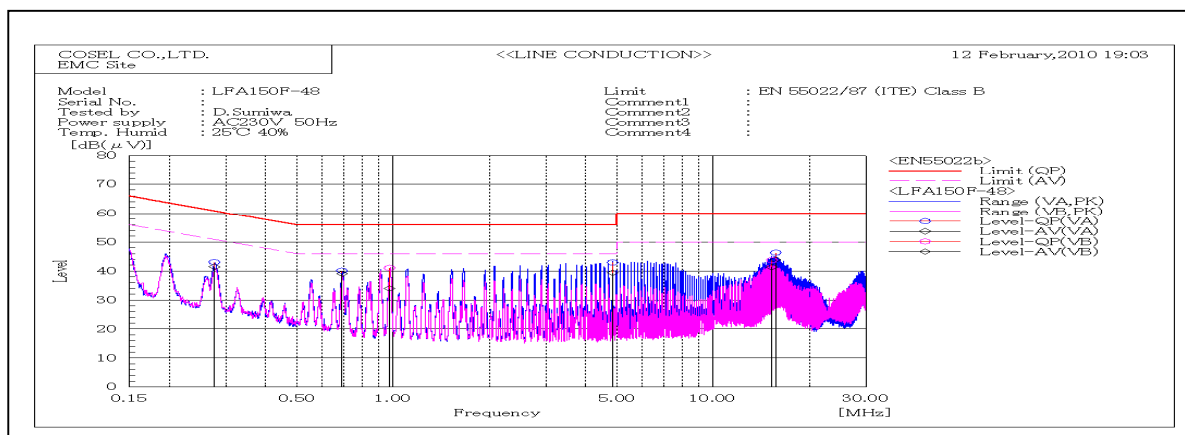

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
15.6789	VA	35.2	32.8	11.1	46.3	43.9	60	50	13.7	6.1	Pass	
15.2634	VB	32.7	30.3	11.1	43.8	41.4	60	50	16.2	8.6	Pass	
4.85596	VA	32.5	28.9	10.4	42.9	39.3	56	46	13.1	6.7	Pass	
0.97514	VB	30.9	23.8	10.2	41.1	34	56	46	14.9	12	Pass	
0.69169	VA	30	29	10.1	40.1	39.1	56	46	15.9	6.9	Pass	
0.2762	VA	33	31.3	10.1	43.1	41.4	60.9	50.9	17.8	9.5	Pass	

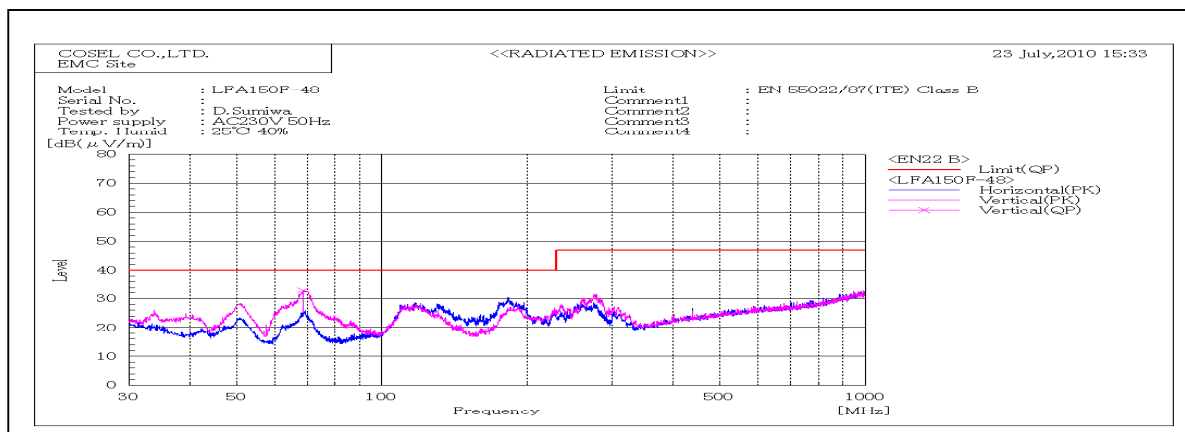

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
					QP	QP					
68.71	V	54.8	-21.8	33	40	40	7	Pass	160	8	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

