



DATA SHEET		Date	25-Nov-10
Model	LFA150F-5-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Kosugi

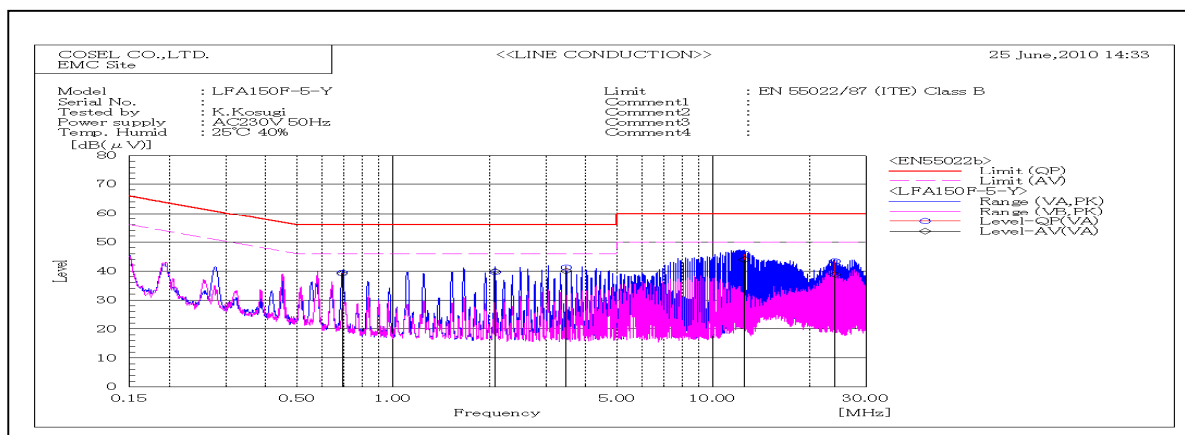

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.69352	VA	29.2	28.9	10.1	39.3	39	56	46	16.7	7	Pass	
2.08414	VA	29.5	29.8	10.1	39.6	39.9	56	46	16.4	6.1	Pass	
24.0486	VA	32.6	27.9	10.8	43.4	38.7	60	50	16.6	11.3	Pass	
12.5141	VA	35.4	33.4	10.5	45.9	43.9	60	50	14.1	6.1	Pass	
3.47437	VA	31	29.8	10.2	41.2	40	56	46	14.8	6	Pass	

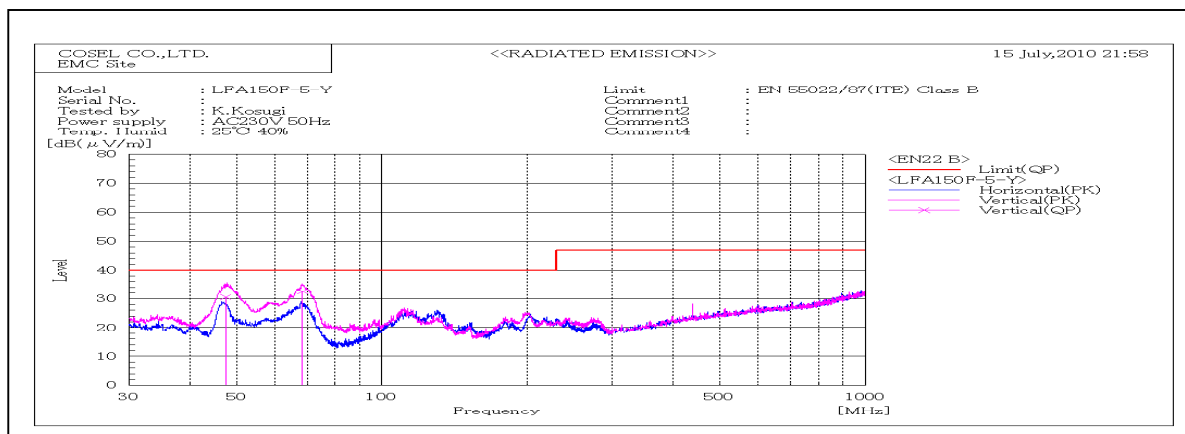

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
47.5	V	49.3	-18.7	30.6	40	9.4	Pass	156	3	
68.555	V	54.3	-21.7	32.6	40	7.4	Pass	132	337	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

