



EXTRA TEST DATA OF LFA300F-12-TY

Regulated DC Power Supply
Nov, 02, 2020

COSEL CO.,LTD.






CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overvoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Power consumption by remote off	5
6.Figure of Testing Circuitry	6




(Final Page 6)

Model	LFA300F-12-TY	Temperature Testing Circuitry Object	25°C A
Item	Inrush Current (enlargement)		
Object	—		

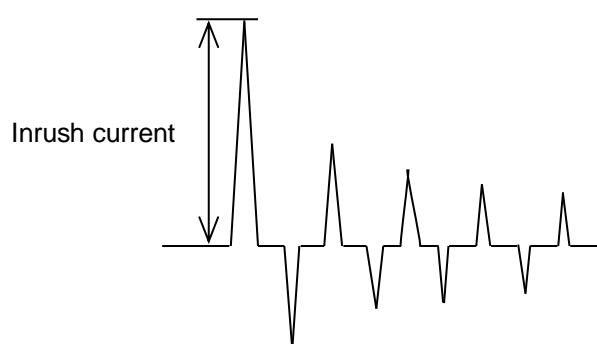
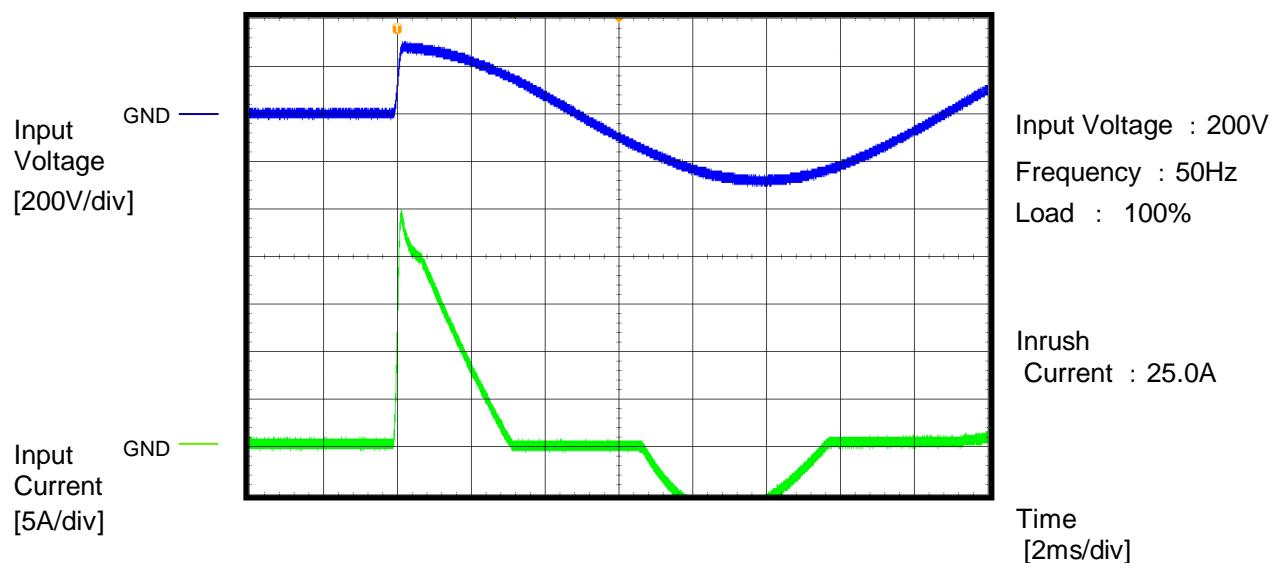
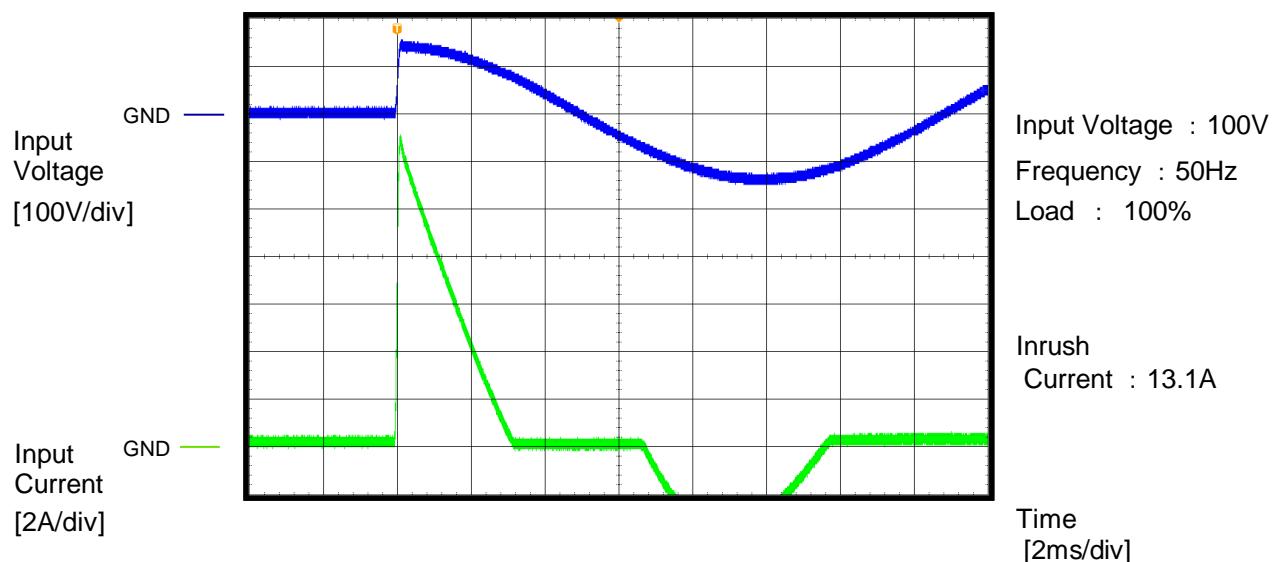


Model	LFA300F-12-TY
Item	Dynamic Line Regulation
Object	_____


Temperature 25°C
Testing Circuitry A

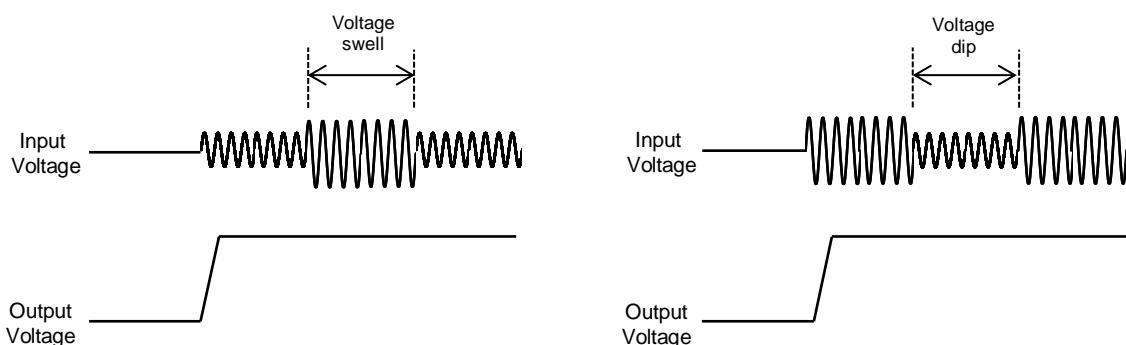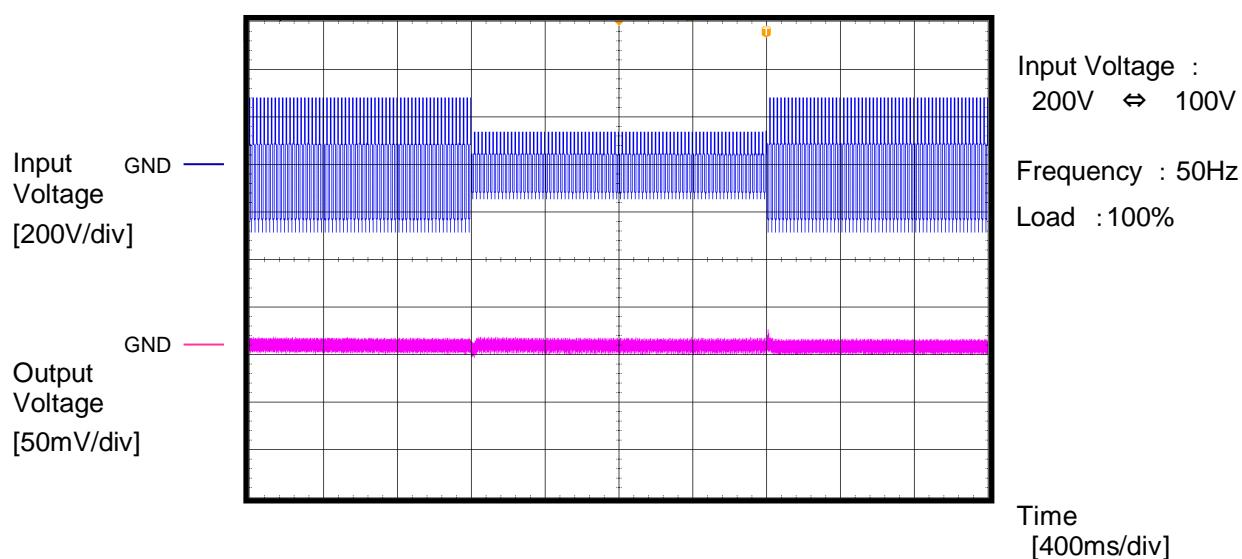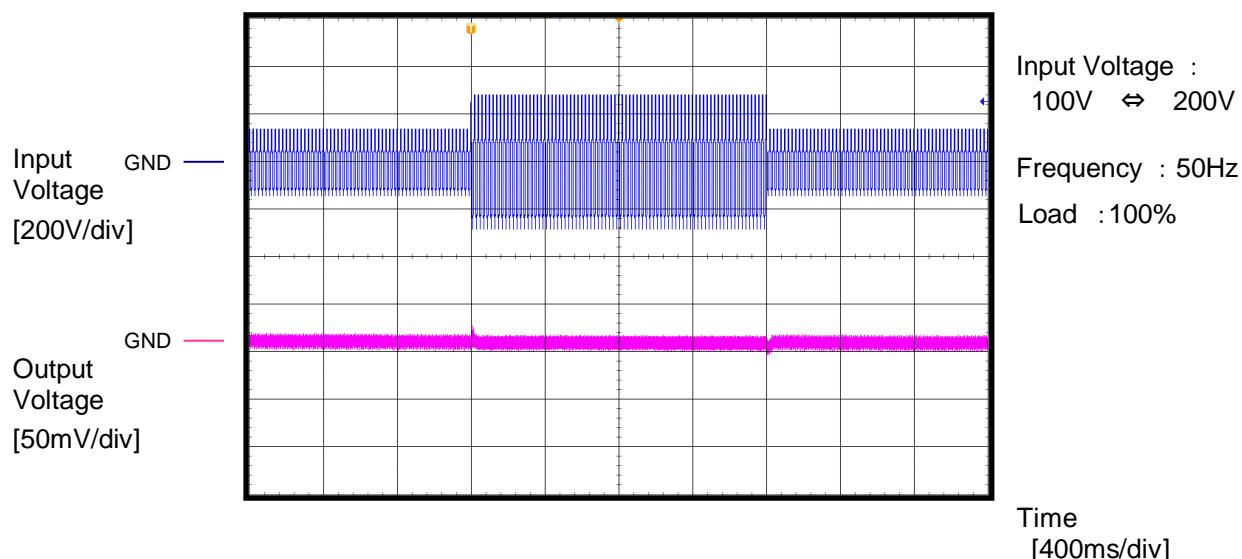

Model	LFA300F-12-TY	Temperature 25°C Testing Circuitry A Input Voltage : 100V
Item	Over Voltage Protection	
Object	_____	

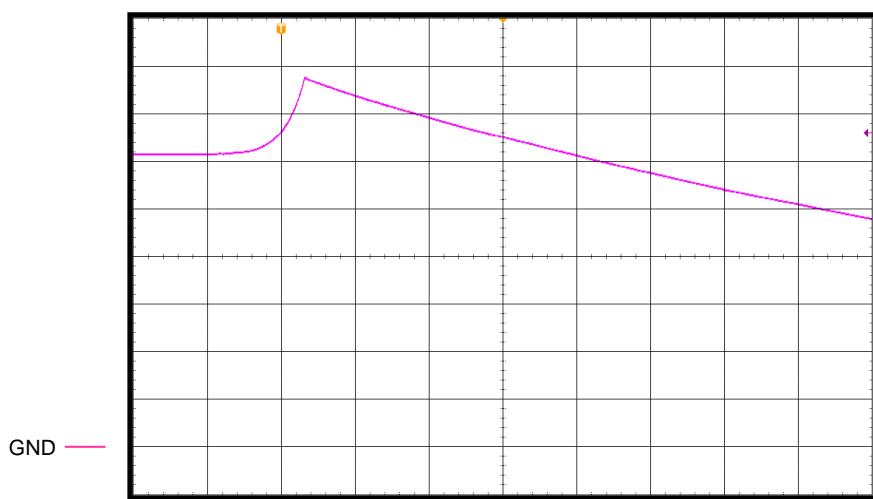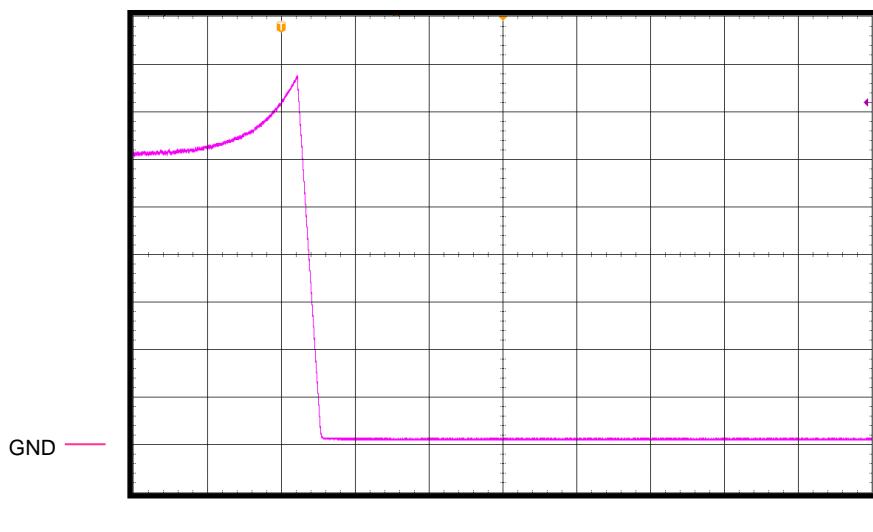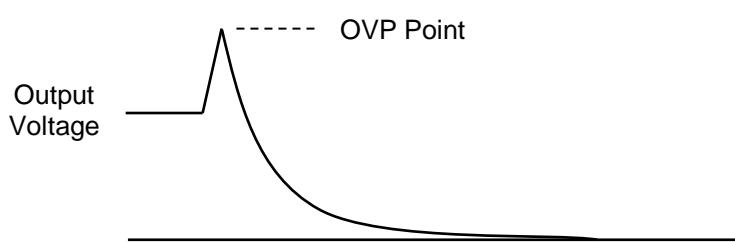Output
Voltage
[2V/div]Load : 0%
Overvoltage protection
value : 15.5VOutput
Voltage
[2V/div]Load : 100%
Overvoltage protection
value : 15.5V


Model	LFA300F-12-TY	Temperature Testing Circuitry Object	25°C A Load : Short
Item	Short Circuit Current		
Object	———		

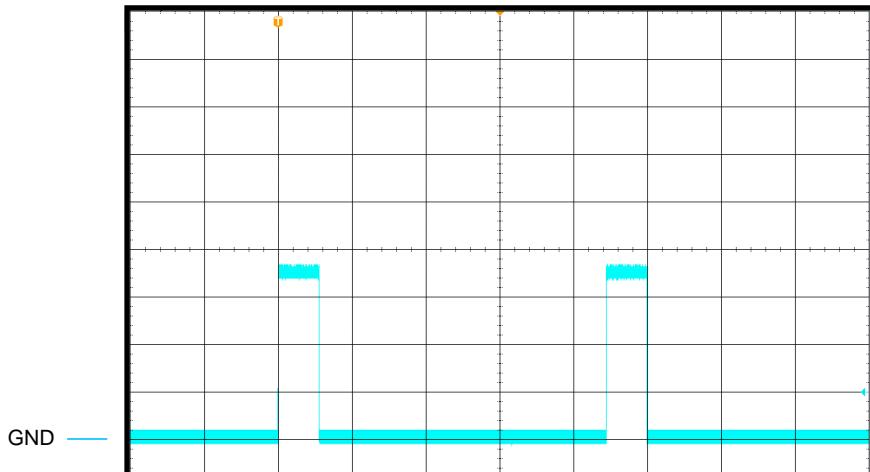Output
Current
[10A/div]

Input Voltage : 100V

Short-circuit
current : 36.8A


ON Time : 1115ms

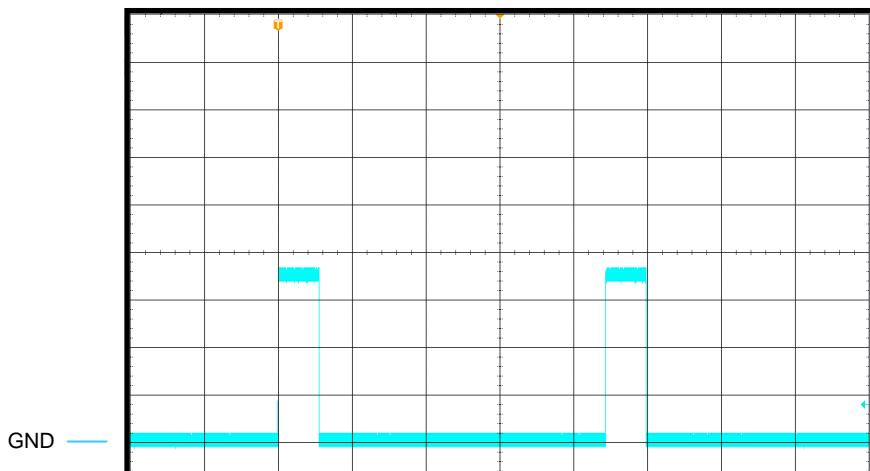Hiccup mode
time : 8889msOutput
Current
[10A/div]

Input Voltage : 200V


Short-circuit
current : 36.8A

ON Time : 1111ms

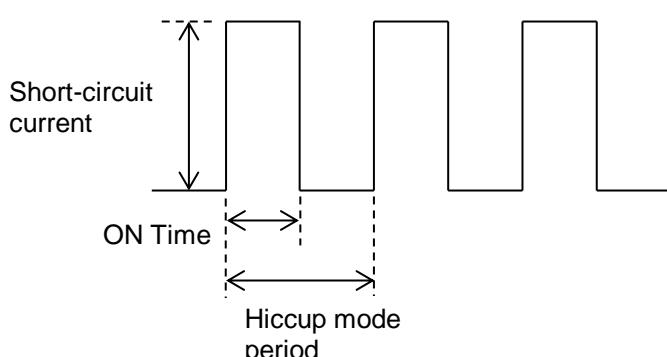Hiccup mode
time : 8869ms

Model	LFA300F-12-RTY	Temperature	25°C
Item	Power consumption by remote off	Testing Circuitry	-
Object	_____		

1.Graph

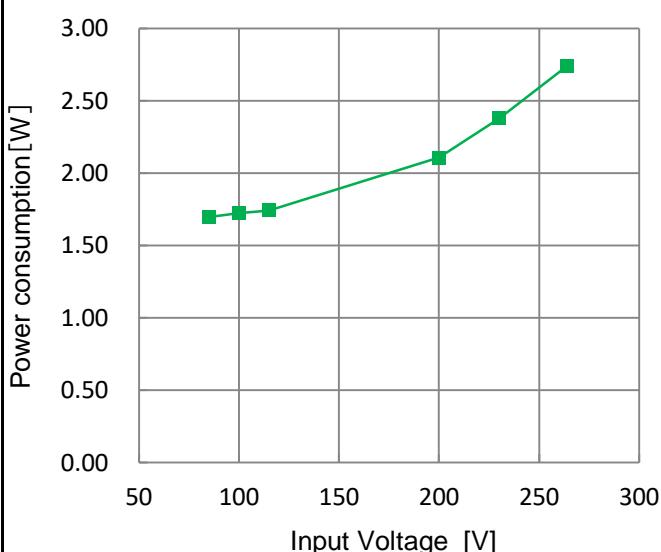

Test result of other output voltage product would be same as this result.

2.Values

Input voltage [V]	Power consumption [W]
85	1.70
100	1.72
115	1.74
200	2.11
230	2.38
264	2.74

Model	LFA300F-12-R2TY	2.Values														
1.Graph	<table border="1"> <thead> <tr> <th>Input voltage [V]</th> <th>Power consumption [W]</th> </tr> </thead> <tbody> <tr> <td>85</td> <td>0.14</td> </tr> <tr> <td>100</td> <td>0.20</td> </tr> <tr> <td>115</td> <td>0.26</td> </tr> <tr> <td>200</td> <td>1.05</td> </tr> <tr> <td>230</td> <td>1.42</td> </tr> <tr> <td>264</td> <td>1.96</td> </tr> </tbody> </table>		Input voltage [V]	Power consumption [W]	85	0.14	100	0.20	115	0.26	200	1.05	230	1.42	264	1.96
Input voltage [V]	Power consumption [W]															
85	0.14															
100	0.20															
115	0.26															
200	1.05															
230	1.42															
264	1.96															
Power consumption [W]	<p>Test result of other output voltage product would be same as this result.</p>															

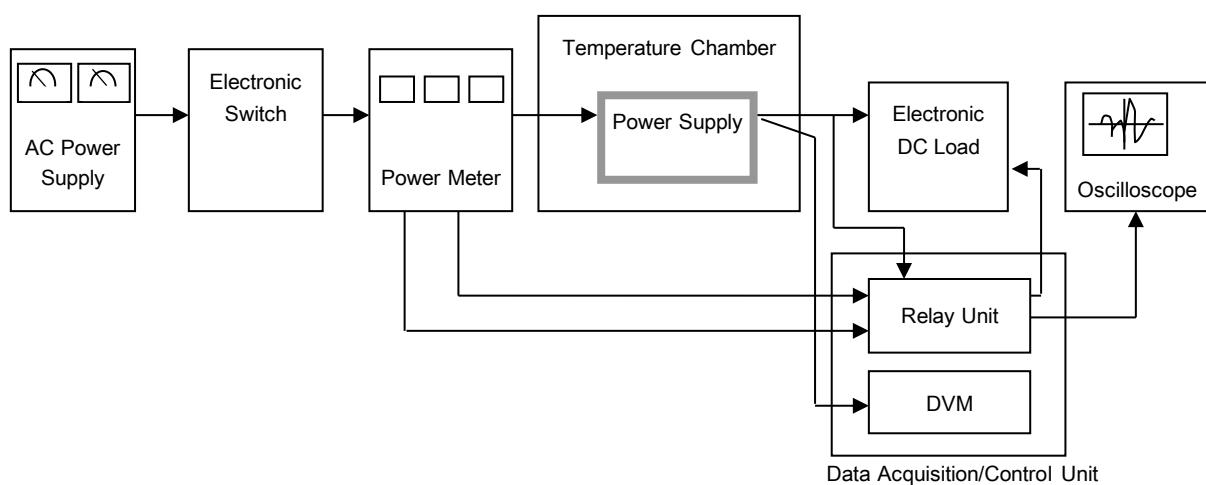


Figure A