



# DATA SHEET

Model		LFA300F-15-TY	Date	28-Dec-10
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	M.Akasofu

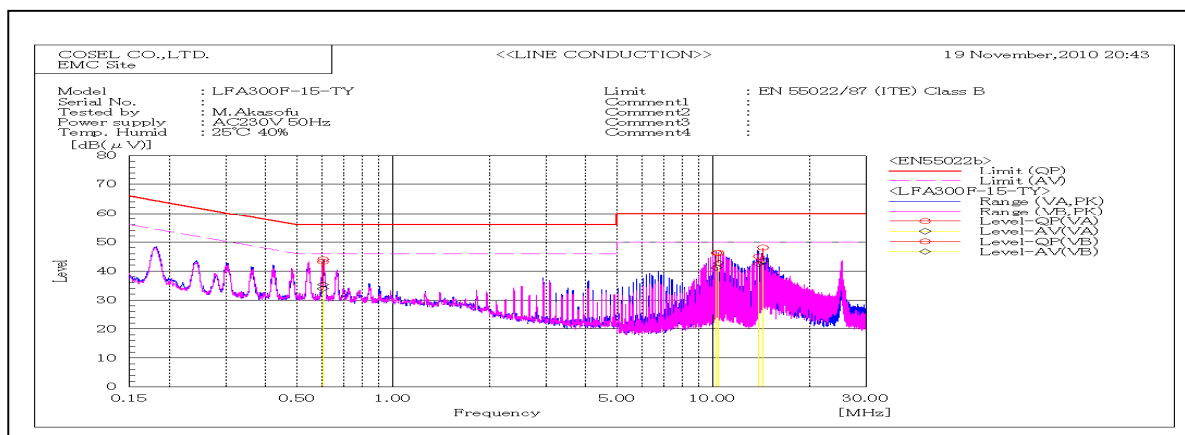

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.60431	VA	33.9	25.2	10.1	44	35.3	56	46	12	10.7	Pass	
0.60372	VB	33.1	23.8	10.1	43.2	33.9	56	46	12.8	12.1	Pass	
10.24375	VA	35.3	30.2	10.9	46.2	41.1	60	50	13.8	8.9	Pass	
10.3865	VB	35.3	31.8	10.9	46.2	42.7	60	50	13.8	7.3	Pass	
13.8974	VB	33.9	31.4	11.1	45	42.5	60	50	15	7.5	Pass	
14.32115	VA	37	32.4	11.1	48.1	43.5	60	50	11.9	6.5	Pass	

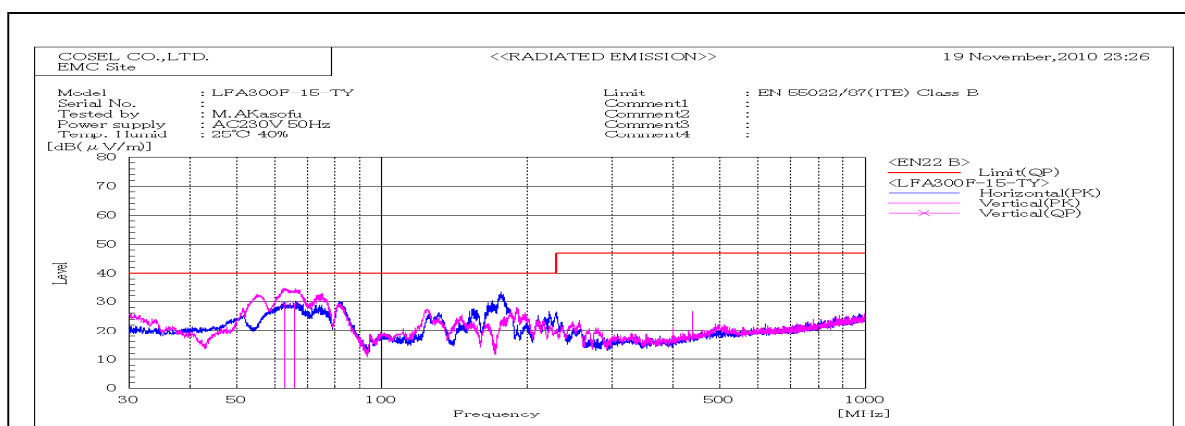

Frequency MHz	Polariz ation	Stability	Reading dB(μV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
62.986	V	Stable	51.6	-22.5		29.1	40	10.9	Pass	119	352	
66.014	V	Stable	51.4	-22.2		29.2	40	10.8	Pass	116	192	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

