


DATA SHEET

Date		04-Aug-09	
Model	LFA75F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	S.IMAMURA

LINE CONDUCTION


Model Name : LFA75F-12
 Model No. :
 Serial No. :
 Points : 11
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC 230V 50Hz
 Limit1 : [EN 55022] Class B (QP)
 Limit2 : [EN 55022] Class B (Ave.)
 Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/4 18:17
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

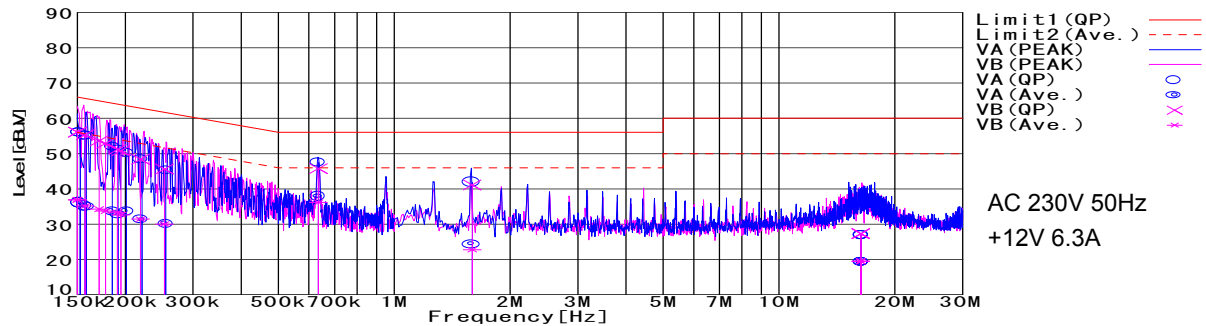

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1585	25	45	10	35	55	VA	55.6	65.6	20.6	10.6
0.1851	23.6	41.8	10	33.6	51.8	VA	54.3	64.3	20.7	12.5
0.1917	22.7	41.2	10	32.7	51.2	VA	54	64	21.3	12.8
0.2011	23.5	40.2	10	33.5	50.2	VA	53.6	63.6	20.1	13.4
0.2547	20	35.3	10	30	45.3	VA	51.6	61.6	21.6	16.3
0.6353	37.3	27.8	10.1	47.4	37.9	VB	56	46	8.6	8.1
1.5942	31.7	14.1	10.2	41.9	24.3	VB	56	46	14.1	21.7
16.3231	16.3	8.5	10.7	27	19.2	VB	60	50	33	30.8

RADIATED EMISSION

Model Name : LFA75F-12
 Model No. :
 Serial No. :
 Points : 1
 Detector : PEAK/QP
 Polarization : Hori. & Vert.
 Power Supply : AC 230V 50Hz
 Limit : [EN 55022] Class B (<3m)
 Temp. : 25 degreeC
 Humi. : 45%
 Date : 2009/6/19 0:38
 Test Equip. : R3132, ESPC
 Load Line : 150mm
 Comment :

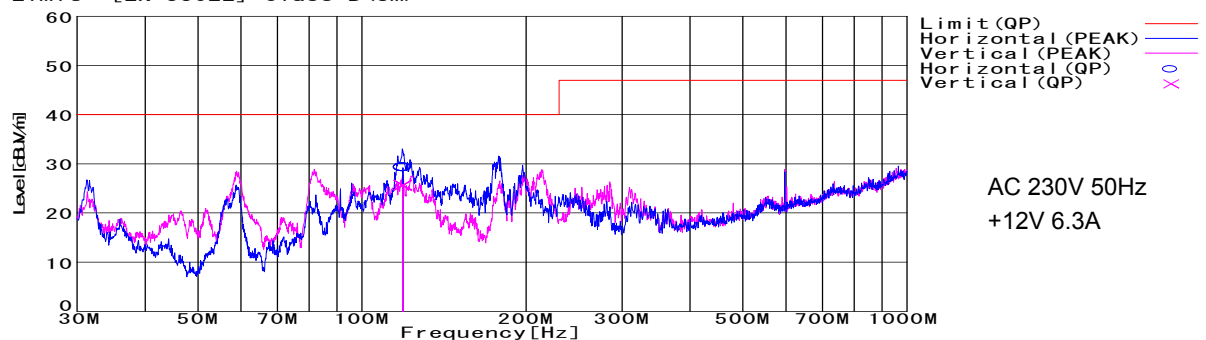

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
118.801	46.4	BL	10.9	-31.7	25.6	277	157	Vert.	40	14.4

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

