



DATA SHEET		Date	09-Feb-13
Model	LFP100F-48-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

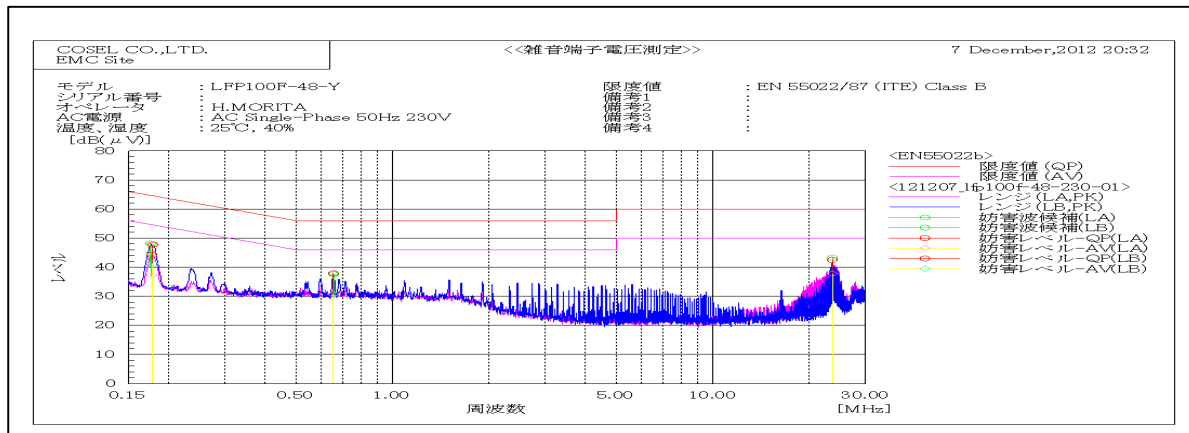


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	CAV		QP	CAV	QP	AV	QP	CAV		
0.17846	LB	30.8	24.3	17	47.8	41.3	64.6	54.6	16.8	13.3	Pass	
0.65486	LB	20.5	13.1	17.5	38	30.6	56	46	18	15.4	Pass	
23.6505	LA	20.1	15.4	22.4	42.5	37.8	60	50	17.5	12.2	Pass	
0.17727	LA	27.3	20.3	16.9	44.2	37.2	64.6	54.6	20.4	17.4	Pass	

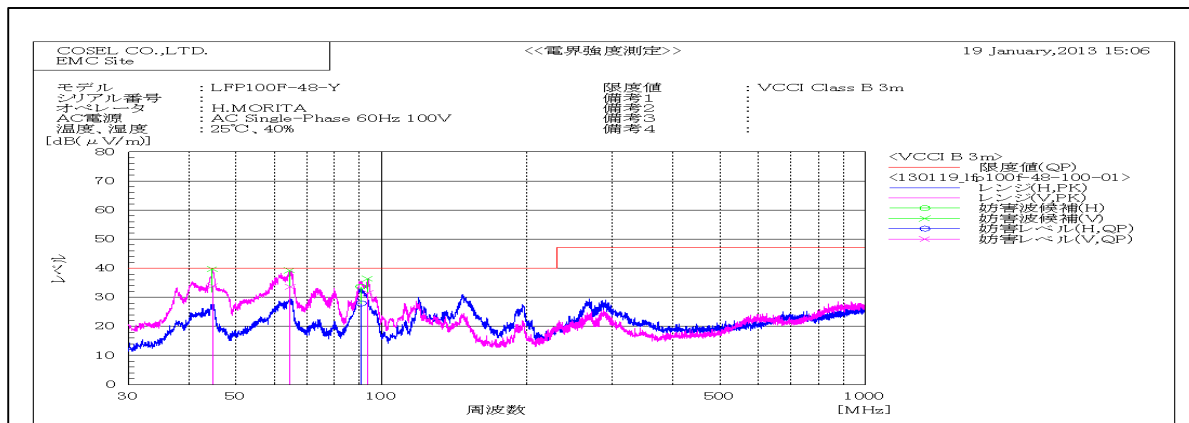

Frequency MHz	Polarization	Stability	Reading dB(μV)		Factor dB(1/m)	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	CAV		QP	CAV					
44.706	V	Stable	48.5		-14.6	33.9		6.1	Pass	112	224	
64.707	V	Stable	49.8		-16.2	33.6		6.4	Pass	99	213	
90.893	H	Stable	45.2		-17.3	27.9		12.1	Pass	188	298	
93.639	V	Stable	53.1		-21.5	31.6		8.4	Pass	114	199	

DATA SHEET		Date	09-Feb-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

### 1. Line conduction

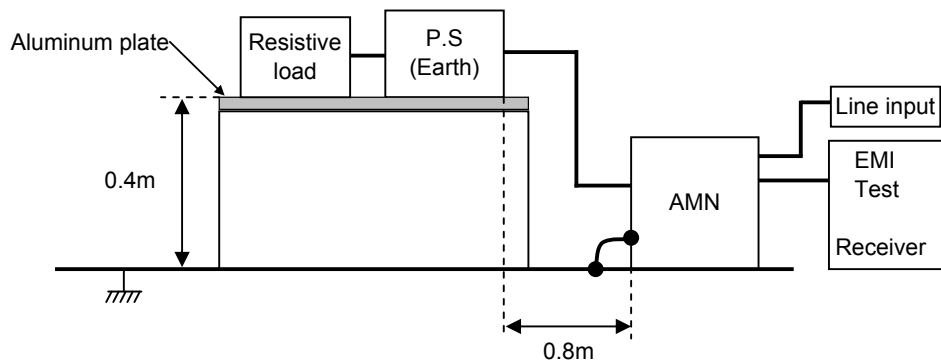

### 2. Radiated emission

