

DATA SHEET

Model LFP150F-36-Y


Date 09-Feb-13

Test EMI
Line conduction & Radiated emission


Temp. 25 degreeC

Humid. 40 %RH

Tested by H.MORITA

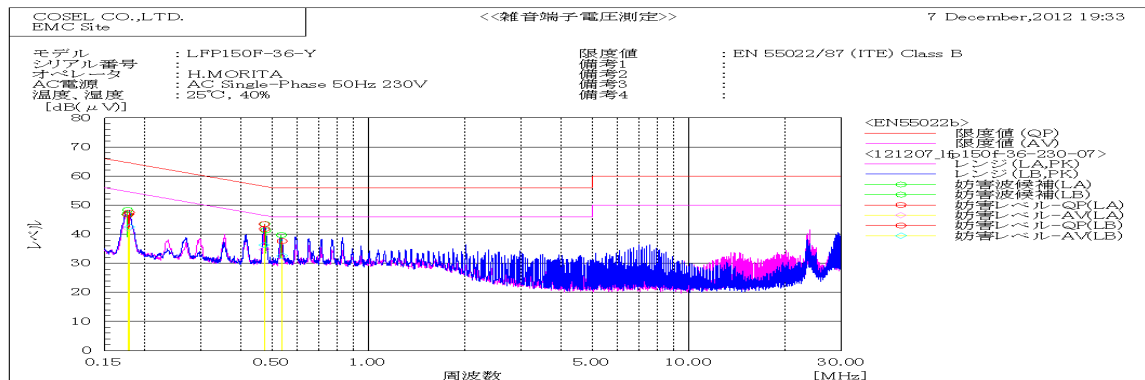


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
		QP	CAV		QP	CAV	QP	AV	QP	CAV		
0.17915	LB	30.4	25.5	17	47.4	42.5	64.5	54.5	17.1	12	Pass	
0.47288	LB	26.1	18.9	17.4	43.5	36.3	56.5	46.5	13	10.2	Pass	
0.47334	LA	24.4	17.3	17.4	41.8	34.7	56.5	46.5	14.7	11.8	Pass	
0.1776	LA	29.8	25	16.9	46.7	41.9	64.6	54.6	17.9	12.7	Pass	
0.53751	LB	20.2	15.2	17.4	37.6	32.6	56	46	18.4	13.4	Pass	

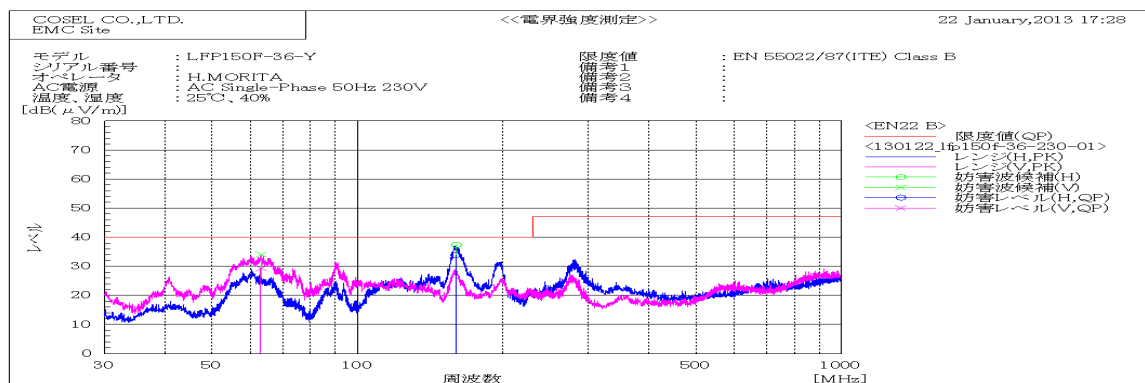

Frequency MHz	Polarization	Stability	Reading dB(uV)		Factor dB(1/m)	Level dB(uV/m)		Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	CAV		QP	CAV						
63.069	V	Stable	45.2		-15.9	29.3		40	10.7	Pass	99	222	
159.397	H	Stable	47.6		-13.7	33.9		40	6.1	Pass	177	13	

DATA SHEET		Date	09-Feb-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

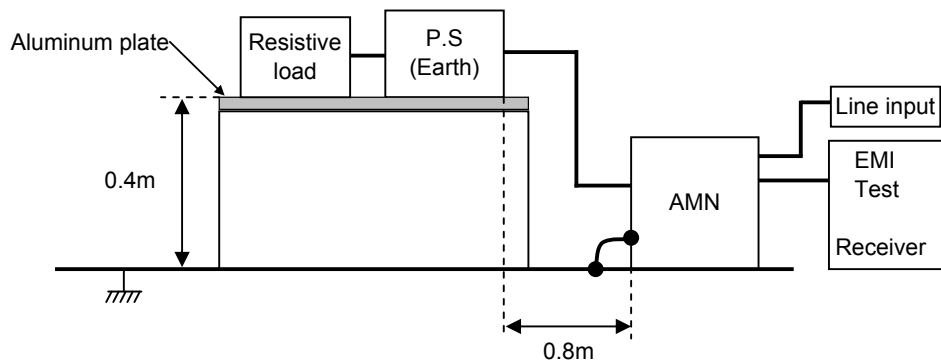

2. Radiated emission

