



DATA SHEET

Model	LFP150F-48-Y	Date	09-Feb-13
Test	EMI Line conduction & Radiated emission	Temp.	25 degreeC
		Humid.	40 %RH
		Tested by	H.MORITA

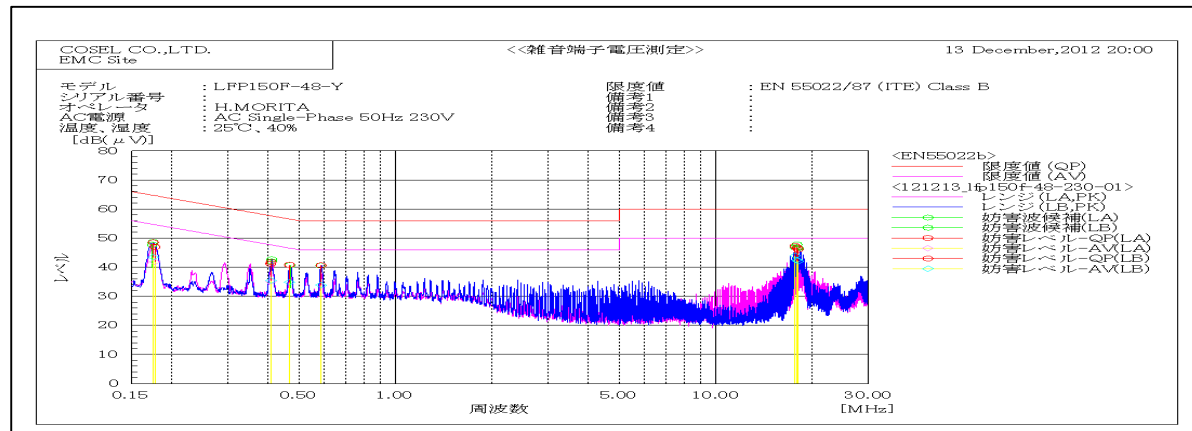


Frequency MHz	Line Phase	Reading dB (uV)		Factor dB	Level dB(uV)		Limit dB (uV)		Margin dB		Pass/ Fail	Remark
		QP	CAV		QP	CAV	QP	AV	QP	CAV		
17.6916	LB	27.1	23.7	20.2	47.3	43.9	60	50	12.7	6.1	Pass	
17.96375	LB	25.9	21.7	20.8	46.7	42.5	60	50	13.3	7.5	Pass	
18.0915	LB	26	21.9	20.2	46.2	42.1	60	50	13.8	7.9	Pass	
0.17724	LA	30.1	24.9	16.9	47	41.8	64.6	54.6	17.6	12.8	Pass	
0.40812	LA	23.8	17.7	17.3	41.1	35	57.7	47.7	16.6	12.7	Pass	
0.40869	LB	24.5	18.2	17.3	41.8	35.5	57.7	47.7	15.9	12.2	Pass	
0.17509	LB	31.5	26.4	17	48.5	43.4	64.7	54.7	16.2	11.3	Pass	
0.58629	LB	23.2	16.5	17.4	40.6	33.9	56	46	15.4	12.1	Pass	
0.46682	LB	23.4	17.5	17.4	40.8	34.9	56.6	46.6	15.8	11.7	Pass	

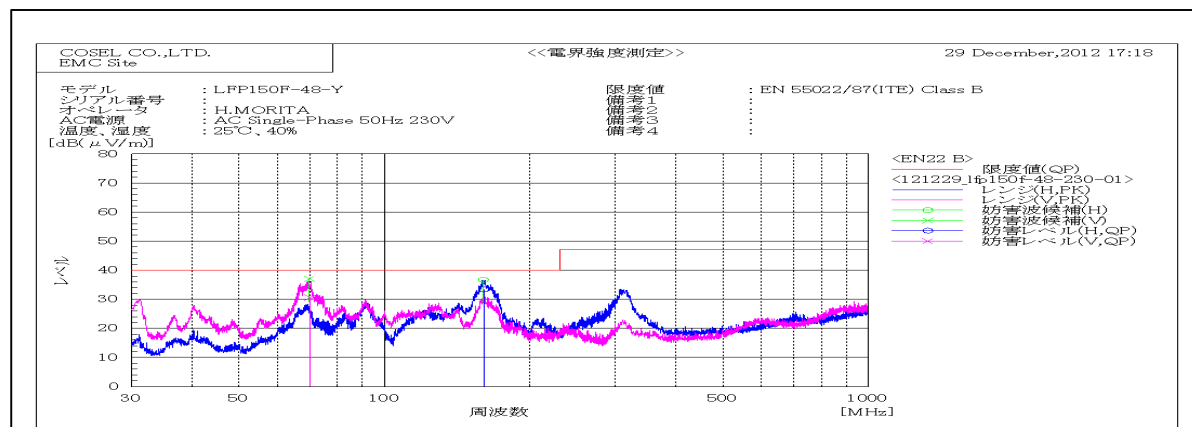

Frequency MHz	Polarization	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
70.088	V	Stable	48.5	-17.9	30.6	40	9.4	Pass	108	205	
160.379	H	Stable	47.4	-13.9	33.5	40	6.5	Pass	195	155	

DATA SHEET		Date	09-Feb-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

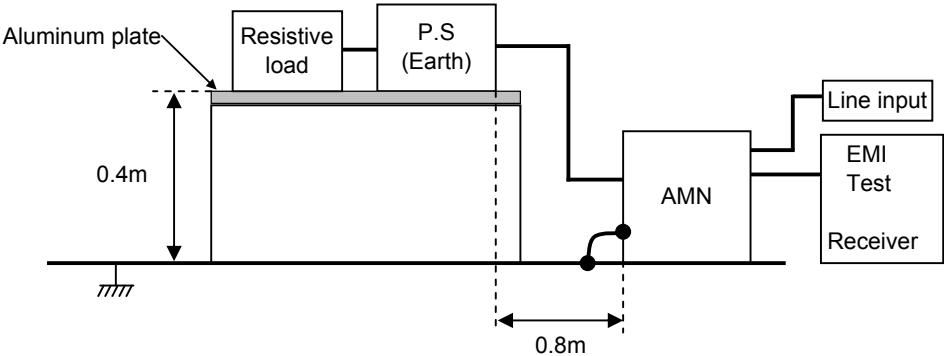

2. Radiated emission

