



DATA SHEET

Model	LFP240F-24-Y	Date	10-Dec-12
Test	EMI Line conduction & Radiated emission	Temp.	25 degreeC
		Humid.	40 %RH
		Tested by	H.MORITA

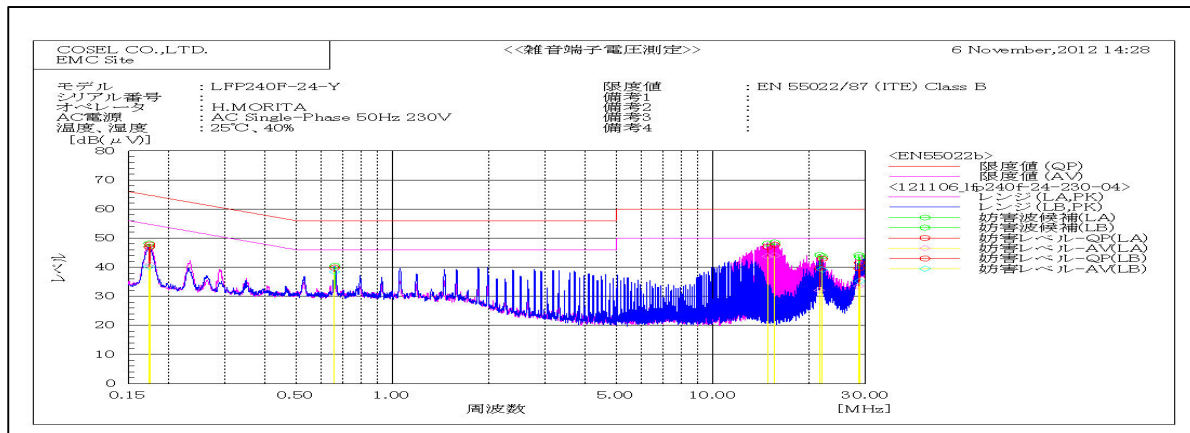


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
14.83395	LA	27.4	24.2	19.6	47	43.8	60	50	13	6.2	Pass	
15.6321	LA	27.9	24.2	19.8	47.7	44	60	50	12.3	6	Pass	
28.6098	LA	16	9.9	23.6	39.6	33.5	60	50	20.4	16.5	Pass	
21.5747	LA	18.4	10.8	21.3	39.7	32.1	60	50	20.3	17.9	Pass	
0.17474	LA	30.9	24.1	16.9	47.8	41	64.7	54.7	16.9	13.7	Pass	
0.17411	LB	29.9	23.2	17	46.9	40.2	64.8	54.8	17.9	14.6	Pass	
0.66007	LB	22.3	20.9	17.5	39.8	38.4	56	46	16.2	7.6	Pass	
21.9917	LB	21.8	18.1	21.1	42.9	39.2	60	50	17.1	10.8	Pass	
28.74785	LB	17.7	11.4	23.8	41.5	35.2	60	50	18.5	14.8	Pass	

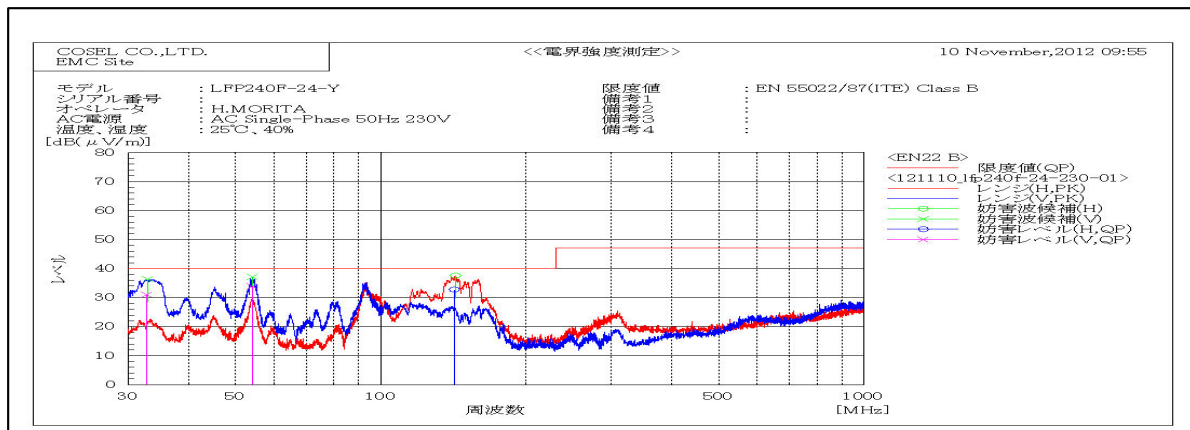

Frequency MHz	Polarization	Stability	Reading dB(μV)		Factor dB(1/m)	Level dB(μV/m)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP			QP	QP					
32.689	V	Stable	47.5		-16.5	31	40	9	Pass	101	357	
54.137	V	Stable	49		-15.1	33.9	40	6.1	Pass	101	255	
141.894	H	Stable	44.1		-11.3	32.8	40	7.2	Pass	197	14	

DATA SHEET		Date	11-Dec-12
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.MORITA

1. Line conduction

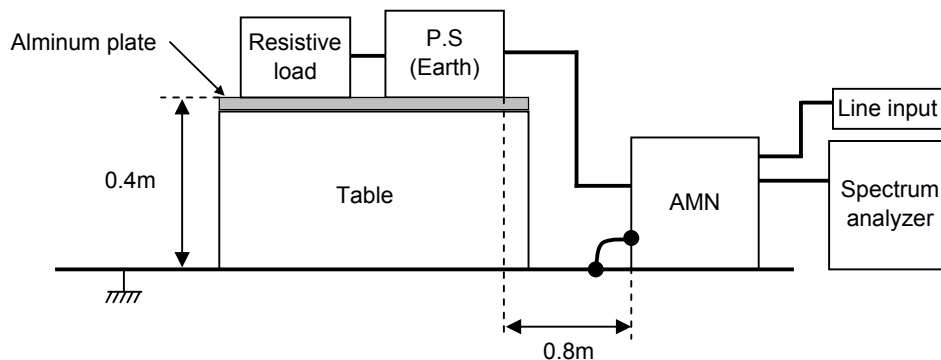

2. Radiated emission

